SCIENTIFIC AMERICAN

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. XXIX.--No. 18. [NEW SERIES.] NEW YORK, NOVEMBER 1, 1873. [$3 per Annum. IN ADVANCE

JOSEPH GILLOTT.

The early history of the steel pen is curiously obscure. The most diligent search fails to discover the first maker or the earliest date of this implement. There were steel, or rather iron, pens—made, we believe, in Holland—as early as the middle of the seventeenth century. Towards the close of last century, Mr. Harrison, an ingenious Birmingham mechanic, made steel pens for Dr. Priestley. One of them is nothing more than a tube turned out of a flat strip of metal, with the sides and point filed away into the shape of a pen. The first actual supply of such pens, it is believed—the authority for the statement is no more than local tradition—was made by a Sheffield workman, whose name is forgotten. From time to time, as far back as 1809, steel pens, hand fashioned, turned and filed, were made as curiosities or luxuries for presents; but it was not until about 1824 that such instruments were produced in considerable quantities, as regular articles of manufacture. Mr. James Perry was the first manufacturer; but the process was tedious and costly. The metal was steel, rolled out of wire, and for this Mr. Perry paid as much as seven shillings a pound. To the first person he employed he gave five shillings for making each pen; and even when the trade had become regular he gave for some years as much as thirty-six shillings per gross to his workmen. Now—thanks to machinery and modern improvements—pens, not very good perhaps, but good enough to write with, can be made and sold at a profit for 3½ cents per gross!

The first great impulse to the steel pen trade was given in 1820, when Joseph Gillott began pen-making; and since then his name has become so closely identified with the trade, and has acquired such a world-wide reputation, that he has come to be regarded as *the* Pen Maker.

Though so long resident in Birmingham, Mr. Joseph Gillott was not a Birmingham man by birth. He was born in Sheffield, on the 11th of October, 1799, the son of a workman in the cutlery trade. His own youth was occupied in this business, in which he was both industrious and skillful; indeed, according to the account of old workmen, he was a noted hand at the forging and grinding of knife blades. In 1821, when Mr. Gillott was in his twenty-second year, trade in Sheffield fell off; and work being scarce, the young workman resolved to transfer himself to Birmingham, where, owing to the variety of occupations, a skilled mechanic need never be idle.

JOSEPH GILLOTT, INVENTOR OF THE STEEL-PEN PRESS.

His earlier employment in Birmingham was in the light steel toy trade—the technical name for the manufacture of steel buckles, chains, and other works and ornaments of that kind. Some specimens of his workmanship in this trade Mr. Gillott always preserved.

After being for a few years engaged in this trade, Mr. Gillott began the manufacture of steel pens. His faculties of invention and adaptation at once came into play. Such pens as were then made were laboriously cut with shears out of the steel, and were trimmed and fashioned with the file in imitation of the quill. Mr. Gillott adapted the press to the making of pens—the stamping press, then much used in the Birmingham trades, and now familiar to everybody who has ever been in the shop of a metal worker. He saw that the press would enable him to dispense with most of the slow and laborious operations of pen-making; that it would cut out the blanks, slit them, bend the metal, stamp the maker's name, and thus, by mechanical means, render production at once rapid and certain. But the conception of this idea and the means of working it out were different matters. The metal had to be prepared by rolling, pickling, and tempering for the action of the press. Then special dies had to be made for each size of pen, and for each operation of stamping to which the blanks had to be submitted. Presses of improved construction—quick, light, easily worked, and yet firm enough to strike a sharp, heavy blow—had to be made. And when these difficulties were overcome, there remained others not less formidable, such as tempering the metal after it had left the press, rendering the newly made pens flexible so as to write easily, cleaning and polishing them without injuring their fineness, and coating them with some kind of varnish, so as to render them attractive to the eye. This was the work which Mr. Gillott had to do; and with much ingenuity and unflagging perseverance he accomplished it.

One of the chief troubles was the extreme hardness of steel pens; when much used, they became pins rather than pens. After many trials Mr. Gillott effected a great and permanent improvement by cutting the side slits in addition to the center slit, which had been solely in use up to that period. To this was afterwards added the cross grinding of the points; and these two processes perfectly succeeded in imparting elasticity to the steel pen, and bringing it up, in this respect, to an equality with "the gray goose quill." It is, however, a curious fact—and one worth noting, if only as evidence of character—that Mr. Gillott himself never used a steel pen; he always wrote with the quill. For some years Mr. Gillott kept his methods of working secret, fashioning his pens with his own hands, assisted by a workwoman whom he afterwards pensioned; and many curious anecdotes of the early days of pen-making have been related by this old lady. She used, for example, to tell with great amusement how the first pens were blued in a frying pan over a garret fire. This was at the period when the pens were sold singly, at high prices. Even after the manufacture had been for some time established, the price kept up. Mr. Gillott has been heard to say that on his wedding day he made seven pounds and four shillings by producing a gross of pens, which he sold at a shilling each.

In 1872, Mr. Gillott employed about 450 persons, the manufacture of pens reached more than five tuns per week, and the prices were reduced from one shilling each to a few pence per gross—all the work of the active brain and skillful hand of one industrious and able man.

Every visitor to Birmingham very properly holds that a visit to these works is both a duty and a pleasure. The courtesy of the attendants, the interest of the processes, the cleanly, orderly industry of the various rooms, the wonderful and delicate skill of the slender fingers, and the ready hands, the millions of the little peaceful weapons fashioned for all parts of the globe, are a marvelous tribute to the genius, perseverance, and liberality of one of the most famous heroes of the arts of peace. All readers will be glad to know that Mr. Gillott's eldest son inherits his father's mechanical genius and generous spirit, and that the world-famous works are not likely to be closed to the public eyes.

It is not only, however, as a pen maker that Mr. Gillott deserves to be remembered. This record would be incomplete without mention of his great collection of pictures. The taste for art was developed early in life. So soon as he had money to spare, Mr. Gillott began to buy pictures. Apart from business, this was the work of his life; the collection constantly grew, both in quality and extent, until at last his house in the Westbourne Road, Edgbaston, and his residence at Stanmore, near London, were crowded with works of Turner, Stanfield, John Linnell, Collins, Muller, Maclise, Leslie, Mulready, Cox, Eastlake, Callcott, Webster, Wilkie, David Roberts, Frith, Hook, Poole, William Hunt, Faed, Nicol, Copley Fielding, Prout, and almost every English artist of note.

The sale of his collection—a lamentable dispersion of art treasures—is too recent to be forgotten by our readers. The enormous produce of the sale, $850,000, affords proof that art not only yields the highest pleasures, but pays in a commercial sense, for Mr. Gillott's pictures brought, in all cases, a large profit upon their purchased price.

Mr. Gillott's figure was short, sturdy, square; his hair and beard (for many years before his death) silvery and venerable; his forehead broad, well rounded, high; his eyes clear, humorous, and bright; his expression pleasant and as

© 1873 SCIENTIFIC AMERICAN, INC

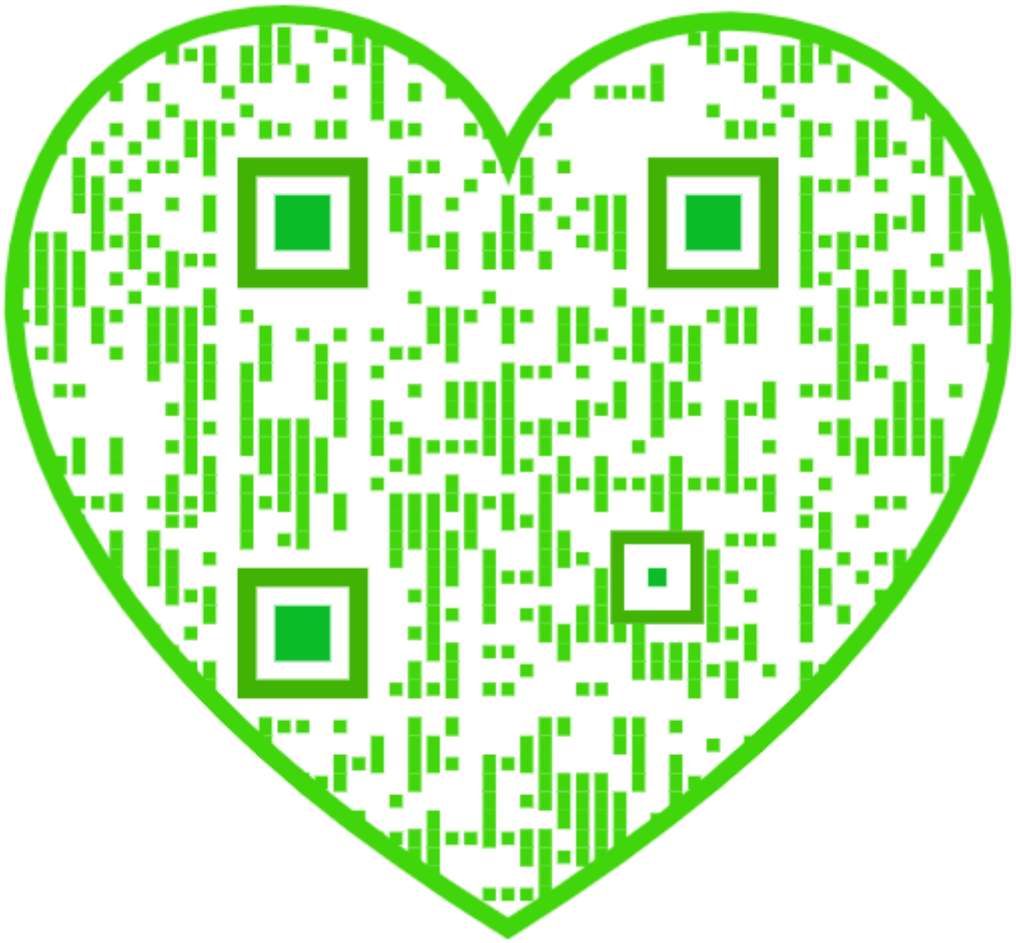

suring; his walk light, active, and firm. His chief characteristics were remarkable quickness and accuracy of observation, wonderful shrewdness, common sense, and frankness; boldness, decision, and enterprise; rare mechanical skill and constructive powers; special talent for arrangement and organization, and rapid and sound judgment on all matters that came before him.

We are indebted to the *Practical Magazine* for the admirable portrait of this remarkable man.

Scientific American.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT

NO. 37 PARK ROW, NEW YORK.

O. D. MUNN. A. E. BEACH.

TERMS.

One copy, one year..... $3 00
One copy, six months..... 1 50
CLUB RATES { Ten copies, one year, each $2 50..... 25 00
{ Over ten copies, same rate, each..... 2 50

VOL. XXIX., No. 18. [NEW SERIES.] *Twenty-eighth Year.*

NEW YORK, SATURDAY, NOVEMBER 1, 1873.

Contents:

(Illustrated articles are marked with an asterisk.)

Alcohol, testing..... 279
Algol, the variable star..... 275
Amazons, up the..... 280
Answers to correspondents..... 282
Bridgeport, Conn., manufactures at..... 276
British Association, the..... 273
Business and personal..... 282
Car coupling, automatic*..... 278
Crank pins, the proper length of.. 276
Discoveries, two interesting..... 272
Feeding and watering cattle in cars*..... 274
Gases, petroleum and pine tar.... 273
Gillott, Joseph*..... 271
Hair worm, the..... 275
Inventions patented in England by Americans..... 281
Journal boxes, taking up the wear of*..... 275
Lathe, an ancient*..... 274
Lubricator, improved*..... 279
Mill pick, improved*..... 278
Oil wells of the United States, the great..... 276
Operatives and foremen, honors to..... 280
Paper manufacture, statistics of.. 274
Paris—Letter from Prof. Thurston 277
Patents, new order by the Commissioner of..... 272
Patents, official list of..... 283
Patents, progress of..... 272
Patents, recent American and foreign..... 281
Permeator, continuous self-feeding*..... 278
Planetary motion*..... 275
Potato blight and rot..... 279
Scientific and practical information..... 273
Secret societies among college students..... 272
Ships, circular*..... 275
Canal boats, trial of..... 281
Vienna exposition, the Japanese department at the*..... 279
Water coolers and filters, Mexican*..... 275
Wild beasts and snakes in India.. 274
Wood and straw paper making in France..... 272
Worry, the effects of..... 278

SECRET SOCIETIES AMONG COLLEGE STUDENTS.

Mortimer M. Leggett, the youngest son of the Commissioner of Patents and a student at Cornell University, was recently accidentally killed during the progress of his so-called initiation into the "mysteries" of a college secret society known as the *Kappa-Alphas*. The circumstances were that the deceased went with a party of members of the above fraternity to a creek just outside the town of Ithaca; and there, blindfolded, he was left, with two companions, standing on the brink of a gorge through which the stream runs. Shortly after, a crashing of bushes, followed by groans, was heard, when the remainder of the party, hastening to the spot, found that the three boys had fallen over a precipice some fifty feet in hight. Young Leggett, it seems struck on his head, sustaining such severe injuries that death ensued in half an hour, while the others were both seriously hurt.

As one of these college fraternities has thus been the indirect means of causing this terrible calamity, we desire just here to express our opinion on the system of secret societies as generally practiced in our institutions of learning. These associations are bodies of students, organized in principle something after the orders of free-masonry or odd-fellowship. In many, the members are numbered by hundreds, and chapters of a single society often exist in a score of colleges at once. The records are handed down from class to class; and out of each set of freshmen, a few individuals are selected for the privilege of membership. When the plan was started (during, we believe, the year 1827) the idea was simply to form clubs of young men, for mutual improvement in debate and such kindred studies as are better pursued by numbers than by single persons, and to keep alive, among *alumni*, pleasant associations of college life. In course of time, the former innocent and laudable object has been lost sight of, or rather relegated to other associations, now existing in many colleges and not included in the list of secret societies; while the cardinal principle of the younger chapters of the latter organizations seems to be nothing more nor less than simple mischief, rendered attractive by a little mystery and concealed under the cloak of such cognomens (symbolized by Greek letters) as "union of souls," "circle of stars," "lovers of wisdom," etc. If the boyish nonsense resulted in the usual students' pranks, it might be passed over with a smile; but such is not the case. The influence exerted, upon boys fresh from school and for the first time free from direct home influence, we believe (from repeated instances within our personal knowledge, and in connection with one of the oldest colleges in this country) to be in a high degree baneful and demoralizing. Unless a youth has well filled pockets, (in which case rival societies vie with each other to see who shall secure him, or rather his money) he is not invited to membership at all. Once joined, however, and held by working upon his fears through the blasphemous oaths of secresy that he is forced to take, he is inducted, by sheer force of example, through a routine of profanity, intemperance and gambling; while in many cases, if young and innocent, his course leads to graver faults, committed more through a sense of shame and false pride than depravity, and due to the tacit if not open instigation of his unscrupulous elders,

The sad and untimely fate of Mr. Leggett, just at the outset of doubtless a brilliant and honorable career in the calling which his father has so ably adorned, will, from the circumstances under which it occurred, excite a lively and widespread sympathy. It is the first death, which, to our knowledge, has been owing, though indirectly, to the proceedings of these student organizations; though we have heard of numerous cases of maiming and injury thus caused, and of idiocy and cerebral disease due to the effect of hideous and ghastly paraphernalia upon the imagination of weak minded boys.

There is a notion, which is becoming entirely too prevalent, that colleges are merely convenient places for sending young men to while they are passing through that uncertain and troublesome age, leading to manhood, during which they are expected to sow their traditional wild oats. To this idea, we believe, may be mainly ascribed the barbarities of "hazing," and the no less reprehensible practices of secret societies; while to it also may be traced many of the complaints that our seminaries are inferior in an educational point of view to those of foreign countries. Hazing, already crushed out in the government naval and military schools, is exciting so large a share of public condemnation that there is a fair prospect of its stern repression in colleges generally. The secret societies, we trust, may meet hereafter with similar treatment, at least through the influence of parents if not at the hands of faculties. Harvard forbids their existence among her students, and Cornell at this time would do well to follow her example.

PROGRESS OF PATENTS.

The following were the number of applications for patents made to the principal governments of the world in the year 1872, as given in the published statistics of the British Patent Office:

	Number of Patents Applied for in 1872.
United States	18,243
France	4,872
Great Britain	3,970
Belgium	1,921
Austria	922
Canada	671
Italy	521
Saxony	259
Sweden and Norway	200
Bavaria	164
Wurtemburg	141
Baden	113
British India	71
Victoria	60
Prussia	56
New South Wales	42
British Guiana (allowed)	28
Cape of Good Hope, from 1860 to 1869	18
New Zealand	18
Mauritius	11
Ceylon	5
Tasmania	5
Jamaica	4

The aggregate number of patents applied for in all of the countries above named, in 1872, except the United States, was 14,072, thus showing that in this country the number of patents annually applied for exceeds, by 4,171, the combined number applied for in all other countries above named. The reason for the surprising difference in favor of this country, in the inventive productions of the world, we believe to be due to the superior theory which prevails here concerning the object and uses of patents. We grant patents for the purpose of encouraging the useful arts. We regard the inventor as a benefactor, and place him under no restrictions in the sale or working of his improvement. We grant patents at so low a price that the masses, the poorer classes, among whom the best inventors are found, may readily obtain and hold them.

WOOD AND STRAW PAPER MAKING IN FRANCE.

The improved processes of making paper from wood, straw, and various grasses, as practiced in France now enables the manufacturers to recover 85 per cent of the caustic alkali, used in the reduction of the raw material into pulp. This is a very important economy.

In order to convert wood into pulp, a strong solution of the alkali is necessary. One pound of carbonate of soda is required to produce four pounds of pulp.

By steeping the wood or straw in the alkali solution, the resinous and other gummy matters are separated from the fibers of the material, and become mixed with the solution. To regain the soda for re-use is now the object of the manufacturer. This is done by evaporating the water by heat, then charring the resulting mass, which yields carbonate of soda, then converting the latter into caustic soda.

The evaporation is effected by passing the products of combustion from the fire which heats the alkaline solution through the liquid which is to be evaporated. For this purpose the liquid is thrown up in the form of a thin spray, by paddle wheels. 12½ pounds of the solution, it is stated, are evaporated for each pound of coal consumed. The carbonate of soda is then subjected to long continued washing in a peculiar apparatus until it is fit for burning, and at last 85 per cent of the original quantity of the alkali is recovered. The former methods only permitted the recovery of from 50 to 60 per cent of the alkali.

TWO INTERESTING DISCOVERIES.

The *America*, a daily journal of Bogota, in a recent issue publishes a letter of Don Joaquin Alvez da Costa, in which he states that his slaves, while working upon the plantation of Porto Alto, Parahyba district, Peru, have discovered a monumental stone, erected by a small colony of Phœnicians who had wandered thither from their native country in the ninth or tenth year in the reign of Hiram, a monarch contemporary with Solomon and who flourished about ten centuries before the Christian era. The monolith bears an inscription of eight lines, written in clear Phœnician characters, without punctuation marks or any visible separation of the words. This has been imperfectly deciphered, but enough has been made out to learn that a party of Canaanites left the port of Aziongaher (Boy-Akaba) and navigated about the coast of Egypt for twelve moons (one year), but were drawn by currents off their course and eventually carried to the present site of Guayaquil, Peru. The stone gives the names of these unfortunate travellers, both male and female, and probably further investigations will shed more light on the records they have left.

Another and more astonishing discovery, we find announced in *Les Mondes*. It appears that some Russian colonists, having penetrated into hitherto unexplored parts of Siberia, have found three living mastodons, identical with those heretofore dug up in that country from frozen sand. No particulars are given as to this, we fear, somewhat questionable find. From the statments of M. Dupont, of the Brussels Royal Academy, it would seem that, like the reindeer, the mastodon should not now be extinct, and that the animal is naturally the contemporary of the horse, sheep and pig. Hence the announcement is not without some shadow of probability.

NEW ORDER BY THE COMMISSIONER OF PATENTS.

The subjoined order, recently issued by the Commissioner of Patents, will be fully appreciated by inventors and their representatives, exhibiting, as it does, a determination at headquarters that the chronic indolence heretofore prevailing among certain examiners, shall no longer be tolerated.

U. S. PATENT OFFICE,
Washington, D. C., October 3, 1873

I have noticed, for more than two years past, that a few of the Examiners are generally from one to two months behind with the work in their rooms. The fact that they so uniformly have about the same number of cases on hand is evidence to me that, with proper effort, they might keep their work closely up to date. The answering of letters and the making of excuses, in consequence of being so far behind, are causes of great loss of time. I shall expect the work of the Office to be promptly up to date by the tenth day of November. If, to do this, it becomes necessary for Examiners to demand of their subordinates more than six hours labor per day, they will do so; but the work must be brought up to that date, and thereafter kept up.

(Signed) M. D. LEGGETT,
Commissioner of Patents

The tedious delays in the matter of official decisions often deter inventors from applying for patents, and are equally discouraging to those having cases pending in the Patent Office. With this rule inflexibly observed, early examination and quick disposal of cases will be insured, thereby largely increasing the business of the Office.

PETROLEUM AND PINE TAR GASES.

Some time ago, it may be remembered, we called attention to the interesting and novel experiments, made by Professor Benevides of Lisbon, Portugal, upon the flame of compressed carbonized gas burning in free air. Ordinary illuminating gas and marsh gas (light carburetted hydrogen) were the subjects of the investigation. Recently the same author has conducted similar inquiries, in reference to gas extracted from the residues of petroleum and of the pine and fir tree, with even more remarkable results.

The gas derived from vegetable sources, used in the experiments, was obtained by the distillation of the residue left after the distillation of the roots, by employing a jet of steam at high tension, which was injected into the distilling cylinders. A liquid was produced from which turpentine was extracted, when there remained a black and thick fluid as residue. The latter, submitted to distillation, disengaged a combustible gas which for some time past has been employed for illuminating several lighthouses on the coast of Portugal. The petroleum gas was obtained by the distillation of the residuum of petroleum by the Hirzel system. The gases, thus arising, as well as those derived from the pine, are mixtures rich in hydrocarburets, a phenomenon analogous to that observed with ordinary illuminating gas obtained by the distillation of coal, and contain, in variable proportions, protocarburet of hydrogen, bicarburet of hydrogen, carbonic oxide, carbonic and sulphydric acids, etc.

Coal gas possesses in general much of the protocarburet and little of the bicarburet. As the proportions of these gases are variable, the density and illuminating power of the mixture likewise vary considerably. The coal gas, as employed in the city of Lisbon and used in the course of the experiments, has a density of 0·4, and its illuminating power, as indicated by the Erdmann apparatus, is 29.

Pine gas has a very pronounced odor resembling that of burned turpentine: its density is 0·8, nearly double that of coal gas. It is a mixture very rich in carbon and requires burners of special construction with very small orifices, in order to avoid the production of smoke and bad odor, as happens when consuming the gas in the ordinary illuminating gas burner.

The air which combines with the flame in the latter case is insufficient to ensure the combustion of the enormous quantity of carbon contained. The illuminating power of this pure gas is much superior to that of coal gas. In experiments with the apparatus above named, while the latter gas gave 29, the former produced an indication as more than 50. The graduation of the instrument stopping at this point (the maximum width of the slit), it was found impossible to cause the brightness of the pure gas flame to disappear entirely, so that the full intensity of its illuminating power could not be

© 1873 SCIENTIFIC AMERICAN, INC

accurately ascertained by this means. With the Bunsen photometer, experiments gave 5 to 1 as the ratio of the respective luminous intensities of pine and coal gas.

Petroleum gas possesses properties analogous to those of pure gas, but has however a different and very strong odor similar to that of phosphuret of hydrogen. Its illuminating power is even stronger than that obtained from gas derived from coal. On burning petroleum gas in a Bunsen burner of ordinary dimensions, the brilliancy of the flame does not entirely depart, as the quantity of air drawn in is not sufficient to cause the consumption of all the contained carbon. When the cock of the rubber sack containing the petroleum or pine gas, under examination in the Bunsen lamp, is very slightly opened, the flame disappears from the upper portion of the burner and leaps to the inferior orifice of the tube. If, however, the said bag be pressed by the hands, the flame returns to the upper part of the burner. Although this experiment may be repeated as often as desired with the gases above named, it cannot be accomplished with coal gas, of which the flame, once produced at the inferior orifice, is not displaced, even if the same pressure be exerted upon the bag as before, thus indicating the greater mechanical energy of the former gases.

Combustion not being complete in Bunsen lamps of ordinary dimensions, the characteristic bands are not clearly defined in the spectra of pine and petroleum gases. The upper part of the flame gives a continuous spectrum, while that of the lower portion is channeled: the lines have the colors of the bands, while red appears at the extremity of the spectrum. On lighting a jet of compressed pine or petroleum gas, escaping from a tube, similar phenomena to those caused with coal gas are observed. With the former gases, however, the effects are amplified by the greater density and larger quantity of carbon contained. The velocity and the escape being great, the flame never commences at the orifice, but an intervening obscure space is produced. If a tube be employed having an exterior opening 1 millimeter in diameter, the flame of compressed coal gas presents no obscure point near the pipe; for if the cock be opened too wide, total extinction of the flame follows. With petroleum or pine gas, the contrary is the case: a quite large non-illuminated space appears near the escape orifice, and at the same time an oscillation of the luminous jet in the direction of its axis is perceptible. If the flame be observed from the side of the tube, a hollow central space, from which combustion is absent, can be perfectly discerned. This, the author considers, confirms his explanation to the effect that the velocity of a gaseous current is greater at the center than at the surface of the jet, for the friction diminishes the velocity of the molecules of the exterior. The mechanical action of the current is also greater at the center; the flame is projected to a greater distance, and there is a stronger displacement of the air in the region near the axis of the jet than at the periphery.

Another experiment gives additional support to this theory If through a bent tube a current of air be directed upon the flame of compressed pine or petroleum gas, in the direction and path of the gaseous current, the obscure space augments and the flame, drawing away from the orifice of the burner, may be projected so far therefrom as to be extinguished. In this case the air, it is believed, augments the mechanical action of the gas, in throwing the flame to a greater distance. If, on the contrary, a draft be applied to the jet in the direction of its axis but in a path opposite to that of the current, the flame approaches the orifice, diminishing the obscure space until the same disappears and the flame begins directly at the escape opening. By this means the gaseous mass is impressed with a movement contrary to that which it possessed on leaving the compressing apparatus, which diminishes the velocity of escape of the current and consequently its mechanical action on the incandescent portion. Again, if the air be injected transversely to the flame, the latter will deviate to the opposite side, through the composition of the motion which the jet had at the point of escape with that impressed by the draft; and at the same time the dimensions and form, both of obscure space and luminous jet, will vary.

Petroleum and pine gases having more carbon than coal gas, in order completely to ensure their consumption more air is required than is necessary for the combustion of ordinary illuminating gas: and thus for compressed gases it is necessary that the velocity of escape be greater for those derived from petroleum and from pine than from coal, in order to have the highest temperature and to cause the complete disappearance of the brilliancy of the flame. It is also for the same reason that the velocity of escape of the former gases should be greater than that of others less rich in carbon, to enable the spectroscope to exhibit with clearness the spectra characteristic of the flame of compressed gas.

SCIENTIFIC AND PRACTICAL INFORMATION.

A NEW SERIES OF AROMATIC HYDROCARBONS.

In the reaction of zinc powder on a mixture of benzine and chloride of benzyl, there are produced, besides diphenyl-methane (benzyl-benzine) some other hydrocarbons, which M. Zincke has recently succeeded in isolating.

After the distillation of diphenyl-methane, the temperature rises rapidly up to the limit of the indications of the mercurial thermometer, and a liquid is distilled which coagulates on cooling into a clotted and crystalline pasty mass. At the end of the distillation, a solid yellow body is passed and the residue cokes. The crystalline mass was treated with a little ether and pressed between sheets of paper to carry away the liquid portion. The etherized solution slowly deposited the crystalline crusts which were joined to the solid portion, and by complete evaporation gave a non-solidifiable oil.

In boiling alcohol the solid portion is deposited in acicular crystals: the mother waters retain a liquid product and another hydrocarbon. The acicular crystals are a mixture of two hydrocarbons; one, which appears to dominate, crystalizes in boiling alcohol in fine and very brilliant layers, or, if the solutions are extended, in rhomboidal transparent tables. This substance is slightly soluble in alcohol, quite so in benzine, chloroform, and sulphide of carbon, though somewhat less in ether. It melts at about 187° Fah. and coagulates at 172·4° into a transparent mass which becomes crystallizable by heat or friction. It does not combine with picric acid.

The second hydrocarbon is much less soluble than the first, crystallizes in fine needles, melts at 172·3° Fah., and coagulates at 154 4°. The separation of these hydrocarbons is very difficult, and ether is the best agent to employ. Their composition is sensibly the same, and the author regards them as to isomeric di-benzyl-benzine, $C_{20}H_{13}$; one of them may, however, be tri-benzyl-benzine, $C_{26}H_{24}$. Their oxidation may give some indications on their molecular weights.

TO DESTROY FIELD MICE.

Smoke, it is well known, will soon destroy these little pests, but how to introduce it into their holes in an easy way may interest some of our readers. Professor Nessler, of Carlsruhe, has devised a sort of pellet which gives off great quantities of smoke when burning, so that it is only necessary to put some of these into the holes and ignite them in order to suffocate the mice. Their preparation is nearly as follows: Some fiberous substance, such as jute, is soaked in a concentrated solution of saltpeter, dried, then dipped in tar, and, when half dry, flowers of sulphur are sprinkled over it. When fully dry the jute fibers are cut into little pieces like pills and are ready for use. As soon as they are ignited they are stuffed into the hole, which is then stopped up with earth.

FLUORENE.

M. Berthelot announces, under the name of fluorene, a new and very fluorescent carburet contained in the portions of the tar of volatile oils between 300° and 340° C.

In order to extract the substance, instead of causing the portions of solid carburet which have passed the distillation between 300° and 305° C. to be crystalized in alcohol simply, a mixture of alcohol and benzine is used. By this means may be separated a small quantity of acenaphtene which remains in the mother liquor. The point of fusion of the mass, which is ordinarily 105° C. after the first distilation and crystalization in pure alcohol, increases to 112° after crystalization in alcohol mixed with benzine. The remainder of the purification consists in redistilation and crystallization in pure alcohol. The carburet possesses a quite pronounced violet fluorescence which, however, disappears promptly on its being exposed to the light. The chemical symbol is stated to be $C^{26}H^{10}$.

THE BRITISH ASSOCIATION.

We continue, from our last, abstracts from papers read at the late meeting at Bradford:

ON PEAT.—BY MR. F. HAHN DANCHELL.

The prime fact in relation to peat is that, in its raw condition, the combustible parts are combined with from 80 to 90 per cent of water, which, for the most part, must be removed before it can constitute fuel. The peat problem may therefore be defined as the economical separation of the two elements—the retention of the solid and the discharge of the fluid. The simplest mode of effecting this is by cutting the peat as sods or bricks, and leaving them to dry in the air and sunshine. To diminish labor, it is frequently suggested, why not dry peat by pressure? If peat were altogether composed of fibers, the water might certainly be squeezed out, as from cotton, or wool, or hair; but a large portion of peat is semi-gelatinous, which, when dry, serves to cement the whole together, and which, moreover, is good for combustion. When peat is compressed, this glutinous constituent escapes with the water, indeed as easily as the water, involving a serious loss. Drying by artificial heat is also frequently proposed; but when it is considered that to obtain 100 tuns of dry peat it is necessary to find space for 500 or 600 tuns of wet peat, which space must be so heated as to permit the evaporation of 500 tuns of water, the economy of the proposition is seen to be highly questionable. But, setting economy aside, it is to be observed that peat cannot be artificially dried without deterioration in quality. The practice of maceration is so old that Pliny refers to it in his description of the inhabitants of North Germany; and yet ever and anon it is advanced as a novelty, and made the subject of patents. The reduction of peat to pulp is one of the easiest of operations. It may be done with the feet, or with any kneading or mincing machine. The most efficient mode of drying is by slow evaporation under roof. Drying goes on more rapidly in the open air if the weather be favorable; but in this country the sky cannot be reckoned upon, and with alternate exposure to wind, rain, and sunshine the quality of peat is much deteriorated. The difference in favor of peat dried under a shed is most marked, and, though the cost of production is greater, the quality affords ample compensation. How much drainage affected the cost of production may be seen from comparing the results from a drained and undrained bog. An undrained bog contains about 90 per cent of water, while a drained one contains 80 per cent. In the one case, therefore, we have 10 per cent of perfectly dry peat, and in the other double that amount. The output will, therefore, be half the quantity from an undrained bog as from a drained one, while the labor is the same. In Holland, Westphalia, Hanover, Holstein and Schleswig, Denmark, Pomerania, and the whole northern part of Germany, Russia, and many parts of Austria, Bavaria, the North of Italy, Switzerland, and extensive districts in both the North and South of France, peat is a general article of consumption, and the inhabitants would, no doubt, hear with some amazement that what is matter of course with them is matter of inquiry with us, and that we want to know whether peat is applicable to iron smelting and other industrial purposes, when they from time immemorial have used little else.

ON THE EFFECT WHICH THE DEPTH OF IMMERSION HAS ON THE RESISTANCE OF A SCREW.—BY PROFESSOR OSBORNE REYNOLDS, M. A.

It has been stated by several writers on the screw propeller, and is, I think, generally supposed, that the resistance of the water to a screw increases with the depth of immersion below the surface. Improvements have been made by Mr. Rennie and Mr. Maudslay which appear to prove this, but I do not think that any theoretical reason has ever been given. Now this idea is so contrary to our fundamental notions of hydraulics that I thought it would be worth while to make experiments. These experiments show us that there is not any increase beyond a certain point, and that this point is that at which the screw ceases to break the surface and get air. In a paper read before the Institution of Naval Architects, I explained how the air getting down to the screw is the cause of racing. In the same way it may be shown that it was the air that was the cause of the diminished resistance near the surface, found by Mr. Rennie and Mr. Maudslay.

The conclusion is that, when a screw is once fairly down below the surface, depth of immersion is of no advantage. Experiments on the effect of immersion on the resistance of screw propeller were made June 8, 1873. The screw was 2 inches in diameter, driven by a spring, which, when wound up, caused it to make 240 revolutions. The resistance at the different depths was measured by the time taken for the spring to run down.

FIRTH'S COAL CUTTING MACHINE.—BY MR. WILLIAM FIRTH, OF LEEDS.

Enough has been said respecting compressed air as a motor to justify the expectation that it is the key to vast and important improvements upon the present system of working coal; and bearing in mind that the wealth, the power, and the greatness of this nation depend primarily upon an abundant supply of coal, it is hardly possible to over rate the importance or over value the advantage which this power places at our disposal. I now turn to the consideration of the machine for cutting the coal, which has for several years been employed at West Ardsley without any interruption. The weight is about 15 hundred weight for an ordinary sized machine; its length, 4 feet; its hight, 2 feet 2 inches; and the gage, 1 foot 6 inches to 2 feet; it is very portable, and easily transferred from one bank to another. The front and hind wheels of the machine are coupled together in a similar manner to the coupled locomotive engines. The "pick" or cutter is double headed, whereby the penetrating power is considerably increased. The groove is now cut to a depth of 3 feet to 3 feet 6 inches at one course, whereas, by the old form of a single blade, we had to pass the machine twice over the face of the coal to accomplish the same depth. The points are loose and cottered into the boss, so that, when one is blunted or broken, it can be replaced in a few moments. It dispenses with the necessity of sending the heavy tools out of the pit to be sharpened, and is an immense improvemen upon the old pick.

When all is in readiness for work, the air is admitted and the reciprocating action commences. It works at a speed of sixty to ninety strokes per minute, varying according to the density of the compressed air, the hardness of the strata to be cut, or the expertness of the attendant. As to the quantity of work in "longwall," a machine can, under favorable circumstances, cut 20 yards in an hour, to a depth of 3 feet, but we consider 10 yards per hour very good work, or say 60 yards in a shift. This is about equal to a day's work of twelve average men, and the persons employed to work the machine are one man, one youth, and one boy, who remove and lay down the road and clear away the *débris*. The machines are built so strong that they rarely get out of working condition. Some of those now working at West Ardsley, and other places, have been in constant use for three or four years. At that colliery there are about eight machines in use. One of the seams is so hard and difficult to manage that it could not be done by hand, and the proprietors had to abandon and did abandon it; but now, by the employment of the machines, it is worked with perfect ease. It is a thin cannel seam with layers of ironstone, and the machines now "hole" for about 1,200 tuns per week. The groove made by the machine is only 2 to 3 inches wide at the face, and 1½ inch at the back; whereas by hand, it is 12 to 18 inches on the face, and 2 to 3 inches at the back. In thick seams worked by hand the holing is often done to a depth of 4 feet 6 inches to 5 feet, and the getter is quite within the hole that he has made; and where the coal does not stick well up to the roof, or where there is a natural parting, there is great difficulty and danger from "falls of coal."

THE consumption of coal for the purpose of gas illumination in Great Britain is estimated at fourteen millions of tuns per annum, valued at sixty millions of dollars. The total annual production of coal in England is one hundred millions of tuns.

© 1873 SCIENTIFIC AMERICAN, INC

FEEDING AND WATERING CATTLE IN RAILROAD CARS.

A London butcher has lately taken out a patent for a convenient device for feeding and watering cattle as they stand in the railway cars. The hay rack, *b*, and the water trough, *a*, are suspended at the end of a balanced lever, *c* (seen in both our illustrations, which we reprint from the *Practical Magazine*). Water is turned on at *g*, till the weight of the trough overbalances the counterpoise, *e*, and descends to the required level. When the animals are well refreshed, the cock, *h*, is opened, the remainder of the water flows away, and the troughs rise out of the way. Our engravings show the complete apparatus in use with an open car (Fig. 1) and a closed car (Fig. 2).

The inventor, Mr. W. J. Bonser, states that such apparatus need be put up only once in every two hundred miles of continuous railway.

In addition to the misery caused by the transit, as at present conducted, it is testified by experts that every bullock, from the moment it leaves the grazier's yard, will lose eight pounds a day in weight, besides loose fat. Professor Simmonds says: "There cannot be a doubt that the feeding and watering of animals on their journey to a fat cattle market would prevent, to a great extent, that waste of tissue which invariably takes place in the traveling of cattle, and would also tend to maintain that juicy and well known superior quality of the meat which is met with in animals killed at home. From a humane point of view, also, it is exceedingly desirable that animals should have both food and water on long journeys, the latter being especially required during the heat of summer."

The cost for apparatus to feed 30 cars of cattle at once is estimated, by a firm of engineers, to be $4,260, a moderate outlay, considering the permanent value of the appliances, and the greatly improved condition of the stock. Such an arrangement is likely to be especially valuable in this country, where journeys of a thousand miles are every day matters, and where cattle suffer and lose in value proportionally to the territory over which they travel.

Fig. 1.

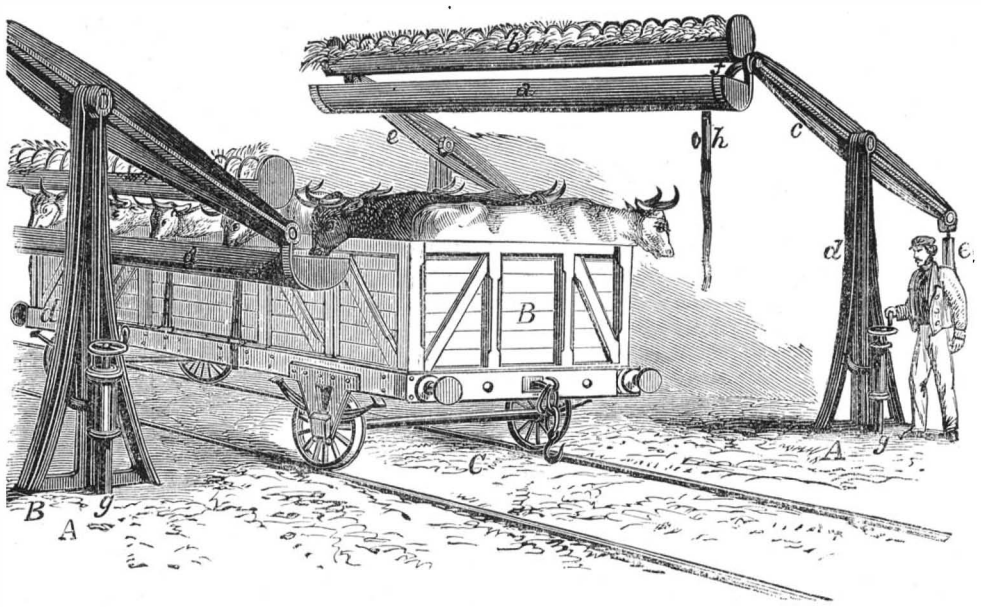

Fig. 2.

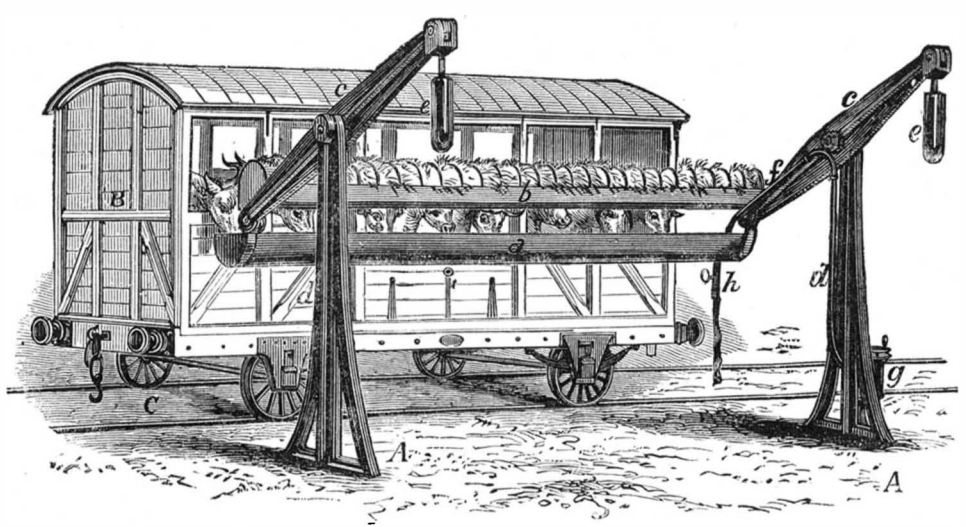

DEVICE FOR FEEDING AND WATERING CATTLE.

Wild Beasts and Snakes in India.

We have previously alluded to the remarkable stories which come to us from abroad of the destruction of human life in India by savage beasts and poisonous serpents. We could hardly credit the reports as true till we read, in the last number of *Land and Water*, the following, taken from official reports:

The number of human beings annually destroyed by wild beasts is one of the most extraordinary features of Indian life. In the recently issued official statement as to the condition of our Eastern Empire, we find the subject again discussed; and it is there remarked that, though rewards are offered by the Government for the killing of these animals, yet in some districts the loss of life is very great; and in others, where it is less excessive, the reason given is that goats are very abundant, and that wolves prefer kids when they can get them. Deaths by snake bites are also very frequent, no fewer than 14,529 persons having perished in that way during the year 1869; while in 1861, the total deaths caused by dangerous animals of all classes amount to 18,078. Dr. Fayrer is of opinion that, if systematic returns were kept, the annual number of deaths from snake bites (exclusive of all doubtful cases) would be found to exceed 20,000. The inhabitants of the border lands between jungle and cultivation are killed and eaten by tigers in such numbers as to require the immediate and serious attention of Government both in India and in England. The following are a few out of many instances: "A single tigress caused the destruction of thirteen villages, and 256 square miles of country were thrown out of cultivation." "Wild beasts frequently obstruct Government survey parties. In 1869, one tigress killed 127 people and stopped a public road for many weeks." "In January, 1868, a panther broke into the town of Chicola, and attacked, without the slightest provocation, the owner of a field; four person were dangerously wounded, and one died." "Man-eating tigers are causing great loss of life along the whole range of the Nallai-Mallai Forest. There are five of them; one is said to have destroyed 100 people." "Writing from Nuyclunka in 1869, a gentleman says one tigress in 1867-8-9 killed respectively, 27, 34, and 47; total, 108 people. This tigress killed a father, mother, and three children, and the week before she was shot she killed seven people." "In Lower Bengal alone, in the period of six years, were killed by wild beasts 13,401. In South Canara, in July, 1867, forty human beings were killed by wild beasts." The Chief Commissioner of the Central Provinces in his reports shows the following returns of human beings killed by tigers: In 1866 and 1867, 372; in 1867-68, 289; in 1868-69, 285; total for three years, 946. It appears that there are difficulties in the way of killing down these tigers. First, the superstition of the natives, who regard "the man-eating tiger" as a kind of incarnate and spiteful divinity whom it is dangerous to offend. Secondly, the failure of Government rewards. Thirdly, the desire of a few in India actually to preserve tigers as game to be shot with the rifle, as a matter of sport. Mr. Frank Buckland suggests an organized destruction of the tiger cubs in the breeding season, and the attraction of fully grown tigers to traps, pitfalls, and other devices, by means of a drug of valerian, of which tigers, which are only gigantic cats, are exceedingly fond.

An Ancient Lathe.

At the Vienna Exposition we find turned objects of wood, such as wooden glasses, bottles, basins, etc., manufactured by the Huculen, the remnants of an old Asiatic nation which had settled at the time of the general migration of nations in the remotest part of Galicia, in the dense forests of the Carpathians. These people manufacture the articles named above, and the instrument they are using for turning them

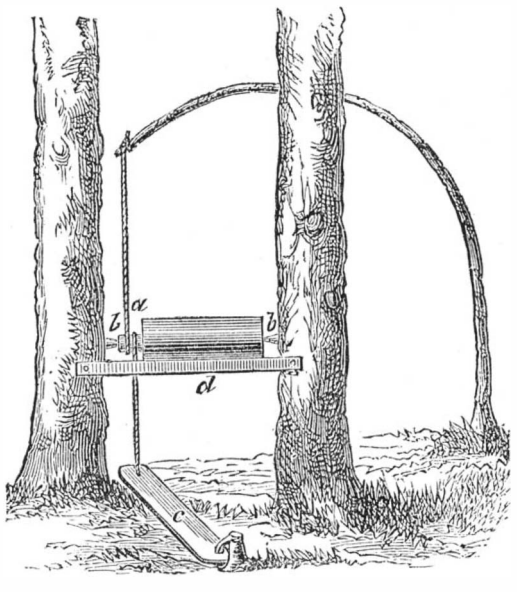

is worth noticing, seeing that it has been employed unaltered since times immemorial. If a Hucule wants to manufacture a turned basin, bottle, etc., he arms himself with a chisel, a hatchet, and a rope, and enters the dense forest which surrounds all human habitations in his part of the country. After having cut the tree out of which he wants to manufacture the desired articles, he looks around for two trees of about one foot or two feet diameter, and sufficiently close together for his purpose. But it is an essential point in selecting these trees that a young maple or beech should also grow near at hand. Having found this necessary combination for the work to be done, the Hucule makes two holes at a proper hight in the two trees, and inserts in these opposite holes maple cones, serving as dead centers. One of these cones is fixed, and the other removable.

In the annexed sketch of this arrangement, taken from *Engineering*, these cones are marked *b b*. The wood blank to be turned is then prepared with the hatchet, so as to be fixed between the centers, and is fitted at one end with a small cylindrical part, *a*, to take up the rope for giving a rotary movement to the piece of work.

The rope is then taken two or three times round the small cylindrical part, *a*, and is attached to the top of the young maple, as shown in the sketch. The lower end of the rope is fastened to a piece of wood, *c*, which, at its other end, is attached to one of the roots of the trees, and thus serves as a footboard. After this the man fastens a crossbar, *d*, to the trees, and begins to turn with his chisel whatever he wants to produce.

Statistics of Paper Manufacture.

From the time when paper made from cotton was first brought to Europe from the deserts of Central Asia, its manufacture has increased steadily and has entirely supplanted the papyrus of the ancients. Paper is now manufactured from the most varied materials, such as wool, cotton, flax, hemp, jute, agave, straw, potato, mulberry, esparto, and rice fibers; and a recent Austrian investigator, Dr. Albinus Rudel, calculates the yearly production in all civilized parts of the world as amounting to 1,800,000,000 pounds. This quantity is manufactured in 3,960 factories, which employ 90,000 male and 180,000 female hands, besides 100,000 workmen occupied in collecting and assorting rags. The factories, when in full working order, represent a money value of not less than $280,000,000 gold, and the value of the annual paper production is estimated at $195,000,000 gold. The production of the United States, with a population of 39,000,000, reaches up to 374,000,000 pounds, but their consumption exceeds this quantity by 3,000,000 pounds, which are supplied by importation. Every American uses annually 10¼ pounds paper, while Mexico, with Central America, consumes only 2 pounds, and British America 5½ pounds per head. The consumption in European countries is 11½ pounds per head in Great Britain, 8 in Germany, 7½ in France, 3½ in Austria and in Italy, 1½ in Spain, and in Russia but 1 pound. But these figures by no means justify us in drawing any rigid conclusions as to the literary occupations or mental acquirements of the respective countries, though they give us a general idea thereof. It must be remembered that one third of all this immense quantity of paper consists of paper hangings, pasteboards, shavings, and wrapping sheets, one half of all the production is printing paper, and the remaining sixth is writing paper. The consumption in civilized countries averages per head 5 pounds paper, 5 newspaper copies, and 10 letters; fifty years ago, 2½ pounds of paper were supposed to be the average. In round numbers, Dr. Rudel distributes the annual paper "crop" into the following departments: Government offices, 200,000,000 pounds; schools, 180,000,000 pounds; commerce, 240,000,000 pounds; industrial manufactures, 180,000,000 pounds; private correspondence, 100,000,000 pounds; printing, 900,000,000 pounds; total, 1,800,000,000.

A people consuming comparatively large quantities of paper will certainly occupy a high place in the scale of industrial and mental development, its use being co-extensive with commerce, manufactures, schools, and the printing press.

A VIRGINIA city (Nevada) man is said to have invented an ingenious plan of keeping his house clear of insurance agents and similar nuisances. On each side of the path leading to his door, he has fixed several sections of water pipe filled with small holes, and on the approach of a suspicious character a tap is turned, and instantly numerous jets of water enfilade the path in all directions, and effectually keep the invader at a safe distance.

AT various points on the river Thames, between Woolwich and Erith, there are visible at low water the remains of a submerged forest, over which the river now flows. This fact has led geologists to conclude that the present outlet of the Thames to the North Sea is of quite recent origin.

A. VOGEL has found nearly all specimens of fresh milk either neutral or slightly acid. In only two specimens, out of thirty, the alkaline action appears to have been due to traces of free ammonia. He ascribes the acid reaction of fresh milk to the presence of free carbonic acid, since litmus tincture colored red by fresh milk regains its blue color on shaking or boiling. No mention is made of the conditions of food, etc., to which the cows were subject.

© 1873 SCIENTIFIC AMERICAN, INC

CIRCULAR SHIPS.

The idea of circular vessels is not absolutely new. Probably the earliest practical suggestion was that of Mr. T. R. Timby, of Worcester, Mass., who, in 1843, filed in a working model of a revolving ship, together with specifications, in the Patent Office at Washington. His plan embraced circular ships and revolving ironclad forts and turrets, which have since come into use.

Admiral Popoff, of the Russian navy, has also adopted the idea, and quite recently two vessels, the Kiew and the Novogorod, have been successfully launched at Nikolaief.

We lay before our readers, in the accompanying engravings, sectional and plan views of these curious ships, from the pages of *La Nature*. Each vessel is 99·2 feet in diameter and constructed of iron, planked with wood and sheathed with copper. The draft of water is 12·1 feet, and the spar deck is 2·1 feet above the water line. The displacement is 2,783 tuns. The bottom is perfectly flat, and the sides are vertical, with an overhang aft, sheltering the rudder. In order to insure stability, twelve keels are affixed, each about three inches in depth.

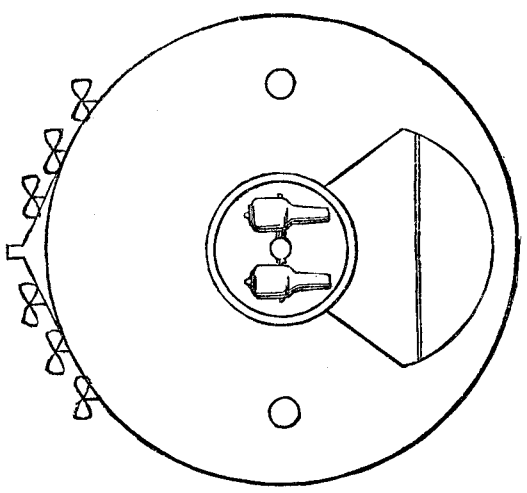

At the center of the ship is a turret, 29 feet 6 inches in diameter and 7 feet high, containing two 11 tun steel guns (probably eight inch bores), breech loading and mounted *en barbette*. The turret has a hollow axis which serves as an ammunition scuttle, and on which pivot the supports of the guns, so that the latter can be pointed over an angle of from 30° to 35° with the fore and aft direction of the ship. The rest of the armament consists of torpedo arrangements.

The lower portion of the hull is double, and there is a space of about 2·9 feet between the shells. The lower plating is ·62 inch in thickness and the upper ·23 inch. The hold is divided into a large number of watertight compartments. Parallel to the upper deck and about 6 feet below, is a second deck, both being united to the lower shell by bulkheads.



Forward of the turret is a light superstructure serving as a protection against the sea and as quarters for captain and other officers, eleven persons in all. The second deck comprises a forecastle for the crew of ninety men, and furthest aft the coal bunkers and boilers, each of the latter having a separate smoke stack. Amidships are other officers' quarters and a powder scuttle. There are six eighty horse power engines, built on the Woolf system, each driving an independent screw. Machines and boilers together cost $222,000, about. Below the forecastle are storerooms; and under the officers' quarters, the powder magazine and shot lockers. Two steering wheels are also on the second deck.

The armor consists of two streaks of plating about three feet broad: the upper layer is 9·1 inches thick, and is backed by solid teak 6 inches through; the lower skin is 6 inches, with a backing of 9 inches. The turret is similarly constructed, with the exception of the plates having a uniform thickness of 9 inches. At a distance of about two feet inside the walls of the ship is a watertight bulkhead formed by ·7 inch plating, dividing the battery into two parts, so that in case water should enter one of the exterior compartments, the vessel would still float.

The trial trip of the *Novogorod* was recently made at Nikolaief in presence of the Grand Duke Constantine of Russia. Although the ship was hardly completed, or entirely ready for sea, it is stated that, with a steam pressure of 5·2 pounds, and a vacuum of 21·4 inches, with 62 revolutions, a speed of six knots per hour was obtained. The ship proved herself an excellent sea boat, obeying her helm readily, and turning almost squarely on her heel when the engines on either side were stopped or their speed slackened. With the port engines going ahead and the starboard engines backing, it is stated that she went about the first time in two



minutes, and on a second trial in one minute and nineteen seconds, without hardly changing her place. On reversing both machines, the ship stopped in a few seconds and turned in the opposite direction, also without altering her position.

Correspondence.

The Hair Worm.

To the Editor of the Scientific American:

The following, apparently cut from some book, was sent to me for solution: and, if agreeable to you, I will answer it through your columns. It reads thus:

"A CURIOSITY FOR NATURALISTS TO SOLVE.—Mr. J. H. Horsford writes us from Freedom, Ill., that a horse, owned in that country by a Mr. West, has a worm or snake in his left eye, from two to two and a half inches long, and, to appearance, of the thickness of a small oat straw, squirming with the active motion of a large snake. The horse, he says, has evidently lost the sight of his eye from his snake-ship having taken up his abode there; and it is only about a week since there appeared any difficulty to the eye. He thinks it has been produced by a hair getting in by some means, and changed to a snake, as hairs are known to do in water. To know its wonders is to see it, as it can be plainly, a rod from the object, wriggling about as if too much confined. *Query:* How came it there and what will the result be? Let some of our veterinarians answer."

I hoped that the old notion that a horse hair will turn into a snake had been obliterated years ago. I am surprised that any one should advance such a theory, even in this Darwinian age.

The hair snake, so called, is frequently met with; I have taken them from grasshoppers, from an apple, from a head of cabbage, swimming in the gutter along the curb of our city. I have found them in our streams and in our spring water, of various lengths and shades of color. Indeed, it seems to me, everybody ought to be familiar with the *gordius*, or hair worm, which, in my youth (as I was taught the common notion), I thought was a transformed horse hair. They are so perfectly hair-like in form that it is not very surprising that ignorant persons might so mistake them. Yet the two sexes are readily distinguished. In the male, the tail end is bifurcated, in the female trifurcated (at least in the American species). I have found the female coiled or indeed knotted up, suggestive of the Gordian knot. Could its name be derived from Gordius, king of Phrygia? If so, I am not aware that I ever met with the statement. After carefully unfolding, I discovered that it had within its folds a string of eggs, like beads, in a bail, and seemed tenaciously attached to them, gathering them up carefully, again to take them under protection. The female deposits millions of these eggs, connected in a string. These, in the course of three weeks, hatch; when the embryos escape from the eggs, they are of a totally different form and construction from the parents. Their bodies are only the $\frac{1}{450}$th of an inch long and consist of two portions: the posterior cylindrical, slightly dialated and rounded at the free extremity, where it is furnished with two short spines; and the anterior broader, cylindrical, and annulated, having the mouth furnished with two circlets of protractile *tentaculæ* and a club-shaped proboscis. I am indebted for some of these details to the patient investigation of Mr. Joseph Leidy, M.D., of Philadelphia. He also says: "No one has yet been able to trace the animal to its origin, or what becomes of the embryo in its normal cyclical course," as those he had observed always died a few days after escaping from the egg. These *gordii*, when developed, vary in their length from three inches to a foot; they occupy various positions among the viscera and even in the head, including the muscles, for their living habitation, analogous to the *trichinæ*. And so minute a larva can as well get into the eye of a horse as into the muscles of an insect or animal.

Among the known *entozoa* that infest man is the *monostomum lentis*, of Gescheidt, found in the crystaline lens, and the *distomum oculi humani*, in the capsule of the crystaline lens, others of this latter genus, *d. hæmatobium*, in the tortal vein, and *d. heterophyes*, of Siebold, in the small intestines. To refer to the snake in the horse's eye, then. It is simply this: The minute animal just hatched (the *gordius* is common in streams, where horses may drink or be washe in the water abounding with the minute embryos of the hair worm) could cling to and penetrate the crystaline lens of the eye, and develope into the *gordius*, which may require some living tissues for its development, or if more carefully examined, might prove some other specimen of the entozoa.

I was more astonished to find a *gordius* in an apple; true, it was worm eaten, but I can advance no theory how it got there unless it crept from a dead grasshopper into the apple or hatched in the blossom and developed with the fruit. A shower of rain could easily scatter the eggs or minute embryos.

J. STAUFFER.

Lancaster, Pa.

The Variable Star Algol.

To the Editor of the Scientific American:

The periodical fluctuations in the light of the star Algol have been accounted for in two different ways, first, by supposing that a non-luminous body revolves around this star, the plane of its orbit being directed toward our system, or nearly so, and secondly, on the hypothesis that Algol is a secondary body, revolving round a dark primary in an orbit situated as in the former case.

If the variations are really produced by the intervention of a dark body, and if, at the time of minimum brightness, their dark body is entirely projected upon the disk of Algol, it is evident, from the large proportion of light cut off, that the two bodies do not differ very greatly in size. It seems to me, therefore, that if we admit the existence of a dark companion, it would be more correct to say that both bodies revolve around the center of gravity between them, rather than to say that either of the two revolves around the other.

There is a method of observation at our command, however, by which the truth of this theory of Algol's motion in an orbit, may be put to the test. I refer to spectroscopic observation. In case Algol moves in such an orbit, it is obvious that, at times, it must be approaching our system, and at other times receding from it.

If, therefore, the orbital velocity of the star be sufficiently great, displacement of the lines in its spectrum would result; and by observing the amount of their displacement at different times during the period of variation, the rate at which the star moves in its orbit could be determined, approximately. Of course, in these observations account would have to be taken both of the proper motion of the system from or towards us, and of the orbital motion of the earth.

Spectroscopic observations of Algol, and of other variable stars as well, if conducted in this manner, would, in all probability, lead to the most interesting results.

St. Catharine's, Ontario, Can. J. M. BARR.

Mexican Water Coolers and Filters.

To the Editor of the Scientific American:

In your issue of June 14, you have given a drawing of an Australian water cooler. That is very good for the purpose; but herein you will find a sketch of those used in this country to stand on a table, which are far prettier and more convenient. They are made of red, white, or buff colored clay, with saucers and stopples to match. Many of them are ornamented with wreaths of ivy, or bouquets of flowers in colors. The necks, stopples, and saucers, are glazed; the bodies are left porous. The white and buff become discolored sooner than the red. The latter are very pretty when made of the finest clay.

In this country there is a stone which is used for filtering water for domestic use, and I am sure that it is better than anything gotten up in the United States for that purpose. It is indurated volcanic ashes. The stone is cut in the form of a hollow, inverted pyramid, the smallest size being about 15 inches at the base, 22 inches deep outside, and 2 inches in thickness, the last dimension increasing as it approaches the apex, with the exception of being cut away near the base on the outer surface to form an offset by which it is suspended in a frame. Beneath this, upon a shelf in the lower part of the frame, six or eight inches from the floor, is placed a very thin, unglazed, earthen jar to receive the water as it drops from the stone. This jar is covered with a plate having a hole in the center, upon which rests a small, unglazed pitcher.

Turbid water passes from the filter as clear as crystal, remains in the jar deliciously cool, and is much more wholesome than ice water. The latter article is rarely used here, as our only sources for the supply of ice in this valley are artificial, and the peak of Popocatepetl. S. E. G.

City of Mexico.

Taking up the Wear of Journal Boxes.

To the Editor of the Scientific American:

In Mr. Crawford's suggestion, published in your issue of September 6, I see no way to take up the wear of the boxes, caused by the end strain that the rod is subjected to. I herewith send to you a sketch of a plan for which I am indebted to Mr. Charles Elms, of Chicago. I have used it, and find it a very convenient, cheap and substantial method of fitting up stub ends, answering all purposes of the strap, gibs, and key, and in some respects better to those, as there are no spring straps and battered keys to repair after a few years' use. The following is a description of the invention: A is the stub end; B, plate or cap fastened at each end by a stud, an offset fitting a corresponding one upon stub end A; C C are brasses; D is a steel wedge to take up wear of boxes or brasses, adjusted by the stub set screw, E.



Having been benefited myself by many suggestions and much information received from your valuable paper, I submit this to you, hoping that it will be of some use to my fellow draftsmen and machinists.

New York city. ROBERT C. GRAY.

Planetary Motion.

To the Editor of the Scientific American:

I claim that the following is no mere hypothesis, but a logical deduction from known facts: The sun and earth

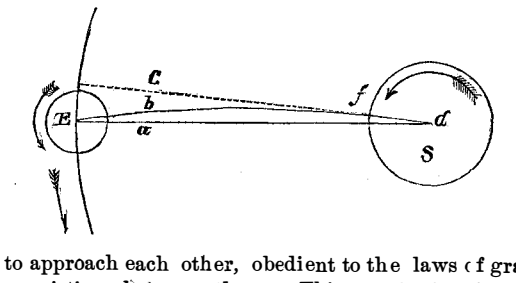

tend to approach each other, obedient to the laws of gravitation existing between them. This gravitating force is

© 1873 SCIENTIFIC AMERICAN, INC

instantaneous, and its direction is indicated by a right line drawn through the centers of the earth and sun. If it were not for an opposing force, they would approach each other with an accelerated velocity. Such a force exists in and is radiated from the sun in all directions, and is made manifest to us by certain well known physical phenomena.

This force is not instantaneous, but it requires time to act through space. The sun revolves upon its axis: consequently the direction of a force radiating from the sun and requiring time to act through space would not be indicated by a right line. For convenience of illustration, we will suppose that the planes of the earth's and sun's equators coincide. Let S and E, respectively, represent equatorial sections of the earth and sun: then *a* will be the line of direction of their attractive forces. If the sun be at rest, the direction of force emanating from the point, *f*, on the sun's equator would be indicated by the dotted line, *c;* but, as the sun revolves, this force, which requires time to act through space, will be deflected in the direction of the curved line, *b*. This line, *b*, is the center of direction of the force projected from the sun and acting in oppositon to the attractive force. I should have said that the arc of the sun's equator, intercepted by the angle, *a d c*, is equal to the distance traversed by a point on the sun's equator during the time required for the transmission of this force to the earth. This curve will be increased by the amount of the earth's orbital motion for a like interval of time. Now with your knowledge of mechanics, you will see at a glance the inevitable consequences of this slight difference in direction of these two opposing forces. Slight as it is, it is more than sufficient to account for the movement of the planets, as it will explain other questions. Now lay down an axial section of the sun and project the curves caused by the centrifugal force: the axis and equator will be represented by right lines: but from the intermediate degrees all the lines will be deflected towards the equator, the curves shortening as we leave the axis. In this we have an explanation of the cause of the planets being confined to the zodiac. I have forwarded substantially the same communication to three eminent astronomers. JOHN LINTON.

Baltimore, Md.

REMARKS BY THE EDITOR.—The nebular hypothesis finds general acceptation at present. The solar system is supposed to have been originally a nebula or vapor cloud of unequal density. Such a mass, in condensing by the mutual attraction of its particles, would rotate with increasing velocity. Rings of vapor thrown off, or rather left behind in condensation, formed the planets. The planetary nebulæ themselves throw off rings, forming their satellites and, in the case of Saturn, a multitude of asteroids. As force is as indestructible as matter, and as light, heat, motion, electricity and chemical action are convertible terms, the planets, resisted by the ether of space, will fall to the sun, and the solar system will ultimately resume its original gaseous form.

A sphere of oil, supported in a mixture of alcohol and water of the same density, and set whirling by introducing a rotating disk near its equator, flattens at the poles and throws off rings which form revolving satellites, in a very instructive manner.

The Proper Length of Crank Pins.

To the Editor of the Scientific American:

In your issue of September 27, I find just the thing I have been looking for for years, namely the proper rule for the size of a crank pin of an engine, as laid down by Theron Skeels, C. E. I think the rule beautiful in the extreme, and so simple that any one ought to understand it. Yet there are one or two things that are not fully clear to me, but this is probably from a lack of education on my part. The last part of his rule says "multiplied by a coefficient which is determined by an experiment." If we are to find out, by experiment, this point, why not the whole thing?

It seems to me that there may be more causes than the one named. In practice, we first look to see if the box is not too tight, and second, if the pin is in line with the main bearing. Then we see that the cross head does not twist this connection on the pin, next that it is well lubricated, and that the oil or lubricant is strong enough to stand the work. After going through the whole of these and finding all right, then we look to see if it be of proper size, and this, I opine, is and always will be determined by experiment, for engines of equal indicated horse power will need different sized pins.

We have one engine running made by George H. Corliss, with cylinder 18 × 30 inches, shaft 8½ inches diameter, crank pin 4½ inches diameter, and 7 inches long. This runs, with steam at 125 lbs. at 100 revolutions per minute and comes to full stroke probably 500 times per day, then off to nothing, passing many strokes without steam at all. After two years, use, there is no appreciable wear and no heating. We are making another like it, thus using the last part of Mr. Skeels formula and not infringing his rights by using the first.

Syracuse, N. Y. W. A. SWEET.

NEAR Delaware Water Gap, Pa., there is a cave in the face of Mount Minsi, opposite the river, whence issues constantly, with considerable force, a current of cold air. A small stream of water issues from the cave. It has been ascertained that the water trickles down from the roof of the cave, and the cooling of the air is supposed to be due to contact with the wet surface of the roof.

AN advertisement in the special sixty thousand edition of this paper, soon to be published, will reach a class of persons not accessible through the ordinary channels of newspaper advertising. See announcement on another page.

The Great Oil Wells of the United States.

The committee sent by the prophet Moses to enquire into the resources of Canaan, reported that it was a land flowing with milk and honey. But even if that ancient country had been veritably blessed with natural deposits of the substances mentioned, it is questionable whether its richness could have equaled the wealth which this country enjoys in her natural oil wells.

The total oil product is now 34,560 barrels of 42 gallons each, every day.

The number of producing wells in the entire oil region of Pennsylvania is about 5,000, and the average daily product per well is 7 barrels.

A correspondent of the New York *Tribune* gives the following interesting information:

BOUNDARIES OF THE OIL DIGGINGS.

The northern extremity or rather the two northern extremities of the oil producing region are in the vicinity of Titusville and Tidioute, Pa., from which points it extends in a southwesterly direction along the Allegheny River, though not following its course strictly, down to Greece City and Millerstown, a distance in a straight line of about eighty miles. The "Old District" begins at the north, as given above, and ends at Parker's Landing, on the Allegheny River, and comprises most of the old famous wells, including those of Pithole, which have figured so conspicuously in times gone by. The "New District" begins at Parker's Landing and extends down to and includes the new wells of Modoc. The entire district is a rough farming country, and is traversed with lines of hills which, though not remarkable for hight, are of mountainous character. Here and there are towns which, though of moderate size, are "cities," those of Titusville and Franklin being the finest.

THEORY OF THE OIL ROCKS.

The present accepted theory in regard to oil-producing rocks is that they lie in series of belts, the general trend of which is from twenty-two to twenty-three degrees east of north and west of south. But there are minor belts that seem to run across the great belts, and even the most experienced oil men are not very certain of the accuracy of their theories. One who has never visited this country is apt to fall into the error of supposing that the number of wells that have been sunk is quite limited; but the fact is that they may be numbered by thousands. They are seen everywhere, on hill and mountain, in valley, in mid river, in town and in country. And as most of these wells have gone to decay, and but very few are yielding enough oil to pay, and as it cost originally from $5,000 to $10,000 to drill each of them, some estimate may be arrived at of the amount of capital that has been dissipated.

HOW OIL WELLS ARE SUNK.

The business of drilling wells has now fallen almost entirely into the hands of professional drillers. When a man or a company has decided upon a well, and selected its site, the first step taken is to put up a derrick, or, as it is termed here, a "carpenter's rig." This is a framework, made mostly of plank, from 65 to 75 feet high, about 14 feet square at the bottom, and running nearly to a point at the top. The cost of a derrick is about $800. The tools used in drilling are the bit, which is like any ordinary rock drill, but larger, being about three feet in length; above that is the auger stem; then two chain links called the "jars," and above that the "sinker bar." This is attached at the upper end to the rope which passes over a pulley at the top of the derrick, and thence down to a large windlass outside of the derrick. The drilling is done by a steam engine with a crank movement, which keeps the drill at work day and night, a man standing by in the derrick to give the tools more rope at proper intervals, and to turn the drill while it is operating. After the drill has reduced a certain quantity of rock to sand, it is drawn from the well up into the derrick, and the sand pump is lowered and the sand is brought out, when the drill is again inserted. The rope used must be of the very best quality, and in digging deep wells it requires two ropes, as the sand very soon cuts them out. The expense is a very considerable one, being $400 for each rope. The tools for drilling that are now used weigh 1,800 pounds, those that were first used weighing only 90 pounds. A good set of drillers will put a well down in about 65 working days, provided they have good luck and no accidents; but it oftentimes takes six months to reach the oil sand.

ENORMOUS DEPTH OF THE NEW WELLS.

The rock in which the oil is found has a very decided dip from the north to the south, it being about sixteen feet to the mile. In the old or northern part, it is found at a depth of from four to seven hundred feet, whereas the new wells at Modoc are from fourteen to seventeen hundred feet deep, the expense of drilling one of the new wells being nearly double that of one of the old ones. The drillers generally know where they are by the kind of sand that they bring out.

CHARACTER OF THE SEVERAL ROCKS.

At Modoc, at a depth of about five hundred feet, they strike what is called the mountain sand rock, down to which they bore an eight inch hole. Here they know that they are below all fresh water, and they put in a casing, down to and resting on that rock, with an inside diameter of 5⅛ inches. From there they bore, through the casing, the remainder of the well with a diameter of 5¼ inches, depending upon this shoulder of rock at the bottom of the casing to shut off the salt water, which is sometimes found in large quantities. The next sand rock of importance that is found is called the second sand, which lies at a depth of a little over twelve hundred feet and sometimes produces oil. This, however, is not considered a good sign, and makes future drilling operations on the same well rather gloomy work, as a first class well cannot be expected. The fifty foot sand rock comes next; the next is the bowlder; then comes the corn meal sand, so called because of its resemblance to corn meal. From that you get five to ten feet of slate, and then you strike the oil sand, which is a sort of pebbly rock; and if the well is going to amount to anything, oil appears the moment you penetrate or even scratch this rock. Between these strata that I have mentioned, the space is filled up mostly with shells, slate, soap rock, sand, etc., the drilling being very easy. But in the sand rocks above enumerated, slow time is made by the drillers; and the mountain sand is so hard that it wears the drill, and the particles of steel from the bit are very perceptible among the grains of sand.

THE NEW WELLS AT MODOC.

The stream of oil from a flowing well is not continuous, but comes in pulsations, with occasional intermissions of entire stoppage of greater or less length. A good flowing well runs at first with great force, and the yield of oil is accordingly great, but it gradually decreases in production until it ceases to flow at all, and thus it must be pumped, after which the supply goes on decreasing until its yield will not pay the expense of pumping, and then it is shut down. It therefore requires ordinarily the constant drilling of 400 wells to hold the production up to the level of the demand. But at the present time all drilling must stop except in the neighborhood of Modoc, because nothing less than a 200 barrel well will pay back to the owner the first cost, $8,000 to $10,000, with oil at the present prices, 80 cents per barrel at the wells. Wells that will yield 200 barrels a day are found only at long intervals, Modoc being at present the exception to this rule, and the richest oil deposit yet discovered in Pennsylvania.

The first well that was sunk at Modoc was the Troutman well, which was struck last March. At first it averaged about 950 barrels a day, and it turned the attention of oil men in that direction. It, however, stood alone for over four months before any other wells were finished. Its present yield is about 300 barrels a day, and it is considered as holding out remarkably well. In July a number of other wells were struck, among which two of the richest were the Walt Thompson and the Dean & Taylor wells. Their yield is now estimated at 650 barrels each per day. There are at this place 16 wells, all lying within a square mile, which now average 500 barrels each every twenty-four hours. The reports that the new oil wells of Modoc are materially falling off are not correct. It is the opinion of good experts that the yield of oil is even greater than it is reported to be by the producers themselves. I saw wells that were said to be giving 500 or 600 barrels a day which had every appearance of yielding 1,000 barrels a day. As a large number of new wells are being drilled in this deposit, the producers, being anxious to keep the price of oil as high as they can, are evidently underestimating the capacity of their wells.

PRODUCTS OF THE VARIOUS DISTRICTS.

Of the 34,560 barrels of oil now daily obtained, the First District, which is the latest development and includes all the big wells, furnishes 18,560 barrels, the Second District 2,500 barrels, the Third District 4,500 barrels, and all the other districts, containing the wells that furnished all the oil previous to 1870, 9,000 barrels, making a total as above stated of 34,560.

THE PIPE COMPANIES.

As is well known, all the oil is delivered from the wells to the delivery tanks on the railroads through pipes. These pipes are laid generally upon the surface, and they run through valley and over mountain, and under rivers, the oil being forced through them by steam power. The longest pipe now in use is about 15 miles in length.

The Bridgeport Shirt Factory.---The Howe Sewing Machine Works.

A correspondent in the *Commercial Advertiser* gives the following interesting account of his visit to some of the extensive manufacturing establishments in Bridgeport, Conn:

Burlock & Co., large shirt manufacturers, the writer states, employ about six hundred hands, and make one hundred dozen shirts per day, consuming three thousand yards of muslin and seven hundred of linen each day, and $9,000 worth of thread every year. One hundred sewing machines are constantly running, from seven o'clock in the morning until eight in the evening. These machines are worked by steam and managed by young girls, the majority of whom are skilled performers; some of these experienced hands earn as high as $75 per month. Every part of a shirt is manipulated by different hands; each piece is finished in a room designed for the kind of work. It takes sixty women to make all the parts of a shirt, and yet it only requires two minutes to make this all important garment. From the time the cloth is first brought into the cutting room, there is no rest for the fabric; it is tossed about with lighting speed; the changes made from one to another are really marvelous, and, before you get over your surprise, the shirt is ready for the laundry, where it again flies about without stopping until it reaches the inspecting room, where it is allowed to rest a few minutes, when it is carefully looked over, and, if there is the slightest flaw found anywhere in its manipulation, back it goes to the department where the defect was made. We remained some time in the ironing room, and were much amused to see the way the women ironed the bosoms, collars, and cuffs. The irons are heated almost to a red heat; they

© 1873 SCIENTIFIC AMERICAN, INC

are passed over the linen with very great rapidity, which is no sooner dried, than the ironer again wets the linen and takes another red hot iron. This drying and wetting process is repeated several times before the linen presents the desired glossy appearance. We asked Mr. Perkins what the secret was of putting on this much admired polish. The gentleman smiled, and said: "It is nothing but elbow grease."

After seeing how much labor and scientific work it takes to make a shirt, we drove over to East Bridgeport, and were escorted through Howe's sewing machine factory. This building has a front of 1,256 feet; it is five stories high, and employs 1,500 workmen. They make 500 hundred machines per day. Every part of a sewing machine is a branch of work by itself, and is manipulated in a separate room under the charge of a foreman. We were very much interested in the needle department, which is under the charge of Mr. Thompson, a very pleasant and affable gentleman, who kindly gave us many points of information. Twenty thousand needles are manufactured in one day. One hundred and eighty men and woman are employed in this department. From the wire steel coil up to the time when the needle is ready for use, it passes through fifty different hands.

LETTER FROM UNITED STATES COMMISSIONER PROFESSOR R. H. THURSTON.

NUMBER 16.

PARIS, September, 1873.

Since the date of the previous letter, we have made an excursion into South France, visiting the immense iron works of Le Creusot, and the great and busy city of Lyons. Our trip has occupied only four days, but we have seen and learned a great deal and have experienced much pleasure in that short period.

During the year 1872, the total quantity of cast iron produced in France is reported as 1,181,262 tuns, of which more than one million tuns has been produced by the 113 blast furnaces which use coke fuel, and 178,571 tuns were the product of 115 furnaces using charcoal. The production of steel is given as about 140,000 tuns during the same year, the amount having doubled in the short space of three and a half years, and nearly trebled in about four years. This production is the result of the united labor of many establishments; but a single one, that of Le Creusot, is sending into market one third of the whole, and we should hardly have been justified in leaving France without visiting this place, even had it compelled far greater expenditure of time, money, and physical energy than it has demanded. We were also bound by our acceptance of the courteous invitation of its hospitable proprietor, M. Schneider, whom we had met as a colleague at Vienna.

The day before leaving Paris on this expedition, we visited the locomotive engine building establishment of

CAIL & CO.

on the Quai de Grenelle, near the Champ de Mars. We found there a fine collection of shops, employing between three and four thousand men in the manufacture of locomotives and of general work. We were received here with the utmost kindness and courtesy, as we have been at all of the great manufactories that we have desired to visit, with the single marked exception of that of Krupp, at Essen. The workshops of Cail & Co. cover an immense extent of ground just outside the city of Paris. They are all of one story in hight, the roofs are supported by iron columns and girders, and the interior is generally well lighted and ventilated by windows in the roof.

The transportation of material from one part to another of the works is effected by cars upon a railroad track leading to all the workshops, the traction power being obtained from several light locomotives. In the setting-up shops, traveling cranes are well placed, and are in constant use. The work is generally very good, although some pieces were hardly as well finished as was the average of that which had passed inspection, and it would not have been passed as satisfactory in our own leading shops. The boiler work was quite good. We noticed one riveting machine here, but it would not compare favorably with those that we have seen elsewhere. In the forge shop the work was good. The heaviest steam hammer was said to have a drop weighing 800 kilogrammes—1,760 pounds. Judging from the fact that there were a hundred draftsmen employed, we should conclude that work is not as well systematized as it should be in such a place, or as it is in our own establishments of this kind, and that alteration of designs must absorb a heavy percentage of the profits. It is possible that the variety of work done by Cail & Co., which includes sugar mill work and every variety of machinery, may be good cause for the employment of so much profit-consuming labor. We were pleased to find here a neat chemical laboratory, an auxiliary too seldom appreciated by iron works proprietors.

Taking the 11 A. M. train from Paris, an express running through to Marseilles, we enjoyed a very pleasant ride through the heart of France, arriving at Le Creusot at 9:30 P. M. Our route, almost from Paris to the end of our journey, lay through the beautiful and rich wine-growing districts, of which the produce is sent to all parts of the world. From Verrey to Dijon and Chagny, we were delighted with the beautiful scenery of the

CÔTES D'OR,

where are raised the finest wines of Burgundy, and which district is given its name from the exceptional value of the product of its vineyards. The common table wine of this country, which would, with us, be considered a good wine, sells for about twenty sous a bottle, while the price of the finer brands of the *Côtes d'Or* is ten francs here, and probably nearly as many dollars in New York, if it is possible to obtain them at all in all their native purity and strength. Both red and white wines are raised, but the red are generally most liked and are best known abroad. Their delicate and delicious flavor and their exquisite bouquet are considered, by connoisseurs, to be beyond rivalry.

The level lands of the valley through which the line of railroad passes, and the beautiful sunny hillsides on either hand, are covered, apparently, by one immense vineyard. This whole district, with an area of 250,000 acres, is devoted to wine culture, and the annual production has an estimated value of fifty or sixty millions of francs—ten or twelve millions of dollars.

We dined at Dijon, the name of which town is familiar to all as one of the places which obtained some celebrity during the late war. Here we met a veteran who had been partially disabled in a skirmish with the Prussians in 1871, and a bright young French student with whom we enjoyed a pleasant and instructive conversation until our change to the branch line leading to

LE CREUSOT.

Long before reaching the latter city, we could see, away across the country, great masses of smoke rising slowly from the valley and floating across the hills, like heavy thunder clouds, obscuring large tracts of the country which was elsewhere beautifully illuminated by the bright light of the moon, then just past the full. As we finally skirted the town and rushed toward the station, a sight burst into view such as we had never before witnessed, and to which no verbal description can do justice. The vast clouds of smoke which we had been watching, miles away, were issuing from the tops of myriads of chimneys and from the midst of numbers of great blast furnaces, which rose, like so many towers of Babel, far above the surrounding building The long structures, covering the rolling mills and the forges, were plainly seen through the gloom, lighted up by a ruddy glow from great masses of hot metal passing through the rolls, or by the brighter glare of scores of forge fires; and on the hill above and behind the works, barely revealed by the light of the partly obscured moon, we could see the populous town which has grown up here, founded and supported by this marvelous example of recent industrial progress. A dull intermitted roar of escaping steam, the loud clatter of gearing from the rolling mills, and the rumble of the rolls, with the unceasing concussions of many steam hammers, the sound of loud voices now and then rising above the noise of machinery, and the barking of the numerous dogs in the city beyond, mingled and produced almost as novel and exciting an impression upon the ear as did the strange and interesting scene upon the eye.

A frugal and truly French repast of bread and delicious native wine was furnished at the humble inn at which we stopped for the night; and we retired early, sleeping soundly in beds as clean and comfortable as we ever found at an English country tavern, or in our own New England. Before we had finished our breakfast, our kind friend, the proprietor of this wonderful establishment, who had already been informed of our arrival, called to take us in charge, and we spent the day in its exploration.

A century ago, this busy valley was a deserted and sparsely inhabited spot, forming part of one of the least productive estates in France. The discovery of its mineral wealth at that period was the commencement of its development, by the erection of an ironworks, in 1782, which was supplied with coal from the beds beneath it and with iron ore from the neighborhood. The machinery was driven by one of Watt's earliest engines, which is still preserved at Creusot as an interesting relic. The early prosperity of Creusot, then called Charbonnières, was seriously checked by the French revolution, and by the subsequent uncertainty in political matters; but, recovering, acquired such extent, when purchased in 1837 by MM. Schneider, that its value was fixed at 2,700,000 francs, and its production was stated at 40,000 tuns of coal and 6,000 tuns of iron. The number of workmen was not more than 1,200 to 1,500, and the population of Creusot was not much above 3,000. To-day we find 15,500 people employed in the mines and mills, two thirds of whom are engaged in the latter. The establishment produces 50,000 tuns of steel rails annually, and the new works, the construction of which is already begun, will, in a few months, largely increase this figure. Of iron rails, 20,000 tuns are turned out this year. A hundred locomotives and an immense quantity of other machinery are also included in the annual out-put of Creusot.

There are twelve blast furnaces making ordinary and Bessemer pig metal. The later furnaces are 20 meters—65 feet—high, while some of the older ones are 25 meters. The maximum efficiency seems to have been found at an altitude which has been found best also in some portions of our own country.

The Whitwell and the Cowper hot blast stoves have both been used here, and the new furnaces have a stove which M. Schneider calls a hybrid "Whitwell Cowper." The temperature of blast is carried at about 600° Centigrade=1,080° Fah. The fuel is coke, from native coal raised on the premises or at St. Etienne, where are mines which have the same ownership. The ores of the neighborhood make very good iron, but, for the Bessemer process, iron is made from ores imported from Africa. These ores are as pure and rich as the English Cumberland, and our best Missouri or Lake Superior ores.

Here we saw, for the first time, the molten iron tapped from the blast furnace into ladles, which were drawn at once to the converters and the iron converted into steel without intermediate casting, cooling, and reheating. The economy thus effected is an important item in these days of close competition, and, in part, accounts for the success of these inland ironworks in competing with English makers of steel and in exporting the rails produced here to the United States. It is a matter of wonder that this coöperation of the furnace with the converter is not oftener met with, since there is no difficulty in making the arrangement, as a matter of engineering, and there must be many localities where the requisite capital may be obtained to take advantage of the natural facilities existing for such an economical combination.

The steel rails made here contain four tenths per cent of carbon, and are as strong and tough, and as resilient, as any made in Europe. They are of Bessemer metal. Where a softer steel is required, the Siemens-Martin process is adopted. I think that it was at Le Creusot that this method was first made successful.

In the magnificent Creusot exhibit at Vienna were some fine samples of the product of this process, but we found the finest specimens here that we had ever seen. Such wonderfully ductile metal is precisely what is wanted to take the place of the weaker and less homogeneous metal, iron, for thousands of purposes. These samples were said to contain one fourth of one per cent carbon.

Eight new Siemens furnaces are in course of construction. The rolling mills are very large and are unusually well arranged. The buildings are neat and substantial and the machinery strong and well proportioned. The driving engines are not what we should, in the United States, consider the best possible design, but are well built and are strong and serviceable. The workshops contain much old machinery and some that is new and exceedingly creditable. The forge contains steam hammers of all sizes up to fifteen tuns weight of drop; and here, as well as in every other department, we saw evidence of good management and of intelligent supervision.

We visited the offices and drawing rooms, and found them well constructed, pleasant, and comfortable, with every possible facility for doing work and for communication with the various departments of the works. The telegraph is used very extensively for correspondence. Before leaving, we looked into the houses where the locomotives, used by the works for their own transportation, were kept. There are sixteen now in use, and they are not fully equal to the work. They are plain, powerful machines of the common continental type of freight engine, and exhibit no specially noticeable peculiarities.

The working people here seem to have a more efficient character and more industrious habits than is usual with French workmen, and impress the visitor very favorably by the contrast which they present to the sluggish, inactive, workmen generally seen in Europe.

After a very thorough examination of this greatest of all the French ironworks, after enjoying the generous hospitality of our host, and after a stroll about his pleasant grounds, we took the evening train for

LYONS.

We have not space in which to describe this fine city, or to give even the merest abstract of the memoranda gathered here in the great center of the silk manufactures, where 70,000 looms, in 10,000 establishments, support 140,000 persons, and produce a value of $60,000,000 per year. The permanent Industrial Exhibition, which was visited with the expectation of learning much that would prove of interest, is a sad failure, although it opened so short a time ago under such encouraging auspices. We saw there some fine castings, in Siemens-Martin steel, from the "*Société Anonyme de Charente*," and a six inch armor plate from Marvel Frères, doubled up without crack, as stated, *cold*. Chevalier & Grénier exhibit a compound portable engine and boiler with removable tubes and firebox, as at Vienna. The engine governor was of the parabolic class, and the whole was a good piece of work. The immense buildings look barnlike and empty, and we came away disappointed.

Before taking the train back to Paris, we visited the observatory on the hights of Fourvières, and spent an hour or more enjoying a splendid panorama embracing many miles of the valleys of the Rhone and the Saône, which have their confluence at Lyons, and, a hundred miles away, over the eastern hills, taking in the hazy outlines of Mont Blanc. Then, after an uneventful all night ride, we were back in Paris, ready to leave the continent and to spend a few days in Great Britain.

R. H. T.

THE ATLANTIC CABLES.—The attempt of the Great Eastern steamer to lift and repair the Atlantic ocean cable of 1868 has failed, owing to stormy weather, and the great ship has returned to England. The work is postponed until next year. The fault has been located at a point not far eastward of the banks of Newfoundland. The cable was successfully grappled and lifted several times. A portion of the original cable, that of 1858, was brought up during the grappling operation and found to be in a fair state of preservation.

THE Preece block system of electric railway signaling is worked on the principle that the trains are to be kept a certain unvarying distance apart. No train can advance until the signal is given that the line for the specific distance ahead is absolutely clear.

THE passengers carried by the railways of Great Britian in 1872 reached the enormous total of 423,000,000. The total number carried in 1850 was only 78,854,422. The increases is mainly owing to the construction of underground and other suburban lines leading out of the large cities.

© 1873 SCIENTIFIC AMERICAN, INC

AUTOMATIC CAR COUPLING.

The invention illustrated in our engravings is a new form of car coupling, which, while it connects the cars automatically as they are brought together, allows of the uncoupling of the vehicles from either their tops or sides. The device is claimed to operate perfectly on the sharpest curves and steepest grades, and to bring the cars as closely together as the ordinary drawheads now used. It is attached to the carriages in the usual manner, with perhaps somewhat more up-and-down and sideways play.

From Fig. 1 the construction will be readily perceived. A is the drawhead of one car, made with a cavity of sufficient size to receive the connecting drawhead, B. Fitting into a recess in A, so that its lower and hook shaped end may project down into the hollow portion, is a steel coupling block, C, which engages with another steel block, D, dovetailed and bolted to the drawhead, B. The block, C, is provided with a ring or handle at its upper portion to admit of its being readily lifted out by hand, when it is so desired, to uncouple the cars, while its movement is limited by a pin or screw, E, working in a suitable groove on its surface. When raised, the coupling block, C, may be held up by a pin placed in a hole therein and above the drawhead.

Pivoted in a slot in the upper part of the latter is a bent lever, F, of which the forward arm enters a slot in the coupling block, so that, by suitably operating the lever, said coupling block may be easily lifted up, and the cars thus uncoupled. This is effected by a chain, G, attached to the upright arm which, passing over suitable rollers, connects with one lever near the top of the car and with two other levers attached to the sides of the vehicle.

The draw bar, B, has a collar, H, to prevent its being forced too far into the opposite drawhead when the cars are brought together.

A point claimed as of considerable advantage in the invention is the facility with which it may be adapted to connect with and in the same manner as the common form of drawhead. In the forward part of the bumber, A, is a hole for a coupling pin which secures one end of the link. The other extremity of the latter slips over the coupling block, D, where it is held in place by a square angle bar, I. One portion of this bar drops into a square though somewhat inclined hole in the drawhead, B, at J, and its lower extremity, being notched, locks itself in. This will be more clearly understood from the section shown in Fig. 3. The horizontal portion of the bar, I, simply rests along the top of the drawhead, B, and terminates in an end angled to fit the corner of the block, D, thus securely confining the link.

Patented through the Scientific American Patent Agency, September 2, 1873. For further particulars regarding purchase of interest in the patent, etc., address the inventor, Mr. Franklin E. Howard, Geneseo, Livingston county, N. Y.

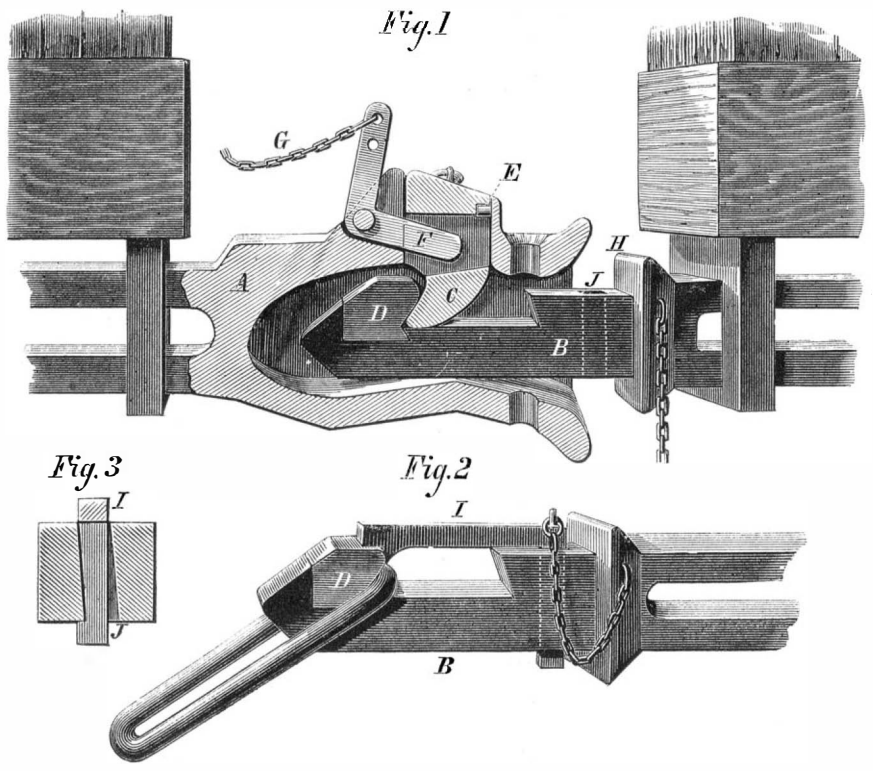

HOWARD'S AUTOMATIC CAR COUPLING.

CUMMINGS' IMPROVED MILL PICK.

The invention herewith illustrated is a small pick, designed for both furrowing and cracking, or for light and heavy stone dressing. The principal advantages are the firmness with which the blades are held, the manner of letting the same down, to compensate for wear, and also the facility with which they may be changed. The latter is an important feature, as it is often necessary to remove blades for sharpening as many as one or two hundred times in dressing a mill or a run of stones. Two sizes of the implement are made, one for furrowing and the other for cracking.

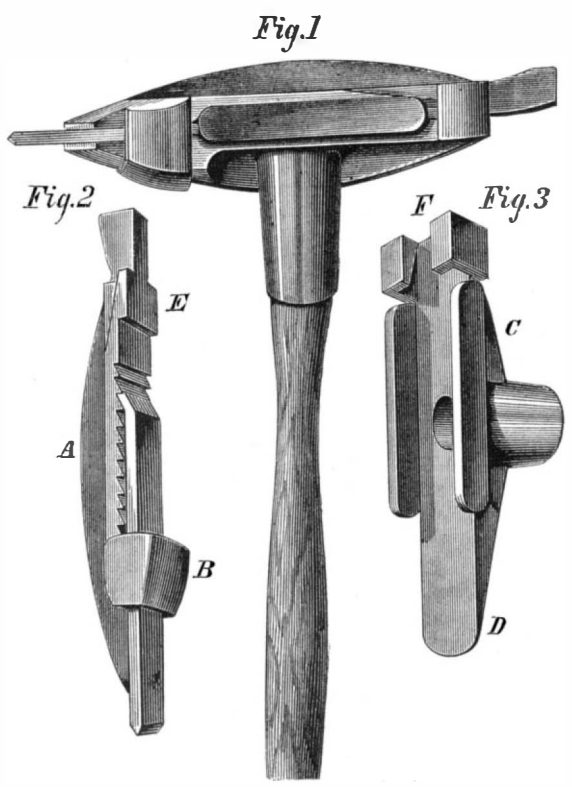

Fig. 1 represents the entire pick ready for use. Fig. 2 is a stationary stock bearing the handle, and Fig. 3 is a detachable clamp plate. The latter is a thin metal plate, having a ratchet on its inner surface, a convex rib, A, on its rear side, and a loop or socket, B. The pick or blade is a thin steel plate of even thickness, with its upper end bent to fit the notches in the clamp plate.

In adjusting for use, the blade is placed upon the clamp plate, its sloping end entering one of the notches, when both are applied to the stack, C. The lower wedge-shaped end, D, of the stock, enters the loop or socket, B, of the clamp plate, and the wedge-shaped lips, B, of the clamp plate fit into corresponding channels formed in the ears, F, of the stock. It will be seen that a blow upon the cutting edge of the blade will force the clamp plate and blade upward, and cause them to embrace the stock with great power. The more powerful the blows upon the stone, the more firmly, it is claimed, is the blade confined in its place. To remove the blade the implement is reversed, and the opposite end of the clamp plate struck on any solid substance, when both clamp plate and blade will be instantly released.

As the blades are abraded by use, they can be let down in the ratchet until worn out. They are tempered along the entire length, and only require grinding to sharpen.

Patented June 24, 1873, by Mr. Jotham Cummings, of West Charleston, Vt., by addressing whom further particulars regarding sale of rights, etc., may be obtained.

The Effects of Worry.

That the effects of worry are more to be dreaded than those of simple hard work is evident from noting the classes of persons who suffer most from the effects of mental overstrain. The casebook of the physician shows that it is the speculator, the betting man, the railway manager, the great merchant, the superintendent of large manufacturing or commercial works, who most frequently exhibits the symptoms of cerebral exhaustion. Mental cares accompanied with suppressed emotion, occupations liable to great vicissitudes of fortune, and those which involve the bearing on the mind of a multiplicity of intricate details, eventually break down the lives of the strongest. In estimating what may be called the staying powers of different minds under hard work, it is always necessary to take early training into account. A young man, cast suddenly into a position involving great care and responsibility, will break down in circumstances in which, had he been gradually habituated to the position, he would have performed its duties without difficulty. It is probably for this reason that the professional classes generally suffer less from the effects of overstrain than others. They have a long course of preliminary training, and their work comes on them by degrees; therefore when it does come in excessive quantity, it finds them prepared for it. Those, on the other hand, who suddenly vault into a position requiring severe mental toil, generally die before their time.—*Chambers' Journal.*

HAMILTON'S CONTINUOUS SELF-FEEDING PERMEATOR.

The object of the device herewith illustrated is to inject tallow, oil, or similar material, into the steam in an engine cylinder, and thus, by thoroughly permeating, to lubricate the vapor and, consequently, the machinery with which the same comes in contact. The invention is an ingenious application of the needle principle, the supply orifice being not over one thousandth of an inch in diameter, so that the lubricant is driven in, in the shape of fine mist or spray. Probably the most important advantage claimed is that the apparatus will continue to supply oil even after steam is shut off, as in cases of locomotives on down grades, etc. How this is effected will be noted as we progress, in the description which follows:

The chamber, A, and distributing bolt, B, Fig. 1, are cast in a single piece of any suitable metal. In the bolt are orifices through its wall, leading to the channels formed by the intermediate space between the needle, C, and its interior. At the end of the bolt is arranged a conical discharge orifice, in which is the steel pointed valve spindle or needle. The relative diameters of the needle and opening are such that, when the former is screwed down so as to shut off all further flow of the lubricant, its point projects beyond the hole and into the cylinder, so that the orifice is, by this means always kept free from incrustation. The needle spindle passes through a stuffing box, at D, and is rotated by the hand wheel shown. At E is a socket bearing, to which is secured, by means of a screw, a bearing plate for retaining the cup in proper position beside the steam chest or cylinder.

The oil is poured into the cone-shaped vessel, F, in the center of which is cast a vertical tube, E, shown in section in Fig. 2. The interior of the latter is threaded to receive the screw, H. In the bottom of the receptacle are made annular supply channels, I, and along said screw, H, is cut a groove, as shown, to serve as an air passage. The screw, H, forms a screw plug valve, and terminates in a hollow spindle, K. The surface of the female thread in tube, G, extends below the discharge orifices, I, of the supply chamber, and also below the inlet or escape openings of the air passages, so that each can be opened and closed at pleasure by simply turning the plug valve. The tube, L, of the sediment cock (Fig. 3) is screwed into an opening at the base of the chamber, and is formed, with a female thread, within a small valve chamber into which the oil flows through the short passage shown. The valve plug, M, is conical at its end, and has a passage, throughout its length, opening by branches into the valve chamber.

The apparatus being secured to the cylinder or steam chest, oil or other lubricant, is poured into the cup, the valve plug, H, being elevated to such a position as to leave the lower orifices of the channels, I, and air passages open. The air then will escape as the liquid flows in, a point of advantage, as it is claimed to give the engineer control over the cup, whether the engine is in motion or not, and with no risk of his getting scalded with boiling oil or tallow.

When the chamber, A, is filled, the plug, H, is screwed down, thus cutting off the supply. The needle spindle, C, in bolt, B, is then caused to open the orifice leading into the cylinder. The lubricant passes into the bolt, B, through the orifices in its walls, and is discharged, as before stated, in spray-like form. The steam also enters the chamber, A, through the same orifices, but, becoming condensed, falls to the bottom, and lifting the lighter lubricant, keeps the latter in condition readily to flow to the tubular section of the bolt, B. It is stated that when the cup is emptied the amount of oil drawn off is just equal to the capacity of the chamber, and that the lubricant must, consequently, be always above the bolt and in condition to be fed through the openings. The mere action of the valves, therefore, when steam is shut off from the cylinder, it is claimed, is sufficient to bring the oil away, so that the lubricant is supplied just when the facings become dry and cutting begins.

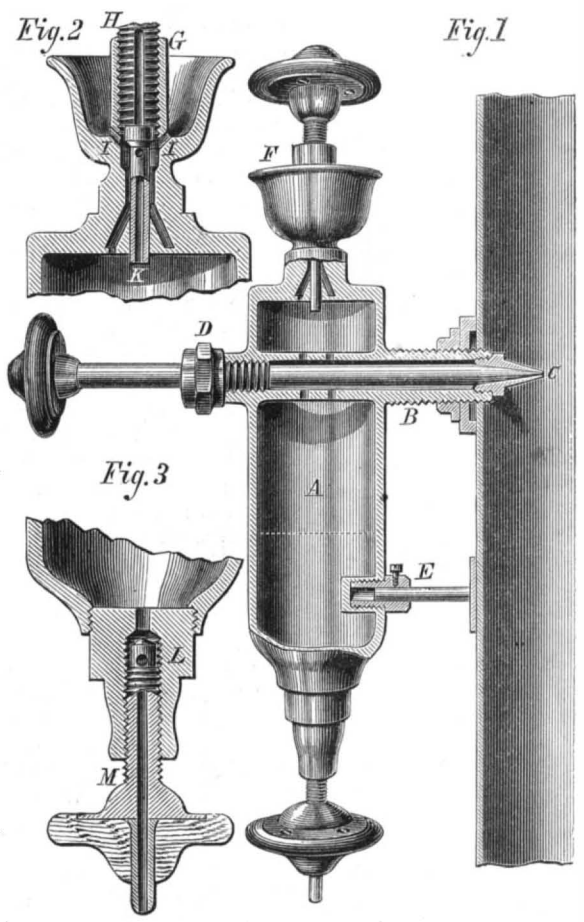

To draw off the contents, it is only necessary to turn the valve plug, M, and thus allow the sediment, etc., to escape through the opening through its center.

Patented June 24, 1873, to Mr. William Hamilton. For further information address William Hamilton & Co., Box 379, Erie Pa.

© 1873 SCIENTIFIC AMERICAN, INC

IMPROVED LUBRICATOR.

We illustrate in the accompanying engraving a new lubricating device, claimed to ensure a continuous and economical flow of oil or similar lubricating material into the cylinders of steam engines, and, besides, to possess many improvements and advantages in general construction.

The oil is poured into the cup, A, Fig. 1, and descends by the glass tube, B, into the circular receptacle shown. At C, the apparatus is attached to the cylinder, the steam from which, when the valve, D, is opened, passes up the tube, E. This tube is movable in the direction of its length and is held tightly in stuffing boxes, as indicated in the sectional view of its upper portion, Fig. 2. G is the condensing surface, so that the steam, emerging from the end of tube E, fills the intermediate space between said tube and the inner periphery of G with water. It is clear that, by moving tube E up or down so as to bring its upper end nearer or further from the cover of G, the condensing surface will be decreased or augmented so that less or more water will pass by pipe H, and mingle with the oil in the reservoir. The effect of this addition of water is to displace the oil, raising the latter back through glass tube B and pipe H into G, and thence down tube E into the cylinder at C. The glass tube, B, affords a convenient means for the engineer to perceive the amount of oil in the apparatus, and also to know when the water entirely displaces the lubricating material in the reservoir, a fact indicated by its appearance at the bottom of the tube. There is an opening in the lower part of the reservoir which communicates through pipe I and valve J with the bent conduit shown, thus allowing the contents to be drawn off at will. The valves at J and at A are provided with screw thread collars, which secure them in place and through which their stems freely work. This is designed to obviate the difficulty, which arises when the thread is on the valve stem, in screwing the plug down on its seat in case of any foreign material stopping the way. With the present arrangement, the collar is the securing portion, while the stem may be turned around so as to grind the valve into its seat.

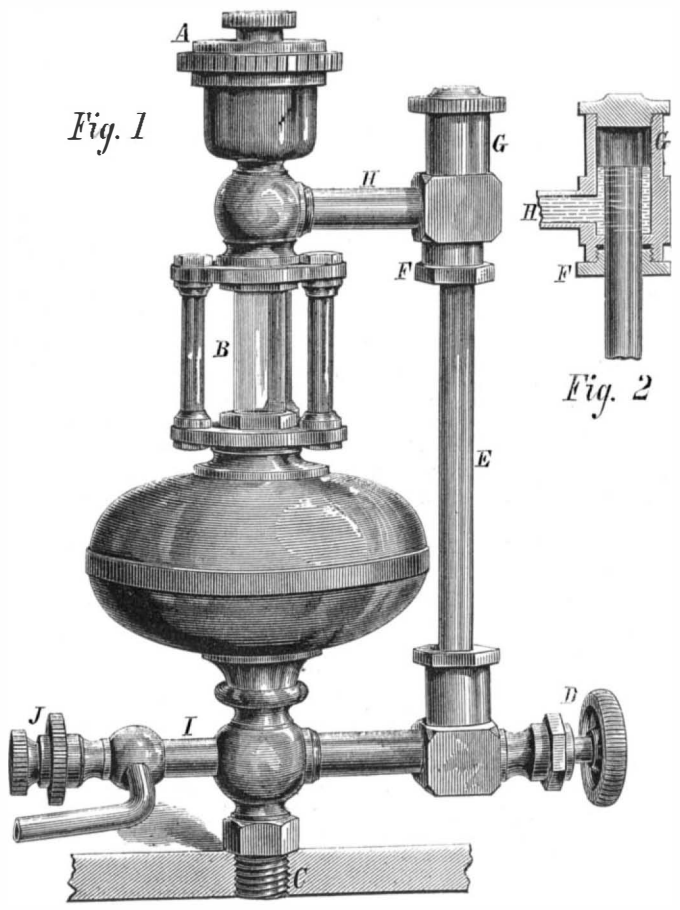

Fig. 1

Fig. 2

POWER'S IMPROVED LUBRICATOR.

The inventor informs us that he has had this device in use for some time past and has experienced uniform success. The flow is constant and unobstructed, while the expenditure of oil is reduced to a minimum. The construction is strong and durable, and the apparatus generally appears to us as showing considerable ingenuity as well as being well adapted for its purpose.

Patented through the Scientific American Patent Agency, January 7, 1873. For further particulars address the inventor, Mr. James McL. Power, Port Townsend, Washington Territory, or at Warren, Trumbull county, Ohio.

Testing Alcohol.

It is customary to obtain the percentage of absolute alcohol and water in mixtures of alcohol by taking the specific gravity with a hydrometer especially adapted to the purpose and called an alcoholometer. When a liquor contains sirups and extractive matters, the specific gravity fails to indicate the amount of alcohol present. In such cases it has been necessary to distil off the alcohol and then measure it.

In these cases, and also where no alcoholometer is at hand, or the quantity of the liquid is too small to float one, Vogel's method may be employed. He found that, when dry starch paper was dipped into a solution of iodine in alcohol of 66·8 per cent or over, the starch was not turned blue. If the spirits contained less than 66·8 per cent absolute alcohol, the paper is immediately blued. To apply the test to weaker alcohols, it is only necessary to add absolute alcohol until the reaction no longer takes place. From the quantity added it is easy to calculate the percentage. If the spirit tested is above 66·8, water is added from a graduated measure until the starch paper turns blue, and the percentage calculated from the quantity of water added. If potassium be thrown upon alcohol of specific gravity 0·830, it takes fire; but with spirits of specific gravity 0·823 and under, it will not take fire.

THE JAPANESE DEPARTMENT AT VIENNA.

Among the most interesting displays of Oriental productions at the Vienna Exposition is the Japanese department. Here are exhibited the choicest articles of workmanship, embracing those forms of art which, for ages, have satisfied the popular tastes of Japan, but which, under the rapidly improving ideas of her people, will soon for ever disappear. Remarkable sea monsters of grotesque form, birds, vases, globes, etc., having the appearance of solid materials, elaborately adorned, but in reality composed of paper, stretched and supported on bamboos, surprise and interest the visitor on every side. The display of Japanese trappings for horses, vehicles, saddles, bridles, and equestrian equipments is quite extensive and includes many peculiar forms. For example, instead of a stirrup like ours, the Japanese use a piece of wood bent at a sharp angle, to one end of which the stirrup strap is attached, while the foot rests on the portion below, which hangs horizontally. The stirrup is beautifully decorated. The wealthy Japanese, when they ride, present a gorgeous appearance, the animal being covered with gold-plated straps, bridles, and fringes, while the dress of the rider is adorned with golden emblems, and his belt filled with costly swords.

The show of Japanese arms is very fine, especially the collection of swords. These are of curious forms and elaborate workmanship, great pains being taken in the ornamentation of the hilts. The steel is of splendid quality.

In their mental power and readiness to appreciate the ideas and appliances of modern nations, the Japanese are decidedly in advance of other Eastern peoples; and now that the government is so fully committed to the re-education of the people, on the basis of Western civilization, the nation will soon take a high rank. Large numbers of Japanese young men, from the prominent families of the Empire, are now being educated in Europe and this country. At the Vienna Exposition a special delegation of Japanese students and officials are employed to copy and procure information about everything which they consider to be useful for introduction into Japan.

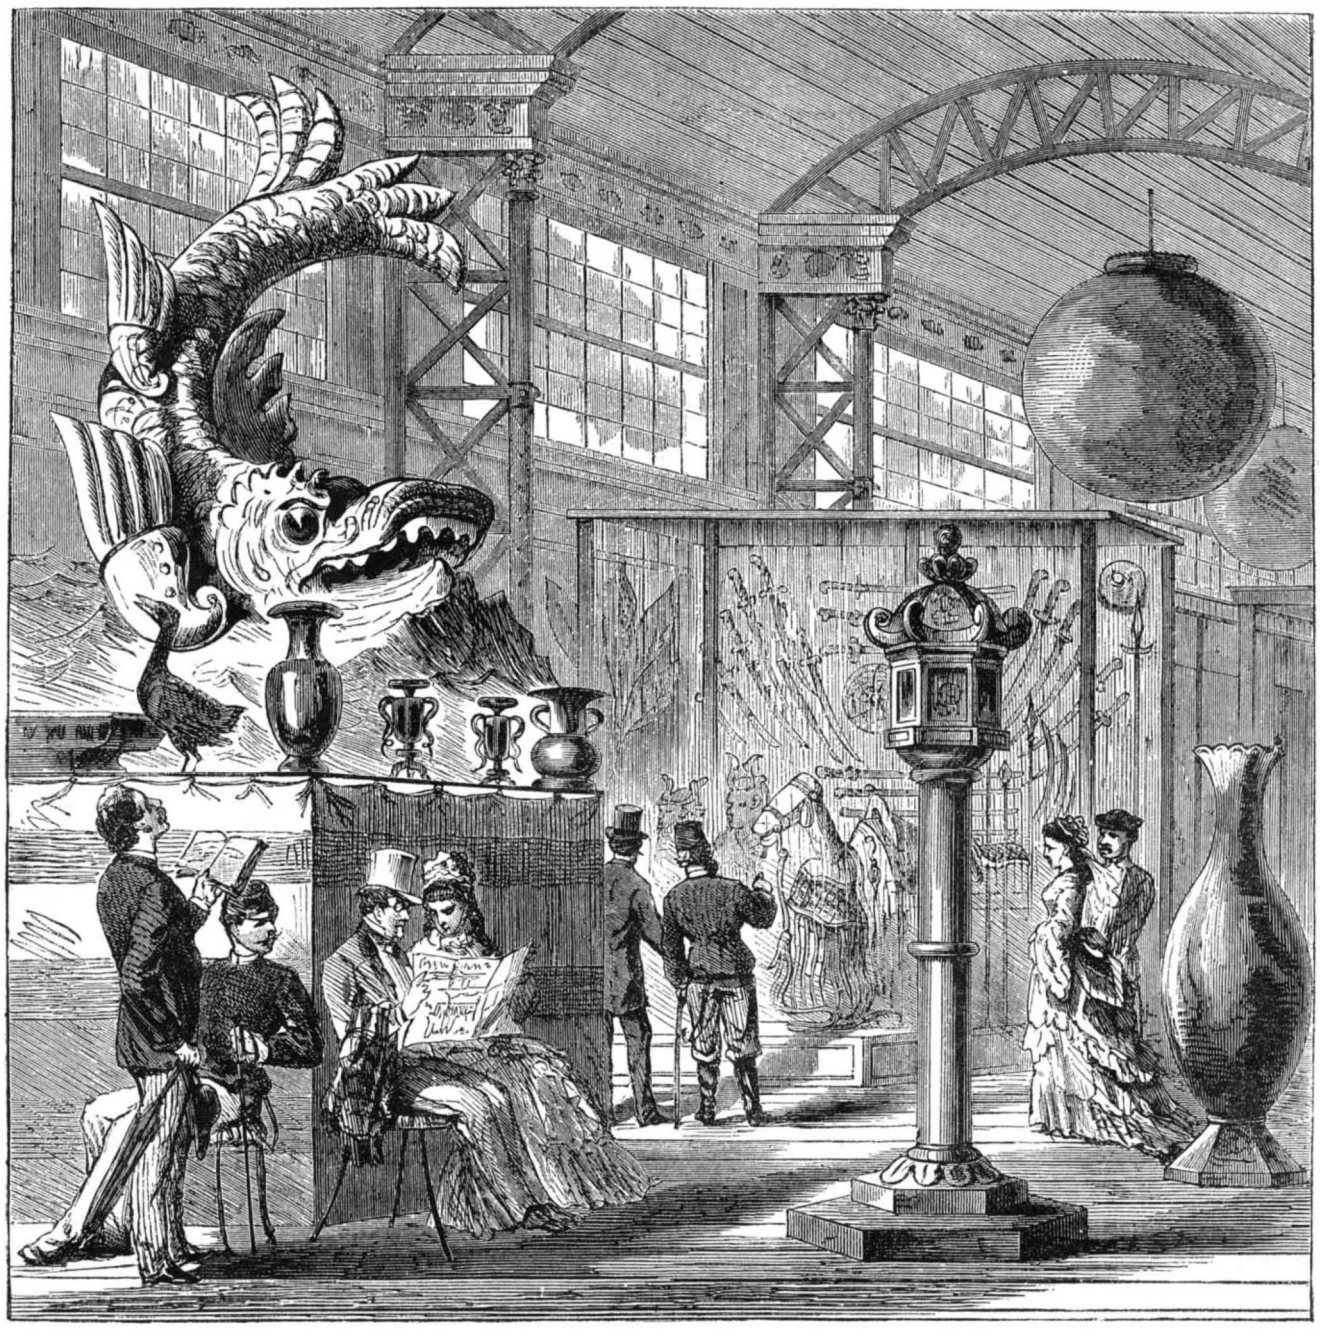

THE JAPANESE DEPARTMENT AT THE VIENNA SHOW.

POTATO BLIGHT AND ROT.

Dr. Thomas Taylor, of Washington, D. C., communicates to *The Lens* the result of experiments upon potatoes, for the examination into the chemical and structural theories of Dr. Lyon Playfair and the fungoid views of several leading mycologists. Among other tubers, one half of a potato brought from Santa Fé, New Mexico, was placed in water with a diseased specimen and the other half in water to which sugar had been added. An Ohio potato was similarly arranged, and the effect of allowing it thus to remain for a considerable period noted. On the twentieth day, the Ohio specimen had entirely dissolved, while the Santa Fé potato was uninjured. Comparing the portions in the sugared water, the Ohio tuber appeared a mass of infusorial life, mycelium, and budding spores, with a strong odor, no starch cells being discernible.

The New Mexican specimen showed few infusoria, and the starch granules arranged in cellulose, between which bundles of mycelium and budding spores appeared in profusion. No liberated granules were visible. Since the see experiments, other northern and eastern varieties have been tested by fungoid solutions in contrast with some of the New Mexican varieties, giving like results, clearly demonstrating the superiority of the Santa Fé potatoes, over all others thus far examined, in respect to their powers of resisting fungoid and infusorial action.

We note that the government is about to test, by samples

© 1873 SCIENTIFIC AMERICAN, INC

of every variety of potato from the above mentioned locality, their anti-fungoid qualities in the open field and in contrast with the usual varieties grown in that section of the country.

THE NEW EXPLORATION OF THE AMAZON RIVER, BY PROFESSOR ORTON.---UP THE AMAZONS.

No. 8.

A THOUSAND MILES ON THE GREAT RIVER.—SCENERY.

A voyage on the Amazons is excessively monotonous. A vast volume of smooth, yellow water, floating trees and grass, low, linear-shaped islets, a dark, even forest, the shore of a boundless sea of verdure, and a cloudless sky with occasional flocks of screaming parrots, these are the general features. No busy towns are seen along the banks; only here and there a palm hut or Indian village, half buried in the wilderness. No mountains break the horizon, only a half a dozen table-topped hills; and while many bluffs of red and yellow clay are visible, they are exceptional, the usual border being low alluvial deposits, magnificently wooded, but half the year covered with water. The real grandeur, however, of a great river like this is derived from reflecting upon its prospective commercial importance and immense drainage. A lover of Nature, moreover, can never tire of gazing at the picturesque grouping and variety of trees with their mantles of creeping plants; the wild, unconquered race of vegetable giants; the "reckless energy of vegetation," compared with which the richest woods on the Hudson are a desert; the dense canopy of green, supported by crowded columns, branchless for fifty or eighty feet; the parasites and undergrowth struggling for life; the broad-leaved bananas and gigantic grasses; the colossal nut and pod-bearing trees; and above all the hundreds of species of palms, each vying with the other in beauty and grace. Through such a densely packed forest flows the Amazons with all the grandeur of an ocean current.

In giving our voyage up the great river to its source among the Andes, we shall touch only at representative points, and confine ourselves mainly to such commercial and industrial facts as will be likely to interest the practical man. From Pará to Santarém, the first town of importance, is 543 miles. The passage can be made by steamer once a week, sometimes oftener; fare, $25; time, four days. Twenty hours after leaving the capital, the steamer stops at the little village of Breves on the southwest corner of the great island of Marajó. Rubber is the chief article of export. Here begins a labyrinth of narrow channels connecting the Amazons with the Pará; and as the forest is usually luxuriant, the sail through to the Great River is the most memorable part of the whole voyage. Here the palms are seen in all their glory; the slender assaï and jupatí with their long, plume-like leaves, the míritĭ with enormous fan-like leaves, and the bussú with stiff, entire leaves, some thirty feet long. The banks are frequently bordered with heart-shaped arums and waving arrow grass, or with plantations of the cacao tree and mandioca shrub.

The first view of the Amazons is disappointing, as it is nearly filled up with islands, but where the Xingú comes in, it shows its greatness, being ten miles wide. At the mouth of this tributary is situated the pretty village of Porto de Mos, now numbering but 800 souls, but destined to be an important center in the rubber trade, while the country up the Xingú is admirably adapted for coffee. Passing the singular hills of Almeyrém and the rightly named village of Monte Alégre, famous for its cattle, we reach

SANTAREM

at the mouth of the Tapajós. This ambitious but, to an American, sleepy looking city is the half-way station between Pará and Manáos, and is now aspiring to become the capital of a new province, to be called Baixo-Amazonas, extending from Obydos to Gurupá. It is not thriving, however, barely maintaining its old number of 2,500 souls. Of these about 2,000 are Indians, Negros, and mixed, including two hundred slaves. The situation is beautiful, lying on a green slope facing the clear Tapajós, with undulating campos and flat-topped hills in the rear. Three or four long rows of low, whitewashed, tiled houses, with less than half a dozen two-storied buildings and one Jesuit church, make up the city. There is a "Collegio" for boys and girls, the former department having fifty students varying in age from eight to sixteen, and a course of four years for the study of grammar, arithmetic, geography, history, French, Latin, algebra, and geometry. Just now there is a conflict between the Jesuits and the Masonic order, the government siding with the latter. The priest declared from the pulpit he should obey Rome rather than Rio. The climate of Santarém is delightful, the trade winds tempering the heat (which is seldom above 83°) and driving away all insect pests. The chief diseases are syphilis and fevers. Dr. Stroope, an immigrant from Arkansas, is the sole physician. The soil in the immediate neighborhood is sandy and poor; but inland, especially, where the

AMERICAN COLONISTS

have located, it is exceedingly fertile, rice, for example, having a yield of seventy-five bushels to the acre, and tobacco, one thousand pounds. The great want is a laboring class; there are too many shopkeepers and too few workers. Yet such as are willing to work can be hired for fifty cents a day. One paper, a foot square, is published weekly. The following prices will give some idea of living at Santarém: Wheat flour (mostly from Harper's Ferry, U. S.) costs $16 a barrel; and New York goods generally sell at three times their original value, the chief addition being made at the custom house at Pará. Agricultural implements are at double their price. Butter (all from England and the United States), 80 cents a pound; Holland cheese, 75 cents; Newfoundland codfish, 20 cents a pound; Lowell domestics, from 25 to 40 cents a meter; sawn lumber, $20 a hundred. Of home productions, cacao sells in the city from $2.10 to $2.20 an arroba (32 lbs.); coffee from 16 to 24 cents a pound; sirup (no sugar is made), 40 cents a frasca (5 pints); maize, $2 a bushel; cachaça rum, 50 cents a gallon: peanuts, $2 a bushel; Brazil nuts, $1.50 a bushel; farina, $5 a bushel; tobacco, $1 to $1.25 a pound; lime, $3 a barrel; pork, 35 to 40 cents a pound; beef, 7 to 9 cents a pound; hides, at the ranchos, 5 cents a pound, at Santarém, 7 cents a pound, at Pará, 12 to 14; cattle, at the ranchos, $15 to $20, at Santarém, $25 to $28, at Pará, $35 to $50; horses, at the ranchos, $35 to $40, at Santarém, $40 to $50, at Pará, $50 to $100.

The best paying business at Santarém would be in the manufacture of brick, leather, and lumber. The only articles manufactured are cajú wine, cachaça, soap, and lime. Nearly all the following exports, given in the order of their valuation, come down the Tapajós: Rubber (about 7,000 arrobas annually), cacao, hides, dried beef, fish, farina, salsaparilla, tobacco, guaraná, copaiba oil, Brazil nuts, tallow, cattle, horses, and lime. Coffee, sugar, and rice are imported from below, although hardly any part of the Amazons valley would produce more. Rubber gathering has not only killed agriculture, but drained the district of 2,000 inhabitants.

Santarém is of interest to the American reader as it was selected for colonization by emigrants from the Southern States. Most of the colonists have left, only six families remaining; but these contain nearly all the enterprise and intelligence of the motley party that left Mobile in 1867. These have chosen their plantations on the slopes of the hills, six miles south of the city, and are astonishing the Brazilians with the results of their industry. The land is rated at 22 cents an acre; but practically the colonists enjoy "squatter sovereignty," pre-empting a square mile, and paying no taxes except on exports. They can sell their improvements, but not the land. The soil is black and very fertile. It beats South Carolina, yielding, without culture, 30 bushels of rice per acre. Sugar cane grows eight feet high, or twice the length of Louisiana cane, and fully as sweet. Sweet potatoes grow naturally; indeed it is impossible to exterminate the plant. Broom corn and cotton grow luxuriantly. Indian corn does not mature well; turnips grow finely, but do not come to seed; grapes do well, but the ants devour them. The following

VALUABLE VEGETABLE PRODUCTS

abound at the American settlement: abio, ata, pine apple, pikiá, papaw, aracá, ingá, abacati, bread fruit, orange, banana, cocoa nut, peach palm, cupuassú, cajú, cará (or yam, four or five kinds), three kinds of mandioca, tomato, pepper, ginger, Brazil nuts, tonka bean, sugar cane, sweet potato, squash, Lima bean, rice, tobacco, indigo, and pita; while in the dense forest we find the following trees, many of them unknown to commerce, but furnishing the richest cabinet woods or timber: itaüba (often 60 feet high and 4 feet through), cedar (specimens of which occur 100 feet high and 7 feet in diameter), jutahí (a very hard, dark wood, used for sugar mill rollers, etc.,) sapucaya (resembling hickory, the clear trunk of which is often 50 feet high), loira (the pine of the country), moira-pushúva (similar to black walnut), cumarú, sapupéra, macacaúba (very close grained), acariúba (very durable), javána, rosewood, pracuúba (very hard), pao-mulatto, pao-prito, pao-d'arco, and andiróba. With Nature so generous, with a healthy location at the outlet of the rich Tapajós, and, though 500 miles from the sea, accessible to Atlantic vessels of heavy tunnage, Santarèm is sure of a brighter future. From Santarém to

MANAOS,

the capital of the upper province of Amazonas and the second city in magnitude on the river, is 460 miles. Three villages of importance are passed in this voyage: Obydos (seated beside a bluff on the "narrows," where the river, contracting to a strait not a mile wide, has a depth of forty fathoms and a current of 2·4 feet per second) exports considerable cacao and Brazil nuts. Villa Bella, insignificant in itself, is the outlet of a large and rich inland district, exporting cacao, guaraná (from Manés), piraracú fish, bast, Brazil nuts, tonka beans, tobacco, coffee, caferána, copaiba oil, hides, and beef, but importing almost every necessary of life. And Serpa, built on a high bank of variegated clay, nearly opposite the entrance of the Madeira, has a deep water frontage, where vessels might easily dispense with lighters, montarias, etc. But wharves and piers are yet to be on the Amazons. The excuse for not building them is that the great difference between high and low water (50 feet) precludes their construction. We think any experienced mechanic from the North could easily show that piers on the river are among the possibles, and at the same time reap a fortune for himself. One is greatly needed at Manáos, where sometimes twenty-five steamers unload every month.

On the left bank of the dark Rio Negro, ten miles from its junction with the Amazons, stands the St. Louis of Brazil, the city of Manáos. The site is admirably located for either residence or commerce. It is uneven and rocky, twenty feet above high water mark. The river in front is deep enough for the Great Eastern, and its banks for hundreds of miles are packed with a luxuriant forest of valuable trees. The soil is fertile in the tropical sense; and the climate is Neapolitan, Nature having left little to be desired in this respect. We did not see the mercury rise above 93° at midday, and the nights are invariably cool, with but few mosquitos. The country around is quite romantic for the valley, being undulating and covered with picturesque vegetation; while the *igarapés* or canoe paths winding through the forest are among the most beautiful features in the Amazonian landscape.

The city, for a long time stagnant, is now rapidly improving. As we saw it in 1867, it was meanly built, without a show of enterprise, without a hotel, and not 3,000 inhabitants. It now numbers 5,000 souls, with 17,000 in the district, a mixture of Brazilians, Portuguese, Negros, Indians, Italians, Jews, Germans, and English; it has a fine cathedral, to cost, when completed, $200,000, and a President's palace in process of construction; two hotels and a market, beside many elegant private houses. The city is lighted with 500 kerosene lamps, has day and night schools, with an *Episcopal Seminario*, three newspapers, one daily; and one two horse carriage, which is advertised "to let, rain or shine." But there is neither bank nor book store.

Agriculture, as everywhere on the Amazons, is dead; even farina, the bread of the land, is imported from Pará, although this is the mandioca country. In fact, there is a constant lack of food in the city.

PRICE OF LABOR AND PRODUCTIONS.

The only productive industry worth mentioning is seen in one steam saw mill, one brick and tile establishment, and one soap factory. Masons and carpenters get from $2.50 to $5.00 a day; pilots $100 a month; and physicians $5 a visit. The daily "Commercio de Amazonas" costs $10.00 a year. Hotels, $2 per day. The following prices, current the present month (August), will serve to illustrate life a thousand miles up the Amazons: Cacao, $2.20 an arroba; tonka beans, 20 cents per kilogramme; puxurí (nutmegs), 90 cents per kilogramme; guaraná, 68 cents per kilogramme; Brazil nuts, 5 cents per kilogramme; copaiba oil, 70 cents per kilogramme; fish glue, 90 cents per kilogramme; dried meat, 21 cents per kilogramme; dried pirarucú fish, 23 cents per kilogramme; vanilla, 45 cents per kilogramme; indigo, $2 per kilogramme: salsaparilla in bundle, 80 cents per kilogramme; tucum thread, $1.00 per kilogramme; tallow, refined, 90 cents per kilogramme; rubber, from 56 cents to 85 cents per kilogramme; rubber, in liquid, $2.53 per kilogramme; aguardente (cane rum), from 15 to 20 cents a liter: tapioca, 20 cents a liter; piassaba in the rough, 12 cents per kilogramme; piassaba cord, 50 cents a centimeter; piassaba brooms, $1.60 a dozen; estopa or bast, 9 cents per kilogramme; hides, 26 cents per kilogramme; cotton hammocks, from $5 to $14 each; tucum hammocks, feathered, $45; cedar logs, $1 per meter; cedar or itaúba boards, sixteen feet long, eight inches wide, unplaned, $18 a dozen; cabinet wood in boards, 45 cents a meter; steamer fuel, $20 a thousand sticks, each weighing on the average fifteen pounds*; native brick (8×6×2 inches) and tiles, from $50 to $75 a hundred, at Pará $35; the ordinary red sandstone rock, which abounds in the vicinity, unworked, 75 cents a cubic foot.

DUTIES AND FREIGHTS.

The provincial duty on liquors is 25 per cent; on rubber, 12 per cent; on fish, 5 per cent; on all other articles, 10 per cent. If exported, 5 per cent extra is collected at Pará, besides fees. Rubber collected in Peru and Bolivia pays no duty. Steamer freight between Manáos and Pará, on rubber, 25 cents an arroba; on coffee and cacao, 24 cents an arroba; on Brazil nuts, 35 cents a bushel; on brick, $20 a thousand; cotton, 30 cents an arroba; hides, 20 cents each; crude piassaba, 25 cents an arroba; salsaparilla, 30 cents an arroba; tobacco, 25 cents an arroba; boards, $3.30 per dozen; beeves, $7.50 each; horses and mules, $10 each. Freights between Manáos and San Antonio on the Madeira; on rubber and salsaparilla, 40 cents an arroba; cacao, coffee, dried beef and tallow, 32 cents an arroba; Brazil nuts in sacks, 35 cents a bushel; hides 25 cents each. To Hyutanahan on the Purús, the tariff is about the same.

The produce of the Rio Negro and Solimoens does not stop at Manáos, but goes directly to Pará, and must be purchased there. This is owing to the fact that Pará merchants have put the producers under obligation, so that producers up the river cannot sell at an intermediate place. But Manaos is determined to become independent of Pará; and the project of a through line of steamers from Manáos to Europe is on foot. With a healthy climate and fertile soil, a situation near the mouths of four great rivers, the Maderia, Negro, Purús and Juruá, and having water communication with two thirds of the continent, this city has commercial advantages unsurpassed. What it wants is an even and generous legislation and an industrial class.

JAMES ORTON.

Honors to Operatives and Foremen.

The Society of Arts and Manufactures, Vienna, has issued 134 silver medals, with diplomas, to operatives and foremen, recommended for the honor by employers who were exhibitors at the Exposition.

The distribution is as follows:

United States of America	5
Great Britain	10
France	18
Germany	13
Italy	9
Switzerland	5
Belgium	5
Holland	4
Portugal	5
Denmark	4
Sweden	7
Russia	5
Greece	3

*Cutting wood for the steamers is very lucrative. Many will soon go into the business with steam or horse power and make fortunes. The forest is free to all. The great difficulty in ascending high up certain tributaries is not so much the lack of water as the lack of fuel, there being no one to cut it.

© 1873 SCIENTIFIC AMERICAN, INC

Trial of Steam Canal Boats on the Erie Canal, in Competition for the State Reward of One Hundred Thousand Dollars.

The trial of steam canal boats on the Erie canal, in competition for the $100,000 prize, came off between Syracuse and Utica, N. Y., on October 15 and 16.

The members of the State Commission present at the trial were Van R. Richmond, George Geddes, John D. Fay, E. S. Prosser, Daniel Crouse, W. S. Nelson, and George W. Chapman; also D. M. Greene, engineer in charge, and H. A. Petrie, Secretary of the Commission.

The boats were required to be able to carry 200 tuns of cargo, besides their motive power, and to make an average of three miles an hour. But none of the boats made this time, and none can claim the reward.

The following is a brief description of the five competing boats, their machinery, etc.

THE WILLIAM BAXTER

was built especially to compete for the prize. She is 96 feet long and 17 feet beam, and has much sharper lines than the ordinary canal boats. Her bottom is perfectly flat, and her sides, stem, and stern, vertical. The outlines of the immersed portions of her bow and stern are the same. She has an overhanging deck at the stern to protect her propellers, and with 200 tuns of cargo she draws 5½ feet water. Her machinery consists of a Baxter upright boiler, and a pair of Baxter compound condensing engines, 7x12 and 12x12. Her boiler is 6 feet high, 46 inches diameter, and has 152 two inch flues, and a grate surface of 7 feet. She is propelled by 2 three bladed twin screws, of 4½ feet diameter and 4 feet pitch. The amount of coal consumed in running from Syracuse to Utica, a distance of 56 miles, was 830 lbs.

THE PORT BYRON.

This is a full sized canal boat of the ordinary outlines, but with a recess or trunk, extending along the center of the bottom of the boat and terminating in an opening, cut in the stern for the reception of the paddle wheel. This paddle wheel is 10 feet in diameter and has eight feathering paddles made of boiler iron. The wheel is driven by two 12x24 horizontal non-condensing engines, which are set on the quarter. The amount of coal consumed from Syracuse to Utica was 4,450 lbs.

THE CENTRAL CITY.

This boat is built somewhat sharper at the bow than the ordinary boats. She is 96 feet long and 17 feet 4 inches wide; and she is driven by two common paddle wheels, placed in recesses cut in the stern. These wheels are of 9 feet diameter, and are driven by a 10x17 horizontal engine. The boiler is 16 feet long and 4 feet diameter. The peculiarity of this boat consists in an arrangement for raising and lowering the paddle wheels and machinery, so as to obtain an uniform immersion of paddles without regard to the draft of water. This adjustment is accomplished by means of four vertical screws, on which the entire machinery, engine, and boiler, rest. The amount of coal consumed from Syracuse to Utica was 7,280 lbs.

THE C. C. POPE

is a regular canal boat of the largest size, to which the screw propeller and machinery are attached without any cutting away of the hull of the boat. A common screw is placed on the outside of the stern in a triangular frame, and an upright shaft and gearing connect this with the engine. The propeller wheel is raised and lowered by means of a screw to suit variable depths of water. The engine is 10x12, and, with the boiler, occupies but 12 feet of the length of the boat, at the stern. This boat has a steam windlass attached, which is used in hoisting cargo and pulling the boat in and out of locks. The amount of coal consumed from Syracuse to Utica was 3,454 lbs.

THE WILLIAM NEWMAN

is on about the same model as last year, but has a Hubbard hydraulic propeller in place of her old screw. She has an horizontal tubular boiler, 8 feet long and 44 inches in diameter, and a grate surface of 13 feet; and she is driven by a single 12x12 upright engine. The propeller is 4 feet 8 inches in diameter and 3 feet long. The amount of coal consumed from Syracuse to Utica was 4,500 pounds.

The boats left Syracuse, October 15, as follows:

William Baxter	6:23 A. M.
Port Byron	9:15 "
Central City	10:16 "
C. C. Pope	11:00 "
William Newman	11:19 "

They arrived at Rome as follows:

William Baxter	9:26 P. M., October 15.
C. C. Pope	5:30 A. M., " 16.
Port Byron	6:09 " " "
Central City	6:55 " " "
William Newman	8:53 " " "

The boats left Rome as follows:

William Baxter	9:45 P. M., October 15.
C. C. Pope	8:40 A. M., " 16.
Port Byron	9:00 " " "
Central City	9:10 " " "
William Newman	9:50 " " "

The boats arrived at Utica dock, October 16:

William Baxter	2:30 A. M.
C. C. Pope	1:22 P. M.
Port Byron	2:15 "
Central City	2:18 "
William Newman	2:31 "

The detentions of the various boats along the way were very great, the total detentions of the Newman alone being about five hours.

The Syracuse *Journal* gives the following conclusions, drawn from remarks made by several of the commissioners:

1. That it is quite impossible to invent any machinery that will propel a boat carrying two hundred tuns at a less cost than when moved by horse power, with the present dimensions of the canal.

2. That boats, as now constructed, are too large for the capacity of the canal, their progress being retarded by natural and well known laws relating to space for the displacement of water.

3. That as the law requires that inventions shall be of a character making them practical for superseding horse power, an award is not likely to follow the test.

4. The law requires a speed of at least three miles an hour; and as none of the boats made that time, an award cannot be legally made.

SEE announcement on another page for a special edition of the SCIENTIFIC AMERICAN. Sixty thousand copies to be mailed gratuitously, postage prepaid, to manufacturers, machinists, contractors, and others engaged in industrial, scientific, and mechanical pursuits. Parties having machinery or new inventions to sell will find this an unusual medium to advertise their cases.

ERRATUM.—The address of Mr. Dittenhaver, the inventor of the wood filling described on page 186 of our current volume, is Napoleon, Ohio, and not Chapalear, Ohio.

Recent American and Foreign Patents.

Improved Check Runner.

John Haggerty, Corry, Pa.—This invention consists in providing the base portion of the loop or runner with projections, to prevent the same turning on its axis, and in combining therewith a screw and disk (or washer) which are applied to the opposite side of the strap or head piece of the bridle.

Improved Car Coupling.

William F. Senior, Ripley, Ohio.—Two arms are placed in the cavity of the hopper-shaped coupling box. The forward ends of the arms are rounded off, and rest against concave shoulders formed in the forward parts of the sides of the box, where they are securely pivoted to said box, the said shoulders projecting inward sufficiently to prevent the forward ends of the arms from being struck by the entering coupling bar. Springs are placed between the rear ends of the arms and the sides of the box, and are designed to hold the rear ends of the said arms pressed inward or toward each other. The ends of the coupling bar are rounded off, and have shoulders formed upon their sides, so as, when pushed in, to force the inner ends of the arms apart. As the shoulders of the end of the coupling bar pass the ends of the arms, the springs force the arms inward, so that the shoulders of the said coupling bar may rest against the ends of the arms, which thus sustain the draft. In the cavity of the box is formed a recess to receive the coupling bar and center it, so that it may bear equally upon the arms. Upon the inner ends of the arms are formed projections, between which is placed a block, so that the arms may be forced apart to release the coupling bar, by turning the said block, which is thus protected from being struck by the entering coupling bar. The block is attached to the end of a crank which passes up the platform of the car, so that the arms may be forced apart to release the coupling bar by turning the same. When the crank is released, a spring brings the block parallel with the projections of the arms. With this construction, when the cars are being run together, should the end of the coupling bar drop too low, it may be raised and held in proper position by the attendant from the platform of the car by means of a rod having a hook formed upon its end, or from the top of the car, by using a longer rod. The cars may thus be coupled without danger. By suitable construction, the cars can be readily uncoupled when under headway.

Improved Nut Lock.

Homard C. Lowe, Northeast, Md., assignor to himself and John B. Haley, of same place.—This invention is an improvement in the class of nut locks in which a metal plate is placed in a recess of the washer of the nut, and its ends bent up against the sides of the latter. The improvement relates to the combination of a washer provided with projections on its under side, and two straight grooves in its face (the same crossing each other at right angles), and a sheet metal locking plate, whose form is that of a Latin cross, to adapt it to fit in said grooves, and thus form a double lock for the nut.

Improved Stamp Mill for Ores.

Giles S. Olin, Deer Lodge, Montana Ter.—The object of this invention is to improve the machines now in use for crushing quartz in the process of mining. The cam shafts are supported in boxes on the uprights. There are rubber springs on the stamp stems, which are compressed by the cam as the stamps rise and react to give the stamp a quick downward movement. The stamps are placed on the hypotenuse of the triangular bed, and the coarse quartz is fed through a hopper under the most elevated stamp, which has the coarsest screen. After undergoing the stamping process within this screen, the quartz is spouted under the next stamp, whose screen is finer, and from this it is spouted under the last stamp, and when it passes from the last and finest screen it has been reduced to powder. The quartz falls by its own gravity from one stamp to another through the spout. This is what is called spouting the quartz from one stamp to the other. The screens not only increase in fineness as the quartz descends, but also in speed, and are reduced in lift from the first to the last stamp. By reducing the lift and increasing the speed of the lower stamps, the latter are made to work nearer the dies.

Improved Head Band.

Daniel McKinnon, Wappinger's Falls, N. Y., assignor to Elias Brown, of same place.—The band is made in one piece, in the form of a bow, of horn, rubber, or any other suitable material, and its extremities are provided with hooks the office of which is to hook into the hair of the wearer, so as to bind and ornament the same.

Improved Chandelier Center.

Joseph Kintz, West Meriden, Conn., assignor to himself and P. J. Clark, of same place.—The first feature of the invention consists in a construction of the center in such manner that the lower part can be readily lowered away from the upper part, and the center thereby opened to allow the arms to be put in without entirely removing the lower part, although the lower knob, which, together with the rod and upper knob, secures the parts together, be removed. The second part consists of the arrangement of the hooks on the inner ends of the arms by which they are secured to the center. The third part consists of openings in the lower part of the middle portion of the center, in connection with the contrivances for securing the hooks of the arms to facilitate the connection of them, and securely hold them when connected. The fourth part consists of a bearing flange projecting from the under side of the top part of the center to secure the upper hooks of the arms: and the fifth part consists of a connection of the suspending rod to the center, so as to prevent it from turning when screwing the knobs.

Improved Can for Paint, etc.

Oliver E. Walker, Cincinnati, Ohio, assignor to himself and Charles F. Stites, of same place.—This invention consists of a paint can composed of a metal cylinder with wooden heads at each end, secured, by a flange of the cylinder end turned over the outside and a bead raised on the inside of the cylinder against the inside of the head, by impressing a groove in the outside of the cylinder. One of the heads has a large opening through it to allow of putting in and removing the paint, and a plug is used to close the hole.

Improved Revolving Fire Arm.

William H. Philip, Brooklyn, N. Y.—This invention relates to the combination of a sliding pawl bar and a series of pawls with a series of revolving cartridge cylinders arranged on the same axis, and provided with spiral and and straight grooves to enable them to be turned in succession, whereby, when one cylinder is exhausted, it sets the next one in motion, and ceases itself to rotate. The invention also consists in connecting the pawl bar and series of pawls with the hammer.

Improved Spring Rocking Chair.

Franklin Chichester, Milwaukee, Wis.—This invention relates to the construction of that class of rocking chairs which have the stationary legs or stands, with which the seat is connected, by springs, which allow it to have a rocking motion; and consists in the peculiar mode of applying a plate spring to the front of seat at the rear, and to the middle of back.

Improved Reel for Skeining Silk.

Robert Simon, New York city.—For crossing the threads of "greges, thrown, raw, and soft silks, and other threads or yarns, in skeining them, to prevent the threads from mixing and knotting together, and thus save much loss of time and waste of material in winding from the skeins upon bobbins, in consequence of the breaking and snarling common to the ordinary mode of skeining, it is proposed to have a wide reel with, say, six arms and as many longitudinal bars, in the outer sides of which are small transverse grooves. In combination with said reel there are one or more traversing guides to lay the thread on the reel, the guide being operated so that it will cross the threads at intervals between some of the bars—say, every second pair—and lay them parallel, or nearly so, between the others, and at the same time shift at each revolution of the wheel by a slow forward and backward motion, independent of the crossing motion, so as to lay the threads parallel and not directly upon each other, and thus construct flat skeins with crossed threads.

Improved Centering Chuck.

George H. Miller, Binghamton, N. Y.—This is an improved chuck for centering shafting and other work to be turned in a lathe, and consists in a frame formed of arms crossing each other, and provided with slots to receive the clamping dogs, a crank and pinion and ratchet mechanism for moving the dogs toward or from each other and holding them at any point and of a central tube and a punch working through the same.

Improved Cotton Press.

Paul Williams and Robert A. Williams, Winona, Miss.—This invention consists of joints in the screws which work the follower, whereby the latter can be swung conveniently away from over the case, to allow of filling the case with the cotton or other material to be pressed.

Improved Cock for Drawing Beer.

John Moffet, New York city.—The drawing cock is fitted into the head from the inside, and a plug is fitted in the inside extension. The outside extension is shorter than the chine of the barrel. The ventilating cock is fitted in the side of the barrel directly over the drawing cock, with its plug also inside of the barrel. There is a vent passage through the cock, and a corresponding passage through the plug, also an extension of the plug out through the cock, for the application of a wrench for turning the plugs. A rod connects the two plugs, for turning one by the other. Said rod is capable of a slight endwise motion in the plug, and a spring is arranged with it and said plug to keep both plugs tight on their seats. By turning the plu one way to open the drawing cock, the ventilating passages will be bro into line, so as to admit the air; but by turning them the other way thes passages will remain closed while the drawing cock is opened, so that ventilating passages may be opened or not, at will.

Improved Water Cooler.

Thomas Smith, Brooklyn, N. Y.—The object of this invention is to so improve the water cooler in common use that pure water or other liquids may be cooled and drawn off for use without the admixture of ice water and its impurities. It consists in arranging the receptacle for the liquids as a casing around the ice chamber of the cooler, providing it with an inclined bottom and a faucet at the lowest point thereof. A feed opening or funnel at the top admits the liquid.

Improved Griddle.

Samuel Kennedy, Allegheny City, Pa.—This invention consists of a griddle for baking pancakes having a hoop or flange projecting downward from the edge of the lower side, to elevate the griddle above the stove top and inclose a hot air space for equalizing the heat throughout the whole area of the griddle. The invention also consists of a damper, in combination with this elevated griddle and hoop or flange, for regulating the heat within the flange by opening or closing passages through it.

Improved Wheel for Vehicles.

Charles W. Spayd, Wilkesbarre, Pa.—This invention consists in the combined spoke socket and felly clip of a wheel, having one end of the socket circular, but gradually changed in shape to an oval toward the felly to allow the spoke to be wedged.

Improved Brush Washboard and Roller.

Isaac Hussey, Ironton, Ohio.—This invention relates to the application of bristle brushes in the operation of washing. A roller is employed that is made both to rotate and reciprocate over the clothes, which are themselves spread upon a stationary subjacent brush. In using the machine, the article is spread upon the brush, and the roller brush moved gently up and down upon it, said brush being immersed in the suds between each downward and upward movement.

Improved Washing Machine.

James H. Hill, Boone, Iowa.—This invention consists of a rectangular tub with corrugated or ribbed bottom and sides, mounted on trunnions at the sides on a suitable stand, so as to oscillate in its longitudinal plane, with several loose balls of wood placed in it on the clothes to act in conjunction with the water to effect the washing of the clothes. The tub is oscillated or swung on its trunnions by the attendant to cause the necessary motion of the water, balls, and clothes.

Improved Sewing Machine Power.

Alfred W. Cochran, Eufaula, Ala.—This invention consists of a sewing machine mounted on the operator's rocking chair, and having its pitman connected to the wall or other stationary object, so that, by rocking the chair, the pitman gives rotary motion to the driving wheel of the machine The sewing machine table, divested of the stand ordinarily used, is mounted on the arms of the chair in front of the operator, and swings forward and backward in unison with him, so that no inconvenience in managing the work arises from the rocking motion. The pitman is, by preference, attached to the stationary support on the horizontal plane of the crank shaft; but it may vary from it either way to some extent without material effect. The crank shaft is arranged at the front of the chair and parallel with it.

Improved Means or Adjusting Paddle Floats.

Juan B. Baptista, New York city.—The novelty of this frame and arrangement of the paddles consists of the upper and lower parallel cross bars for supporting the paddles vertically between them, and the fastening of the paddles in them by keys, or other equivalent devices, driven or screwed in holes in the paddles above and below the cross bars, the paddles having several holes at different hights. By simply taking out the keys or bolts, shifting the paddles up or down, and putting said key or bolts in again, the paddles may be readily shifted to any required condition. Thus the paddles are adapted to be changed with special facility, as often as may be required, in the navigation of rivers, bays, and other water courses having numerous sand bars and other shallow places.

Inventions Patented in England by Americans.

[Compiled from the Commissioners of Patents' Journal.]

From September 22 to September 27, 1873, inclusive.

BOOT HEEL STIFFENER.—J. W. Hatch, Rochester, N. Y.

CAR WHEEL, ETC.—J. K. Sax, Pittston, Pa.

PEAT FUEL.—W. S. Tisdale, New York city.

PURIFYING SUGAR, ETC.—J. M. O. Tamin, New York city.

ROLLING STEEL AND IRON.—D. J. Morrell, Johnstown, Pa.

SILVERING MICA.—W. M. Marshall, Philadelphia, Pa.

SWITCH, ETC.—W. Wharton, Jr., Philadelphia, Pa.

© 1873 SCIENTIFIC AMERICAN, INC

Business and Personal.

The Charge for Insertion under this head is **$1** *a Line.*

Protect your Buildings with Patent Liquid Slate Roof Paint. Fire Proof and Elastic and very Cheap. Send for Circular of Prices and Certificates. New York City Oil Co., 116 Maiden Lane, New York, Sole Agents.

Root's Wrought Iron Sectional Safety Boiler. 1,000 in use. Address Root Steam Engine Co. 2d Avenue and 28th Street, New York.

Lane's Monitor Turbine Water Wheel at the Fair of the American Institute. See advert's, p. 284.

The Jilz Well Auger is the best thing in the world for prospecting for coal and ores and boring wells. Address Well Auger Company, St. Louis, Mo.

Wanted—Manufacturers for the Best Combined Hay Rake and Tedder in use. Light, simple, durable and cheap. Principle new. Has taken First Premiums wherever shown. Testimonials, Illustrated Circulars, &c., sent by C. La Dow, So. Galway, N. Y.

Wanted—A Second Hand No. 3. Fowler Press. Address Iron, Room 19, No. 430 Walnut St., Phila.

See the Barnes Foot and Steam Power Scroll Saw, at Fairs American Institute, New York, and Chicago Industrial Exposition.

For Sale, cheap—A vertical resawing machine, in good order, Roff and Huntington's make, price $500. Enquire at 18 Cortland St., in trunk store, N.Y,

An Inventor of fine Steam Enginery to propel and steer present N. Y. & Erie Canal Boats, will show model to a party who might take chief or sole interest, low. Address, with references, Walter King, Richmond, Missouri.

Stationary and Portable Steam Engines and Boilers. Send for Circular. Clute Brothers & Co., Schenectady, N. Y.

Woodburytype—or Photographs in permanent ink, on paper and glass. Specimens on exhibition at the Fair of the American Institute. Used largely by Machinists and Manufacturers. Send for Price list to Am. Photo-Relief P'tg Co., 1002 Arch Street, Philadelphia, Pa. J. Carbutt, Manager.

One of Root's No. 4 Rotary Blowers for Sale. Used two years. J. H. Sternbergh, Reading, Pa.

Stave & Shingle Machinery. T.R.Bailey & Vail.

Patent on a powerful popular Microscope for Sale. Address James H. Logan, 12 Cedar Avenue, Allegheny, Pa.

Chicago Exposition—See Abbe's Bolt Forging Machine and Palmer's Power Spring Hammer, there on exhibition. S. C. Forsaith & Co., Manchester, N.H.

Nobody will buy the metal Truss with its pitiless Iron Finger. The New Elastic Truss, 683 Broadway, New York, holds the rupture easy till cured. Pressure all around the body.

Engines, Boilers, &c., bought, sold and exchanged. All kinds constantly on hand. Send for circular. E. E. Roberts 52 Broadway, New York.

Brown's Coalyard Quarry & Contractors' Apparatus for hoisting and conveying material by iron cable W.D. Andrews & Bro. 414 Water st. N. Y.

Cabinet Makers' Machinery. T.R.Bailey & Vail.

Sewing Machine Needle Machinery—Groovers, Reducers, Wire Cutters, Eye Punches, &c. Hendey Brothers, Wolcottville, Conn.

Buy Band Saws and Saw Benches of Gear, Boston, Mass.

Key Seat Cutting Machine. T.R.Bailey & Vail.

English Roof Paint, all mixed in oil ready for use, 50c. a gallon, 116 Maiden Lane, New York.

Patent Petroleum Linseed Oil works in all paints as Boiled Linseed Oil. Price only 50cts. a gallon, 116 Maiden Lane, New York.

Patent Chemical Metallic Paint—All shades ground in oil, and all mixed ready for use. Put up in cans, barrels, and half barrels. Price, 50c., $1, and $1.50 per gal. Send for card of colors. New York City Oil Company, Sole Agents, 116 Maiden Lane, New York.

Horizontal Engines, the Best and Cheapest, at Gear's, Boston, Mass.

We sell all Chemicals, Metallic, Oxides, and Imported Drugs; also, "Nickel Salts" and Anodes for Plating, with full printed directions on Nickel, in pamphlet form, which we mail, on receipt of fifty cents, free. A Treatise on "Soluble Glass" we mail for $1 also. Orders will receive prompt attention by addressing L. & J. W. Feuchtwanger, 55 Cedar Street, New York.

Belting—Best Philadelphia Oak Tanned. C. W. Arny, 301 and 303 Cherry Street, Philadelphia, Pa.

Mercurial Steam Blast & Hydraulic Gauges of all pressures, very accurate. T. Shaw, 913 Ridge av., Phil.

For patent Electric Watch-clocks, address Jerome Redding & Co. 30 Hanover Street, Boston, Mass.

Catalogue on Transmission of Power by Wire Rope. T. R. Bailey & Vail.

Mining, Wrecking, Pumping, Drainage, or Irrigating Machinery, for sale or rent. See advertisement, Andrew's Patent, inside page.

Tool Chests, with best tools only. Send for circular. J. T. Pratt & Co., 53 Fulton St., New York.

Lathes, Planers, Drills, Milling and Index Machines. Geo. S. Lincoln & Co., Hartford, Conn.

For Solid Emery Wheels and Machinery, send to the Union Stone Co., Boston, Mass., for circular.

All Fruit-can Tools, Ferracute, Bridgeton, N.J.

For best Presses, Dies and Fruit Can Tools Bliss & Williams, cor. of Plymouth & Jay, Brooklyn, N.Y.

Five different sizes of Gatling Guns are now manufactured at Colt's Armory, Hartford, Conn. The arger sizes have a range of over two miles. These arms are indispensable in modern warfare.

Gauge Lathe for Cabinet and all kinds of handles. Shaping Machine for Woodworking. T. R. Bailey & Vail. Lockport, N. Y

Machinists—Price List of small Tools free; Gear Wheels for Models, Price List free; Chucks and Drills, Price List free. Goodnow & Wightman, 23 Cornhill, Boston, Mass.

Drawings, Models, Machines—All kinds made to order. Towle & Unger Mf'g Co., 30 Cortlandt St., N.Y.

For Solid Wrought-iron Beams, etc., see advertisement. Address Union Iron Mills, Pittsburgh, Pa., for lithograph, etc.

Hydraulic Presses and Jacks, new and second hand. E. Lyon, 470 Grand Street, New York.

Damper Regulators and Gage Cocks—For the best. address Murrill & Keizer, Baltimore, Md.

Steam Fire Engines, R.J.Gould, Newark, N.J.

A Partner Wanted—In the manufacture of Linseed Oil; also, Oil Machinery. Address Box 159 East Des Moines, Iowa.

Peck's Patent Drop Press. For circulars, address Milo, Peck & Co., New Haven, Conn.

Boring Machine for Pulleys—no limit to capacity. T. R. Bailey & Vail, Lockport, N. Y.

2 to 8 H.P. Engines, Twiss Bros. N. Haven, Ct.

At American Institute and Chicago Exposition—Boult's Unrivaled Paneling, Variety Molding and Dovetailing Machine. Manufactured by Battle Creek Machinery Company, Battle Creek, Mich.

Wanted—Some good Stove Patterns, and a first class Moulder. E. Q. Dutton, Cato, Cayuga Co., N.Y.

Wanted—A Reversing Oscillating Engine, cylinder about 6x12. Address, with description and price, Box 559, Owego, Tioga Co., N. Y.

S. R. should paint his iron fence according to the directions on p. 295, vol. 28.—R. R. R. should correspond with a boat builder.—A. D. B. will find the manufacture of collodion described on p. 171, vol. 28.—C. C. D. & Co. should write to the inventor, whose address we gave on p. 407, vol. 26.

I. N. P. asks: What does the word *bacteria* mean, and what is its origin? Answer; Bacteria are vegetable forms of life of the lowest order. They are mere points of organized matter, liable to appear in any solid or fluid substance containing vitalized matter. The Greek *bacteria* means a staff or support, but the etymology of the word as applied to organic life is unknown to us.

E. N. M. asks: 1. What meaning have the small capital letters placed on the four corners of the postage stamp of Great Britain? 2. How many volumes were there in your old series? 3. What is the difference between a sulphide and sulphate? Answers: 1. They are merely for the guidance of the engravers of the plates. 2. Fourteen. 3. A sulphate is a compound of sulphuric acid with a base a sulphide is one of hydrosulphuric acid with a base.

C. H. G. asks: How can I make an elastic clear varnish? Can india rubber be dissolved in alcohol, and how? Answer: India rubber cannot be dissolved in alcohol. Its proper solvents are, ether, chloroform, or, better, bisulphide of carbon. An elastic varnish can be made by dissolving 1½ ozs. india rubber, cut as small as possible, in 1 pint of bisulphide of carbon.

S. P. & Co. ask: How can we deposit bright copper on unpolished cast iron by dipping? Answer: Use a solution of sulphate of copper 3½ ozs., sulphuric acid 3½ ozs., and water from 1 to 2 gallons. Small articles can be conveniently coated by jerking them about in sawdust or bran soaked in the above described solution.

P. S. asks: 1. How can I get hazel nut stains out of a linen shirt bosom? 2. Is there such a thing as a miner's compass? Answers: 1. Soak the spots with a strong solution of oxalic acid, and then throw the acid away, as it is a poison. 2. You can get a miner's compass at any optician's store. Very small samples of any substance can be sent by mail.

A. R. G. says: We are having some trouble in taking the oxide off sheet iron. We are working now with a lead tank, ½ inch thick, placed in a wooden tank; but it continually leaks. We use the oil of vitriol and water heated by a jet of steam; but when we solder the cracks, it eats the solder off. Is there any other material that will do to make boxes? We have tried wooden boxes, but cannot keep them tight. What is the best process to take the oxide off sheet iron, so that it will answer for tinning and galvanizing? Answers: You are using a good material and process for removing the oxide from the surface of the iron. The trouble with the lead lined tank can be removed by burning or melting the edges of the sheet lead together by the blowpipe, instead of soldering. This is done in the erection of sulphuric acid chambers by men called "lead burners," with some one of whom you should communicate. There is consequently no necessity for casting so expensive a contrivance when ordinary sheet lead, enclosed in wood, can be made to answer.

N. O. A. asks: How can I tell gold from other metals? How can I ascertain the fineness of gold? Answers: Metallic gold can be almost invariably distinguished by an experienced eye by its rich yellow color. Touch it with a drop of strong nitric acid and notice whether any oxidation, effervescence, etc., takes place. If no effect is produced, the article may be considered as gold on the outside. This test is, of course, only a very partial one, as the gilded sham jewelry may withstand it. To ascertain the fineness of gold, that is, how much real gold there may be in or on a gildedmetal or alloy, the specimen must be analyzed by a chemist. This can be done by dissolving the gold material in *aqua regia*, and afterwards precipitating the gold by a solution of protosulphate of iron (copperas). The precipitate (washed, dried and gently heated) is weighed as pure gold.

B. F. D. asks: Is there anything that will take the stain of nitrate of silver from the hands as well as cyanuret of potassa, and be less poisonous? Answer: Try a solution of the hyposulphite of lime, potash, or soda.

J. W. asks: How can I get rid of the unpleasant odor arising from new feathers? They have been thoroughly washed in hot water, sun aired, and well dried. Answer: Wash the feathers with a weak solution of carbonate of soda, or water to which a little solution of chloride of lime has been added, then rinse in clean water and dry thoroughly.

B. asks: Can you inform me what liquid Professor Tyndall used (in his lectures last winter) to blow his large soap bubbles with, and (2) how hydrogen soap bubbles are blown? Answers: 1. As far as we know, he used a very strong solution of hard soap. 2. Hydrogen bubbles are blown in the same way as air bubbles, hydrogen gas being delivered into the bowl of the pipe instead of air. Hydrogen is easily made by pouring dilute sulphuric acid upon scraps of zinc.

J. D. B. asks: How are transfer pictures put on, and what are the ingredients? Answer: Dissolve 2 ozs. glue, ½ lb. starch, 4 table spoonfuls glycerin in ½ gallon water. Put two coats of this on the paper to be printed, and then print in colors. Transfer the picture by damping the print, and then placing it on the object to be ornamented, the surface of which should be previously varnished.

R. B. B. asks: How can I dissolve isinglass? Answer: If you mean isinglass, a species of fine glue, it is soluble in water. If you mean mica, the transparent mineral used in stove doors, and which some people call isinglass, it is insoluble.

D. P. W. asks: Will discharging the exhaust steam into the chimney injure the same? Answer: Yes; eventually it will soften and disintegrate the bricks and mortar.

B. C. M. C. says: Please give best process for annealing small steel forgings, from ½ lb. to 10 lbs. in weight? Answer: Heat them in a muffle or sand, and allow them to cool slowly.

J. E. E. says: In your issue of October 11, page 225, under the heading of "Scientific and Practical Information," there is an account of the instantaneous lighting of the Jewish synagogue on Lexington avenue, New York city. Was the light produced by a preconceived plan? If so, please explain the *modus operandi*. Or was it involuntarily produced by the electrical influence upon the audience? Answer: It was produced by electrical influence upon small bits of platinum wire placed over the orifices of each gas burner. Series of these bits of platinum were connected by ordinary copper wires with a galvanic battery. On closing the circuit, the electricity passed through the wire and through the platinums, which, being very small, offered so much resistance to the passage of the electricity as to become heated white hot; and the gas, being at the same moment turned on, was instantly ignited.

W. A. says: It is a well known fact among practical men that no rule for width of belts is reliable, as no two rules give the same results. The greater the width of the belt, the greater is the error. If a 1 inch belt at a velocity of 750 feet per minute is right for a horse power, why do we not use a belt 50 inches wide to transmit 50 horse power? It seems that the experiments upon which the formulas have been obtained have been from small belts of single thickness. Practical results show that the power of a belt to transmit force is more nearly as the square of the breadth. "I will cite a few cases as examples, the pressure being taken in the cylinders: 1. Engine 8 x 12, pressure 70 lbs., 80 revolutions, with 5 feet driving pulley to 24 inch one on line shaft; belt 9 inches wide, of double thickness, and 41 feet long.

$$\frac{50{\cdot}26 \times 70 \times 160 \text{ feet} = 562912 \text{ foot pounds}}{\text{speed of belt } 15{\cdot}70 \times 80 = 1256 \text{ feet per minute}} = 448{\cdot}17 =$$

49·77 lbs. per inch of belt. 2. Engine 13 x 30, pressure 60 lbs., 62 revolutions, with 5 feet driving pulley and a heavy fly wheel, 15 inch double belt driving on to a 32 inch pulley on line shaft; distance between centers of pulleys, 17 feet.

$$\frac{132{\cdot}73 \times 60 \times 310 = 2468778 \text{ foot pounds}}{\text{speed of belt } 15{\cdot}70 \times 62 = 973{\cdot}40 \text{ feet per minute}} = 2536{\cdot}24$$

=169·08 lbs. per inch. 3. Results from an elevator strap 2½ inches wide, single belt, driving pulley 18 inches diameter, 124 revolutions; driving on to a 14 inch pulley without slipping; between centers of pulleys, 10 feet. Effect, 1000 lbs. raised 31 feet per minute. $\frac{31000 \text{ foot pounds}}{\text{speed of belt } 4{\cdot}712 \times 124} =$ 53·05=21·42 lbs. per inch. This weight was the utmost capacity of the belt, and more would cause it to run off. Many cases to the contrary, where bad judgment had made the results quite insignificant through the slipping of the belts, might be cited. Answer: In case proper constants are obtained by experiments with small belts, there seems to be no good reason that they should not apply to large ones. The driving power of a belt depends upon the friction between it and the surface of the pulley, which is proportional to the pressure or tension of the belt, and independent of the width. Hence, if we could make a belt one inch wide strong enough, it might transmit as much power as another belt 20 inches wide. The last example cited by our correspondent is a reliable one, giving observed results; and it is experiments of this kind which we would desire our readers to forward to us. The other examples, in which the power is calculated, do not seem to be so reliable. The calculations take no account of the back pressure in the cylinder, of the loss of pressure between the cylinder and boiler, of the expansion and cushion, if any, and of the friction of the moving parts. The judges at the Fair of the American Institute may have an opportunity to make tests of the value of pulley coverings in comparison with the ordinary method of transmitting power on smooth pulleys; and we hope that if they do investigate the matter, they will determine some rules that will be of value to the engineering community.

H. B. says: I commenced ferrotyping, but I get nothing but more or less foggy pictures. I am sure the fault lays in the nitrate bath. Whenever I make the bath, as soon as the silver dissolves in the water, it gets a milky appearance and gradually comes to a chestnut brown. If I leave it to stand for 24 hours it gets clear, and a brown precipitate forms. I use common well water, filtered through paper. Can you tell me what causes this brown precipitate in the nitrate silver solution? Answer: Your trouble is due to bad water. You should always use distilled water for a photo bath. You can easily make distilled water by placing a tin funnel over a water pot and boiling the water. The inner edge of the funnel should be turned up so as to form a ledge to catch the condensed water, and there should be a spout to lead off the drip. The steam that rises is condensed by contact with the funnel, runs down into the ledge and out at the spout. A common iron pot, used in the kitchen on the stove, will do.

J. G. asks: 1. What would be the best way to stop a leak in a gas pipe, where there is great expense incurred in getting at the leak? Is there any chemical composition that I can pump through the pipes to rust the leak up without injury to the pipes, as the leak is small but very troublesome? 2. Why does lightning sometimes tear and splinter trees from the ground upwards, and at other times downwards? Answers: 1. You might coat the interior of the pipe with hot coal tar, and then you could inject some rusting composition which would be drawn to the hole; after it had set, the remainder could be washed out. 2. It may be that in one case the tree is struck directly, and that in the other the stroke is communicated from the ground.

C. H. H. asks: Is there anything with which I can produce a white color on iron or brass, except by painting with ordinary white paint? Answer: You can apply a white enamel, such as you see in some iron pots. See page 149, volume XXVIII.

A. A. F. asks: 1. What makes it dangerous to load a cannon without thumbing it? What causes the powder to catch fire? 2. What particular properties have flint and steel, that fire is seen when they are brought together with quick rapid strokes? Answers: 1. The vent is closed to prevent the admission of air. 2. The friction between the two substances raises the particles that are broken off to a red heat.

W. & L. ask: What do you think of petroleum as an agency for the removal of scales from boilers? Would not an agent which is sufficiently powerful to remove or decompose a substance formed upon the flues and plates of the inside of a steam boiler also destroy the iron, as the scale is harder than iron? Petroleum possesses the property of removing the hardest scales in any steam boiler that I have yet seen. It has been brought into general use here in our locality, and more explosions have occurred here than ever before. Engineers are competent, water seemingly good, and our boiler iron has stood a tensile strain of sixty thousand pounds to the square inch. Answer: So far as we know, the petroleum does not injure the iron. It is quite possible that the boiler you speak of may have been much corroded, and that the removal of the scale revealed the defects.

C. H. S. asks: How can I make a dip for cleaning brass rough castings, so that they will look bright and retain their color when exposed to the weather? Answer: Brass, however highly polished, will not retain its bright surface long when exposed to the weather. We would therefore advise you to use a simple lacquer or varnish for the brass after it is well polished. This you can make by dissolving 8 ozs. of shellac in 1 quart of strong alcohol, and using the clear portion, applied by a fine brush on the polished brass. A good polish for brass is rottenstone made into a paste with sweet oil. You can give brass a fine color, by washing with a strong lye of red alum (1 oz. alum to 1 pint water), then rinsing with clean water, and finally finishing with fine tripoli.

J. A. asks: How many horse power have I in a stream of water with a fall of nine feet? Answer: You do not send enough data to enable us to answer this question. Probably if you communicate with water wheel manufacturers, you can obtain such information as you desire. Send them the hight of the water over the bottom of the opening, or the mean velocity with which it flows through the opening.

C. F. B. asks: How can I lay out a small bracket from a large one so as to have them both of the same pattern? Answer: You can do it by means of the pantagraph, described and illustrated on page 99, vol XXVIII.

K. F. asks: Can galena be roasted in the open air by staking, as the ordinary sulphurets are? Answer: We have never heard of the process of roasting galena being practiced. From the fact that galena melts before the blowpipe, owing to the large percentage of lead (85 per cent), if its roasting were attempted in the way indicated it would be apt to fuse and run together, thus defeating the object in view.

A. Q. N. asks: What course shall I pursue in order to become a civil engineer? What amount of education is requisite, and how can I get into the business? Can I teach myself drawing; if so, what are my best aids? Answer: It is possible for any young man with energy and talent, to educate himself, but of course there are many difficulties in the way. A good civil engineer must understand mathematics and the principles of natural philosophy; and there are many other things, which he can only acquire by experience. Try and get some position in the surveying party on a railroad, to make a start. Professor Warren's elementary works on drawing are well suited to those who wish to instruct themselves.

G. W. C. asks: 1. How can I melt brass and copper? 2. What kind of molds should be used? Will wooden ones do? Answers: 1. Use a crucible made of fire clay or black lead. 2. Molds can be made of sand or plaster of Paris. Wood will not answer.

W. asks: 1. Will you please give me a rule for finding the diameter of a wheel when the circumference is known, and *vice versa*? I have two arithmetics, one of which gives 3·14716 or $3\frac{1}{7}$ as the divisor or multiplicand, and the other, 3·1416. Which is right? 2. In making calculations for spur gear wheels, should I draw the circumference to the base of the teeth or calculate from the outer circumference? 3. In a process as that described on page 194, present volume, does the water evaporate or lose its bulk by expansion and condensation when there is no escape by leakage? 4. Will you name some good book that will aid me in making patterns for models? 5. Will you please tell where I can get the book that is to be issued monthly at the Patent Office? Answers: 1. The number 3·14159265 is the approximate value to be used. More commonly, we employ 3·1416, which is sufficiently correct for general operations. 2. Calculate the circumference at the pitch line, between the points mentioned. 3. The water evaporates, and has its bulk increased. The steam is then condensed, thus restoring the original bulk. 4. We do not know of any single work that will give you the desired information. 5. We suppose you refer to the weekly volume. This is not sold to private individuals.

C. C. T. asks: How far will a siphon draw water? Answer: The water will rise in a siphon to a hight due to the pressure of the atmosphere, or nearly to 34 feet.

L. H. asks: How can I construct a force pump? Does it make any difference whether I put the air chamber between the two check valves? I want it to lift water about 2 feet. I tried a ½ inch receiving valve and a ⅜ discharging valve. Answer: We get very little idea from your letter as to what you wish to accomplish. Place the air chamber beyond the delivery valve of the pump.

A. W. F. says: In your issue of August 23, 1873, on the "Manufacture of Oil of Vitriol," by J. F. Gesner, M. A., I find sulphuric acid described as H_2SO_4 and in another place as SO_3H_2O, and water as H_2O. My knowledge of chemistry would make the former HSO_4 or SO_3HO, and the latter HO. Please inform me which is the correct way. Answer: The writer of the article referred to has followed the best and most recent authorities. Chemists differ as to the symbolic notation of water, but whether we write it HO or H_2O, no difference is implied in the relative weights of the combining elements. When water is submitted to electrolysis, it is well known that hydrogen is given off at one pole and oxygen at the other. The relative weights of the gases thus evolved always remain the same, that is 8 parts by weight of oxygen are given off to 1 of hydrogen, 9 parts of water always yielding these proportions. But there are two volumes of hydrogen to one of oxygen, and the question is: Shall we regard these two volumes of hydrogen as 1 equivalent and the volume of oxygen also as 1, and regard water as a binary compound, or shall we call the 2 volumes of hydrogen, 2 equivalents, making equal volumes the equivalents of each element and regard water then as a ternary compound? Under the first supposition water is written HO, and under the second H_2O; but in H_2O, oxygen is regarded as having twice the atomic weight of the oxygen in HO, thus preserving the relative weights. Under this system the atomic weights of several other elements are also doubled, as those of carbon, sulphur, etc., hydrogen being taken as the standard.

H. H. T. asks: Are cast iron sectional boilers as safe as wrought iron boilers? Answer: In regard to sectional boilers a committee of the American Institute Fair, in 1871, made the following remarks: "Your committee feel confident that the introduction of this class of steam boilers, will do much toward the removal of the cause of that universal feeling of distrust that renders the presence of a steam boiler so objectionable in every locality. The difficulties in thoroughly inspecting these boilers, in regulating their action, and other faults of the class, are gradually being overcome, and the committee look forward with confidence to the time when their use will become general, to the exclusion of the older and more dangerous forms of boilers."

© 1873 SCIENTIFIC AMERICAN, INC

H. P. M. asks: 1. In building a chimney 75 feet in hight, which would create the most draft, one started at 2 feet square on the inside at the base, and spreading out to 3½ or 4 feet at the top, or one 2 feet square all the way up? What is the theory? 2. What is the best method of brightening up small castings in a mill? Answers: 1. Probably it would do better if made of the same size all the way up. 2. The castings may be dipped into sulphuric acid, and then placed in a revolving cylinder, or polished on a wheel.

W. S. asks: Which will sustain the greater weight, a solid stick of timber sawn 10 inches square and 30 feet long, with the ends resting upon blocks without any other support, or the same amount of timber in three separate pieces, each of 3⅓ inches in thickness, set up edgewise, side by side? If there is any difference, please give the principle. Answer: If all the sticks are of the same quality, the same amount of weight can be sustained in both cases.

F. E. P. says: In electroplating sewing machine attachments, I find it very difficult to deposit the silver on the solder at the joints. I have tried several dipping compounds, but with poor success. I have tried copper plating; but the copper will not stick firmly enough. Can you give me any information on the subject? Answer: To prepare your articles for plating: first boil them in a solution of caustic potash to free them from grease. Then dip quickly in red nitrous acid to remove any oxide from the surface, and afterwards wash well to remove every trace of acid. Then dip into a solution of mercury in cyanide of potassium (not too long), and afterwards wash in water as before. The amalgamation of the surface effected promotes the adhesion of the film of silver.

M. A. P. asks: What can I use to cement the joints of vitrified pipe for conveying strong acetic acid? Answer: Mix equal parts of pitch, resin, and well dried plaster of Paris. This is used for the masonry of chlorine chambers and vitriol works.

H. F. asks: Are there three rails used on the track of the Rigi railway? Answer: Yes, and the central rail is a rack into which a toothed wheel of the locomotive gears.

T. H. asks: What is an anemometer? Answer: The usual instrument for measuring the velocity of the wind is formed of two wires crossing at right angles, at each end of which is a cup-shaped vane, placed with its concave side to receive the current. A counter is employed to register the number of its rotations; and it must be nearly free from friction, or its indications will be valueless.

J. H. M. asks: Can you give me a recipe for staining butternut wood in imitation of black walnut? Answer: The following is highly recommended: Water 1 quart, washing soda 1½ ozs., Vandyke brown 2½ ozs., bichromate of potash ¼ oz. Boil for 10 minutes and apply with a brush.

L. C. asks: 1. What book contains the most accurate tables of the number of bricks required for walls and cisterns; the quantity of lime and sand for a certain number of bricks; the day's work for bricklayer; and the cubic yards to be excavated for a cistern, tank or cellar? 2. How is puddling for bottom of water reservoir made, and how thick should it be? Answer: We know of no book that can be relied on to give you this information. Consult a good mason, or builder. 2. Read our article on page 240, current volume.

U. T. K. asks: Can a low pressure single cylinder marine beam engine be worked with one cylinder head broken out? If it can, what course can be taken to form a vacuum in the condenser? Would it be necessary to take any buckets off the wheels? Answer: In King's work on the steam engine, page 98, this matter is referred to as follows: "Disconnect the steam and exhaust valves from the damaged end of the cylinder, if the engine be fitted with poppet valves, and let the atmospheric pressure force the piston in one direction, the steam being used for the opposite direction. Should the engine be fitted with a slide valve, close up the opening into the damaged end of the cylinder by fitting in, steam tight and in a substantial manner, a block of soft wood." In such a case, it would probably be necessary to remove some of the paddle floats, or to reef them.

T. L. B. says: In answer to my inquiry as to how I could supply a small boiler with water, you say: By the direct pressure of the steam, using an arrangement like an equilibrium oil cup. Will you please give a more definite description of the article? Answer: The appended sketch will probably enable you to understand the arrangement. A is a vessel of suitable size, connected by a pipe, B, to the check valve of the boiler, by C to the steam space, and by D to the water supply—each of these pipes having a cock or valve, so that it can be closed at pleasure. E is an escape pipe and valve, opening into the air. The operation is as follows: Close valves in pipes B and C, and open those in pipes D and E. The water will then run into the vessel A. When it is full, close valves in pipes D and E, and open valves in pipes B and C. The vessel A being above the boiler, the water will run into the boiler, as the steam pressure on top of the water in A is the same as the pressure on top of the water in the boiler.



H. C. P. asks: What weight will a flat bottomed boat, with perpendicular sides, 16 feet long x 3 feet wide x 14 inches, carry? The weight of the boat is 200 lbs. How much weight will it carry when drawing 6, 8 and 10 inches of water respectively? Can you give me a formula for it? Answer: You do not send enough dimensions to enable us to make the calculations, but we will give you the method and you can apply it. Find the area of the bottom of the boat, in square feet. Suppose that it is A square feet. Then the boat, when drawing 6, 8 and 10 inches of water, respectively, will carry the following loads: When drawing 6 inches, $A \times \frac{6}{12} \times 62{\cdot}5 - 200$. When drawing 8 inches, $A \times \frac{8}{12} \times 62{\cdot}5 - 200$. When drawing 10 inches, $A \times \frac{10}{12} \times 62{\cdot}5 - 200$.

G. S. T. asks: Will sulphur water affect a boiler injuriously, and to what extent? Is there any way of counteracting its effect, or of purifying the water? Answer; We do not think the sulphur water will injure your boiler; and we do not know of any method you can employ, to purify the water, that is sufficiently practicable for general use.

A. B. asks: How can I dissolve rubber so as to mold it into any required form? Answer: Immerse the rubber in a mixture of bisulphuret of carbon 95 parts, and rectified spirit 5 parts, until it swells into a pasty mass. It may then be molded into any desired form.

H. J. W. says: 1. Are the fumes from hot aniline dyes injurious? 2. Where can I find some account of the manner of preparing aniline colors? 3. I want small steel wire in the coil, cut into lengths of three inches; what is an ordinary and cheap process for straightening the latter? Answers: 1. We think not. 2. Reimann's work on "Aniline and its Derivatives," will give you the desired information. 3 Draw the pieces through an opening in which they bear at three points. Such an arrangement can readily be made with three nails.

E. A. P. asks: 1. Is there any known law by which to determine the amount of pressure per square inch required to compress common atmosphere to any desired volume: that is, to reduce two volumes to one, three to one, etc.? Answer: Mariottes law is: The temperature remaining the same, the volume of a given quantity of gas is inversely as the pressure which it bears. Therefore a pressure of two atmospheres will reduce the volume to one half, of three to one third, etc.

J. M. B. says, in reply to R. A. C., page 27, current volume: "I have made an entire destruction of willow swamps by chopping the trees around at any convenient hight, and stripping the bark to the ground and letting it remain; when the sap is in flow, in July or August, is as good time as any. Do not chop them down for a year or two. 4. A certain cure for nose bleeding is to extend the arm perpendicularly against a wall or post or any convenient object for a support. The arm on the side from which the blood proceeds is the one to elevate."

C. A. D. says: C. M. N. can precipitate nitrate of silver and sal ammoniac by adding to a solution of the former salt a solution of chloride of sodium or hydrochloric acid, which immediately precipitates the silver as a white flocculent precipitate, the new compound being, in the language of the chemist, Ag Cl (chloride of silver). Sal ammoniac can be precipitated by bichloride of platinum; the precipitate is of a light yellow color. These are also characteristic tests for the above named salts.

J. B. W. says: C. H. A. (page 87 of your current volume) can find the solution of his problem in Smith's "Mechanics." Of course the surface of the revolved fluid may be replaced by a rigid paraboloid, and a material particle without friction will remain at rest upon any part of the surface. The case of a ball rolling on a surface is, however, different. I will assume (and afterward prove) that the centrifugal force generated by a revolving ball is the same as if the mass were concentrated at the center of the ball. This true, the ball will be at rest when its center is confined to a parabola, whose equation, referred to the axis of revolution and a tangent at the vertex, as the axis of x and y, is $x^2 = \frac{2g}{w^2} y$, where g = force of gravity = 32·+, w = no. of feet per second passed over by a point one foot from the axis, x = the abscissa and y the ordinate of the curve: *Proposition:* If the center of the sphere S is confined to the parabola AB

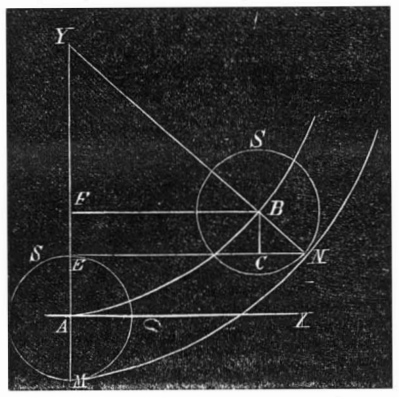

by means of the curve MN, on which the sphere rolls, the curve M N is not a parabola. Let F be the focus of the parabola and draw F B its semi-principal parameter. Draw also NBY, a normal. From the nature of the parabola, we shall there have: FB = 2FA and angle NYM = 45°. When the sphere has its center at B, the resultant pressure of the centrifugal force and gravity is in the direction BN; BN is therefore a normal not only to the parabola but also to the curve MN. But the curve at N being perpendicular to the normal, it makes an angle of 45° with YM, ∴ if it is a parabola, NE, perpendicular to YM, must be its semi-principal parameter, and E, its focus; and we must have EN=2EM. But $EN = EC + CN = EC + \frac{1}{2}\sqrt{2}\,BN = FB + \frac{1}{2}\sqrt{2}\,AM$, and $2EM = 2(FA - FE + AM) = 2(FA - \frac{1}{2}\sqrt{2}\,AM + AM) = 2FA + 2AM - \sqrt{2}\,AM$. ∴ $FB + \frac{1}{2}\sqrt{2}\,AM = 2FA + 2AM - \sqrt{2}\,AM$. But FB = 2FA. Substituting, $\frac{1}{2}\sqrt{2}\,AM = 2AM - \sqrt{2}\,AM$. Dividing by $\sqrt{2}\,AM$, we have $\frac{1}{2} = \sqrt{2} - 1$, or $1\frac{1}{2} = \sqrt{2}$, which is not true. ∴ MN is not a parabola. *Proposition:* The centrifugal pressure of a revolved sphere is the same as if its mass were concentrated at its center. Let S be a sphere revolved around AY,

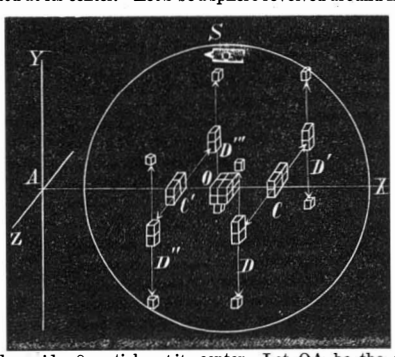

and consider 8 particles at its center. Let OA be the distance to the axis. Remove 4 of the particles to C and 4 to C′, so that AC − AO = AO − AC′. Then place 2 each at D D′ D″ D‴, equally distant in front and behind AX. Finally separate each pair by raising one particle and lowering the other a certain distance. We have now taken the 8 particles from the center and placed them in correct position in the sphere, and as this figure is symmetrical with respect to a line parallel to A Y through its center, all the particles, supposed to be concentrated at the center, may be removed by 8s and placed in position to make a homogeneous sphere. We will now show that such a change produces no change in the centrifugal pressure. Let a be the weight of a particle, ao = b, the distance to the center of sphere. co = c′o = c, the distance of removal. Then centrifugal pressure of 8 particles at the center will be $8w^2b\frac{a}{g}$, of 4 at c it will be $4w^2(b+c)\frac{a}{g}$, and of 4 at c′ it will be $4w^2(b-c)\frac{a}{g}$. Adding these, we have, for the 8 particles after removal Centrifugal pressure $= P_c = 4w^2\frac{a}{g}(b+c+b-c) = 8w^2b\frac{a}{g}$, the same as when they were at the center. Taking now a ground plan and letting cd = cd′ = d, also ad = e, we have,

Elevation or vertical projection.



Ground plan or horizontal projection.



for the centrifugal pressure of 2 particles at d: $P'_c = 2w^2e\frac{a}{g}$, but this pressure is in the direction ad, and we must resolve it into 2 parts, one in the direction cd, which will be destroyed by the opposite component of the pressure produced by the 2 particles at d′, and the other in the direction d″d, which, combined with the corresponding component of d′, will result in a pressure in the direction ac, the same as if the particles were at c. Resolving, we have for the pressure in d″d: $p''_c = 2w^2e\frac{a}{g}\cos.\,cad = 2w^2e\frac{a}{g}\frac{b+c}{e} = 2w^2(b+c)\frac{a}{g}$; and as there are 2 pairs of particles the whole pressure is $P'''_c = 4a^2(p+c)\frac{a}{g}$, the same as if the 4 particles were at c. Lastly, it is evident that there can be no change of centrifugal pressure produced by moving the particles parallel to the axis, and therefore the pairs may be separated in this manner. Therefore the particles being moved from the center of the sphere into position in its body, no change is produced in centrifugal pressure.

P. K. D. says, in answer to C. C.'s query as to press power: I would suggest that to give the amount of pressure exerted against W, it will be necessary to know the distance from B to the center of track roller. If the power was applied at the center of the track roller, then the amount would be obtained thus: Divide the length of lever E (measuring from center) by the distance from center of track roller c to a perpendicular line drawn from the point of lever attachment (to W) to the track. Multiply this by 8 (the power obtained by the line) and the result thus obtained by the 1600 lbs. This will give about 75024 lbs. Now to solve the problem given: Diminish this result in proportion to the distance that B is moved up the lever from center of track roller.

F. A. W. says, in reply to P. T.'s query as to the consumption of water by engines in cold as compared with that in hot weather: A few years ago three boilers were situated on the higher floor of a building, and were heated by gas that would otherwise escape. This gas was admitted to the boilers and regulated by means of sliding gates. The speed of the blowing cylinders was governed of course by the velocity of the engine, and the latter by an ordinary governor; but this not being sufficiently accurate, it was necessary to throttle the engine to drive it at the required number of revolutions per minute. Much practice enabled us to admit just sufficient gas to the boilers to maintain a pressure of 60 lbs. with hardly the variation of a pound in a week, and sometimes in a longer period. Nearly a year of such experience showed us that, in cold, damp weather, it was necessary to admit more gas, and in warm, pleasant weather to admit less. Of course, difference in charging would make a change in the quantity and quality of the gas, and perhaps augment the resistance of the air that was being forced into the furnace; but a long continued series of experiments, such as we were obliged to make, eventually established the fact. The boilers were supplied with a constant stream of water, regulated arbitrarily by a cock, and so accurately as not to require moving sometimes for days together. "I do not apprehend that the cold damp weather had any appreciable effect in requiring the admission of more heat to the boilers, except by the increased condensation of steam, which was not more than in ordinary engines. This same condensation will undoubtedly account for the difference, if there is any, between the effect of steam and air in a locomotive."

D. M. says, in answer to the question proposed by C. H. A. (page 187, vol. XXIX): Let there be a system of rectangular axes, having c for their origin, b c being the axis of X. Since the number of revolutions of the ball a is constant, a line equal to its distance from the axis of X and perpendicular to the same axis, may be taken to represent the centrifugal force, the force of gravitation being represented by a constant line parallel to the same axis, and which I denominate by g. Therefore at any point, x′ y′, of the curve, the resultant of the two forces will pass through the point, x′ y′, and also through a point whose equations are x = x′ − g, and y = 2y′. Therefore the equation to the resultant is $y - y' = -\frac{y'}{g}(x - x')$ which is evidently the equation to the normal of a parabola having 2g for its parameter. (See Davies' "Analytical Geometry.")

G. W. says, in reply to H. H. J., who asked as to making a combined reaper and thresher: It cannot be done. At the time grain ought to be cut, it is not dry enough to thresh; and if left standing until it is dry enough to thresh, it will shell out so as to lose half the crop, especially if the grain be oats. It was this which made useless a harvester in the western states. It cut the heads off and left the straw standing; the heads were to be stored in cribs or bins, like corn. But the heads proved to contain so much moisture as to cause mold and rot.

W. W. H. says, in answer to T. M. Jr., who asks how to preserve grapes in the bunch, fresh as when taken from the vines: When the grapes are fully ripe, clip the bunches from the vines carefully, and get a water tight keg or box. Place in the bottom of the box a layer of dried grape leaves, half an inch thick, then layers of grapes and leaves alternately until the vessel is filled; nail a board on top, and bury the vessel in the ground, where water will not stand, out of reach of frost. Grapes put up in this way will keep fresh and sound until April.

J. W. H. says, in reply to C. P. T., who wants a heavy foam on a tonic beer: Use the whites of a dozen or more eggs in a 10 gallon keg.

J. M. B. says: "I think the blistering of varnished cement tiles, which D. U. B. complains of on page 171, current volume, is caused by the expansion of the moisture contained in them when varnished. A remedy would be to drive the moisture out."

COMMUNICATIONS RECEIVED.

The Editor of the SCIENTIFIC AMERICAN acknowledges, with much pleasure, the receipt of original papers and contributions upon the following subjects:

On the Million Dollar Telescope. By W.M.R.
On Canal Navigation. By T. K.
On Hatching Eggs. By B. F. S.
On Spectroscopic Manipulation. By C. A. D
On Perpetual Motion Seekers. By F.
On Financial Science. By J. E. E.

Also enquiries from the following:

H. C. B.—C. G. T.—M. W. K.—A. V. L.—J. N. P.—G. M.—J. W. S.—W. H. B.

Correspondents in different parts of the country ask Where can I get a cross-cut saw for getting out trunks of large trees? Where can I obtain cotton seed oil machinery? Who makes shoe peg machinery, and what does it cost? Makers of the above articles will probably promote their interests by advertising, in reply, in the SCIENTIFIC AMERICAN.

Correspondents who write to ask the address of certain manufacturers, or where specified articles are to be had also those having goods for sale, or who want to find partners, should send with their communications an amount sufficient to cover the cost of publication under the head of "Business and Personal," which is specially devoted to such enquiries.

[OFFICIAL.]

Index of Inventions

FOR WHICH

Letters Patent of the United States

WERE GRANTED FOR THE WEEK ENDING

September 30, 1873,

AND EACH BEARING THAT DATE.

[Those marked (r) are reissued patents.]

Alarm, burglar, J. Pennepacker	143,379
Auger, earth, W. T. Cooley	143,276
Axle box, vehicle, O. P. Rice	143,300
Baker, folding camp, F. Lehnen	143,288
Bale tie, F. Cook	143,223
Bale tie, cotton, G. N. Beard	143,319
Bale tie, cotton, J. M. Goldsmith	143,343
Bed bottom, spring, C. W. Northrup	143,373
Bee hive, G. Miller	143,295
Bee hive, Sperry & Chandler	143,307
Blasting squib, S. H. Daddow	143,396
Boat detaching apparatus, S. Sneden (r)	5,584
Boats, propelling, A. Beekman	143,270
Boiler composition, R. Hatfull	143,240
Boot channeling, B. H. Hadley	143,237
Boot tacking, D. M. Smyth	143,388
Bracelet fastening, Ranger & Smiley	143,382
Bucket, dinner, F. E. Heinig	143,241
Buckle, harness trace, H. H. Hartzell	143,284
Building, fireproof, G. H. Johnson	143,351
Burner for carbureters, I. W. Shaler	143,385
Butter worker, E. E. Scott	143,260
Cam movement, J. E. Goodwin	143,235
Cane, walking, C. K. Pevey	143,248
Car coupling, M. Ferren	143,231
Car coupling, Griffith & Miller	143,281
Car coupling, D. M. Miller	143,368
Car coupling, J. D. Mills	143,369
Car, railroad, F. Marin	143,363
Car wheel, lubricating, J. H. Murray	143,370
Carpet fastener, C. Harting	143,238
Carriage top brace, D. W. Baird	143,316
Caster, S. Curtis	143,334
Chair, reclining, E. C. Ranks	143,299
Clamp, sash and door, R. L. Greenlee	143,236
Clock and watch key, P. J. Hoffliger	143,285
Clock, programme, S. F. Estell	143,230
Clothes wringer, H. J. Burr	143,220
Coal scuttle, A. S. Thompson	143,311
Comb frame, W. Rasey	143,383
Compressor or blower, air, L. Chase	143,329
Compressor, wood, H. A. House	143,243
Condenser tube fastening, S. Archbold	143,314
Corset clasp, P. Lippmann	143,259
Coupling and brake, Mégy *et al*	143,293
Cultivator, J. H. Frank	143,338
Cultivator, F. Perez	143,380
Drawing roll, H. T. Robbins	143,256
Dredging apparatus, E. Bazin	143,269
Dredging machine racks, R. R. Osgood	143,247
Drill chuck, L. Parmelee	143,377
Drill, rock, D. Kennedy	143,355
Earth closet, C. C. Haskins	143,239
Eaves trough hanger, T. F. Palm	143,375
Edging machine, E. H. Stearns	143,264
Engine crank connection, McGowan & Caldwell	143,292
Engine smoke stack, R. Frazer	143,339
Engine valve movement, H. C. Sergeant	143,261
Eyelet making machine, Churchill & Robinson	143,274
Fabrics, disintegrating, M. Marshall	143,290
Fare box, S. H. Little	143,360
Faucet, self-closing, McConnell *et al*	143,291
Fence, portable, H. W. & R. P. Nichols	143,372
Fertilizer from offal, J. J. Storer	143,310
Fire arm, revolving, R. White	143,394
Fire kindler, J. C. Crumpton	143,277
Fish, etc., preparing, W. Sharp	143,386
Furnace, boiler, C. D. Smith	143,305
Furnace, puddling, E. Riley	143,301
Gas cut-off, etc., C. E. Seal (r)	5,585
Gate, swinging, Gentry & Collett	143,342
Grain, etc. transporting, J. & G. Richards	143,254

© 1873 SCIENTIFIC AMERICAN, INC

Grate bar, A. F. Crowell..... 143,224
Hammocks, suspending, O. Tufts..... 143,392
Harness pad, W.A. Reddick..... 143,253
Harness saddle tree, M. W. Pond..... 143,381
Harvester dropper, J. S. Truxell..... 143,391
Hinge and spring, W. Gilfillan..... 143,234
Hook, snap, J. C. Covert..... 143,332
Hook, tag, Marston & Phillips..... 143,364
Horses, checking, J. Jackson 143,244
Horses, detaching, R. R. Jones..... 143,286
Horseshoe, J. B. Johnston..... 143,353
Iron from ore, cast, P. E. Jay..... 143,350
Kaleidoscopes, object for, C. G. Bush..... 143,271
Keys, forming spring, M. Deering..... 143,226
Lamp post box clamp, P. McCosker..... 143,365
Lasting mechanism, L. R. Blake.... 143,322
Lath machine, Brower & Knox..... 143,325
Lathe, wood turning, J. Chase..... 143,221
Lathe, gear cutting, W. P. Hopkins..... 143,242
Lathe, taper turning, M. Neckermann..... 143,296
Loom picker, S. Boorn..... 143,218
Loom picking mechanism, L. E. Ross..... 143,257
Lounge, W. H. Hart..... 143,283
Lubricating compound, S. Y. Love..... 143,362
Marine drag, J. C. Beals..... 143,318
Mattress, life preserving, J. J. Woodfine..... 143,313
Meter, gas, Telling & Johnson..... 143,390
Mill, quartz, T. O. Cutler..... 143,336
Mill feed regulator, E. H. Austin..... 143,315
Millstone cooling device, J. J. Roth..... 143,258
Mitering machine, J. H. Van Ness..... 143,265
Motion, preventing back, A. H. and J. H. Race... 143,252
Nail, capped, C. Walsh..... 143,393
Nail separating apparatus, A. Morrison..... 143,246
Oil cup, A. T. Ballentine..... 143,216
Ordnance and projectile therefor, B. C. Pole..... 143,251
Paper bag, L. D. Benner..... 143,321
Paper bag machine, W. Liddell..... 143,358
Pen, marking, D. S. Holman..... 143,347
Pipe coupling, W. B. Dunning..... 143,229
Pipe coupling, J. Holmes..... 143,348
Pipes, etc, cutting, W. D. Chase..... 143,273
Piston and packing, A. K. Rider..... 143,255
Planing machine, Frank & Spire..... 143,232
Planter, corn, A. F. Smith..... 143,262
Plaster patterns, J. Semple..... 143,384
Plow, W. A. Estes..... 143,279
Plow, S. W. Soule..... 143,263
Plow, subsoil, E. Cutcliffe..... 143,335
Potato bug destroyer, A. A. Mixer. 143,245
Potatoes, sorting, D. M. King..... 143,357
Press, cotton, T. R. Jackson..... 143,349
Printers' galley rest, Doyle & Murphy..... 143,228
Pump for driven wells, Harrington *et al*..... 143,345
Purifier, middlings, J. Hollingsworth..... 143,346
Railway gage, L. Kayser..... 143,287
Railway joint seat, L. Scofield, Jr..... 143,304
Railway switch, J. G. Rockwell..... 143,302
Rake, horse hay, B. J. Downing..... 143,278
Refrigerator building, W. S. Bate..... 143,317
Register point perforating device, W. Overend... 143,374
Ring, scarf, Mayhew & Leonard..... 143,366
Roof, fireproof, Johnson & Fryer..... 143,352
Saw set, B. S. Castle..... 143,272
Sawing machine, wood, B. F. Click..... 143,330
Screw, wood, O. D. Barrett..... 143,217
Screws, making metal, C. M. Spencer..... 143,306
Separator and scourer, grain, W. P. Clifford..... 143,331
Separator, coal, J. B. Wilford..... 143,395
Separator for coal, ore, etc., H. Bradford..... 143,219
Separator feed device, H. Bradford..... 143,323
Sewing machine caster, J. E. Smith 143,387
Sewing machine ruffler, C. Schullian..... 143,259
Sewing machine shuttle, W. H. Scnofield..... 143,303
Shank stiffener, W. N. Sprague..... 143,389
Shoe uppers, gumming, P. E. Clark..... 143,275
Shoes, jack for holding, A. K. Washburn..... 143,267
Shutter and blind operator, D. M. Leonard..... 143,289
Sifter, D. Pierce.. 143,250
Skirt protector, J. C. Livermore..... 143,361
Stove, cooking, G. H. Phillips, (r)..... 5,583
Stove pipe shelf, J. F. Beckwith..... 143,320
Straw cutter, A. Kindermann..... 143,356
Telegraph, district and fire alarm, J. H. Guest.... 143,344
Telegraph, multiplex, M. Gally..... 143,341
Telegraph circuit closer, M. Gally..... 143,340
Telegraph key, D. L. Parkhurst..... 143,298
Tube, speaking, J. R. Creighton (r)..... 5,580
Tubing, bending, W. T. Farre (r)..... 5,581
Tubing, bending, W. T. Farre (r)..... 5,582
Twine holder, D. Webber..... 143,268
Umbrella cover, D. W. Odiorne..... 143,297
Valve, ball, W. Mendham..... 143,294
Valve for hydraulic cranes, J. A. Vaughn..... 143,266
Vault, metallic, A.L. Stimson..... 143,309
Vehicle wheel, Chandler & Tainter..... 143,328
Vehicle wheel, J. C. Garretson..... 143,233
Vehicle wheel, P. C. Hairston..... 143,282
Vehicle wheel, L. G. Peel..... 143,378
Wagon brake, J. F. Durbin..... 143,337
Wagon boxes, fastening for, J. W. Crandall..... 143,333
Wagons, etc., loading, B. Cokly..... 143,222
Wagons, running gear for, G. Phillips..... 143,249
Washing machine, L. H. Davis..... 143,225
Washing machine, G. S. Newsom..... 143,371
Water traps, manufacture of, W. A. Butler..... 143,326
Water traps, mold for casting, W. A. Butler..... 143,327
Water wheel, turbine, J. E. Whiting..... 143,312
Weather strip, J. W. Browne..... 143,324
Weeding implement, garden, W. Jones..... 143,354
Wells, gland for oil, G. Finton..... 143,280
Windmill, G. Stearns..... 143,308
Wire, etc., coil holder for, I. E. Palmer.. 143,376
Wire cloth, painting, J. H. De Witt..... 143,227
Wrench, A. D. McMaster..... 143,367

APPLICATIONS FOR EXTENSIONS.

Applications have been duly filed, and are now pending for the extension of the following Letters Patent. Hearings upon the respective applications are appointed for the days hereinafter mentioned:

26,674.—CLOTHES DRYER.—B. B. Hawse. Dec. 17.
26,689.—PIVOT BEARING.—F. C. Lowthrop. Dec. 17.
26,785.—WASTE COCK.—G. W. Robertson. Dec. 24.
26,803.—BOOTS, ETC.—F. D. Ballou. Dec. 24.
27,455.—SPRING COVERING MACHINE.—J. T. Loft. Feb. 25.

EXTENSIONS GRANTED.

25,640.—STEAM BOILER.—J. Harrison, Jr.
25,662 —CONSTRUCTION OF PRISONS.—E. May.
25,673.—LASTING BOOTS, ETC.—J. Purinton, Jr.
25,688.—HYDRANT.—C. L. Stacy.
25,692.—SEWING MACHINE.—K. Vogel.
25,701.—SKELETON SKIRT.—J. Draper.

DISCLAIMER.

25,693.—LASTING BOOTS, ETC.—J. Purinton, Jr.

DESIGNS PATENTED.

6,895.—CALL BELL.—C.S. Barnard *et al*., W. Meriden, Conn.
6,896.—BOOT JACK.—O.F. Fogelstrand, Kensington, Conn.
6,897.—LAMP SHADE.—W. Maevers, New York city.
6,898.—TEA POT BASE.—E. B. Manning, Middletown, Ct.
6,899.—LAMP FOOT.—N. L. Bradley, West Meriden, Conn.

TRADE MARKS REGISTERED

1,473.—WINDMILL.—Atwood *et al*., San Francisco, Cal.
1,474.—PACKED OYSTERS, ETC.—Barnes & Co., Balt., Md.
1,475 & 1,476.—FERTILIZERS.—G. Dugdale & Co., Balt., Md.
1,477.—AGUE CURE.—H. Van Kiper *et al*., New York city.
1,478.—PREPARED FISH.—Dodd & Co., Gloucester, Mass.
1,479.—BRANDIES.—M. Doherty & Co., Boston, Mass.
1,480.—CHEESE.—Webb & Co., New York city.

SCHEDULE OF PATENT FEES:

On each Caveat..... $10
On each Trade-Mark..... $25
On filing each application for a Patent (17 years)... $15
On issuing each original Patent..... $20
On appeal to Examiners-in-Chief..... $10
On appeal to Commissioner of Patents..... $20
On application for Reissue..... $30
On application for Extension of Patent..... $50
On granting the Extension..... $50
On filing a Disclaimer..... $10
On an application for Desig (3½ years)..... $10
On an application for Desig (7 years)..... $15
On an application for Design (14 years)..... $30

VALUE OF PATENTS

And How to Obtain Them.

Practical Hints to Inventors.

PROBABLY no investment of a small sum of money brings a greater return than the expense incurred in obtaining a patent even when the invention is but a small one. Large inventions are found to pay correspondingly well. The names of Blanchard, Morse, Bigelow, Colt, Ericsson, Howe, McCormick, Hoe and others, who have amassed immense fortunes from their inventions, are well known. And there are thousands of others who have realized large sums from their patents.

More than FIFTY THOUSAND inventors have availed themselves of the services of MUNN & Co. during the TWENTY-SIX years they have acted as solicitors and Publishers of the SCIENTIFIC AMERICAN. They stand at the head in this class of business; and their large corps of assistants, mostly selected from the ranks of the Patent Office: men capable of rendering the best service to the inventor, from the experience practically obtained while examiners in the Patent Office: enables MUNN & Co. to do everything appertaining to patents BETTER and CHEAPER than any other reliable agency.

HOW TO OBTAIN *Patents*.

This is the closing inquiry in nearly every letter, describing some invention which comes to this office. A *positive* answer can only be had by presenting a complete application for a patent to the Commissioner of Patents. An application consists of a Model, Drawings, Petition, Oath, and full Specification. Various official rules and formalities must also be observed. The efforts of the inventor to do all this business himself are generally without success. After great perplexity and delay, he is usually glad to seek the aid of persons experienced in patent business, and have all the work done over again. The best plan is to solicit proper advice at the beginning. If the parties consulted are honorable men, the inventor may safely confide his ideas to them: they will advise whether the improvement is probably patentable, and will give him all the directions needful to protect his rights.

How Can I Best Secure My Invention?

This is an inquiry which one inventor naturally asks another, who has had some experience in obtaining patents. His answer generally is as follows, and correct:

Construct a neat model, not over a foot in any dimension—smaller if possible—and send by express, prepaid, addressed to MUNN & Co., 37 Park Row, together with a description of its operation and merits. On receipt thereof, they will examine the invention carefully, and advise you as to its patentability, free of charge. Or, if you have not time, or the means at hand, to construct a model, make as good a pen and ink sketch of the improvement as possible and send by mail. An answer as to the prospect of a patent will be received, usually, by return of mail. It is sometimes best to have a search made at the Patent Office; such a measure often saves the cost of an application for a patent.

Preliminary Examination.

In order to have such search, make out a written description of the invention, in your own words, and a pencil, or pen and ink, sketch. Send these, with the fee of $5, by mail, addressed to MUNN & Co., 37 Park Row, and in due time you will receive an acknowledgment thereof, followed by a written report in regard to the patentability of your improvement. This special search is made with great care, among the models and patents at Washington, to ascertain whether the improvement presented is patentable.

To Make an Application for a Patent.

The applicant for a patent should furnish a model of his invention if susceptible of one, although sometimes it may be dispensed with; or, if the invention be a chemical production, he must furnish samples of the ingredients of which his composition consists. These should be securely packed, the inventor's name marked on them, and sent by express, prepaid. Small models, from a distance, can often be sent cheaper by mail. The safest way to remit money is by a draft, or postal order, on New York, payable to the order of MUNN & Co. Persons who live in remote parts of the country can usually purchase drafts from their merchants on their New York correspondents.

Foreign Patents.

The population of Great Britain is 31,000,000; of France, 37,000,000; Belgium, 5,000,000; Austria, 36,000,000; Prussia, 40,000,000, and Russia, 70,000,000. Patents may be secured by American citizens in all of these countries. Now is the time, when business is dull at home, to take advantage of these immense foreig fields. Mechanical improvements of all kinds are always in demand in Europe. There will never be a better time than the present to take patents abroad. We have reliable business connections with the principal capitals of Europe. A large share of all the patents secured in foreign countries by Americans are obtained through our Agency. Address MUNN & Co., 37 Park Row, New York. Circulars with full information on foreign patents, furnished free.

Rejected Cases.

Rejected cases, or defective papers, remodeled for parties who have made applications for themselves, or through other agents. Terms moderate. Address MUNN & Co., stating particulars.

Reissues.

A reissue is granted to the original patentee, his heirs or the assignees of the entire interest, when, by reason of an insufficient or defective specification, the origina patent is invalid, provided the error has arisen from inadvertence, accident, or mistake, without any fraudulent or deceptive intention.

A patentee may, at his option, have in his reissue a separate patent for each distinct part of the invention comprehended in his original application by paying the required fee in each case, and complying with the other requirements of the law, as in original applications Address MUNN & Co., 37 Park Row, New York, for full particulars.

Caveats.

Persons desiring to file a caveat can have the papers prepared in the shortest time, by sending a sketch and description of the invention. The Government fee for a caveat is $10. A pamphlet of advice regarding applications for patents and caveats is furnished gratis, on application by mail. Address MUNN & Co. 37 Park Row New York

Canadian Patents.

On the first of September, 1872, the new patent law of Canada went into force, and patents are now granted to citizens of the United States on the same favorable terms as to citizens of the Dominion.

In order to apply for a patent in Canada, the applicant must furnish a model, specification and duplicate drawings, substantially the same as in applying for an American patent.

The patent may be taken out either for five years (government fee $20), or for ten years (government fee $40) or for fifteen years (government fee $60). The five and ten year patents may be extended to the term of fifteen years. The formalities for extension are simple and not expensive.

American inventions, even if already patented in this country, can be patented in Canada provided the American patent is not more than one year old.

All persons who desire to take out patents in Canada are requested to communicate with MUNN & Co., 37 Park Row, New York, who will give prompt attention to the business and furnish full instruction.

Value of Extended Patents.

Did patentees realize the fact that their inventions are likely to be more productive of profit during the seven years of extension than the first full term for which their patents were granted, we think more would avail themselves of the extension privilege. Patents granted prior to 1861 may be extended for seven years, for the benefit of the inventor, or of his heirs in case of the decease of fomer, by due application to the Patent Office, ninety days before the termination of the patent. The extended time inures to the benefit of the inventor, the assignees under the first term having no rights under the extension except by special agreement. The Government fee for an extension is $100, and it is necessary that good professional service be obtained to conduct the business before the Patent Office. Full information as to extensions may be had by addressing MUNN & Co. 37 Park Row, New York.

Trademarks.

Any person or firm domiciled in the United States, or any firm or corporation residing in any foreign country where similar privileges are extended to citizens of the United States, may register their designs and obtain protection. This is very important to manufacturers in this country, and equally so to foreigners. For full particulars address MUNN & Co., 37 Park Row, New York.

Design Patents.

Foreign designers and manufacturers, who send goods to this country, may secure patents here upon their new patterns, and thus prevent others from fabricating or selling the same goods in this market.

A patent for a design may be granted to any person whether citizen or alien, for any new and original design for a manufacture, bust, statue, alto relievo, or bas relief any new and original design for the printing of woolen silk, cotton, or other fabrics, any new and original impression, ornament, pattern, print, or picture, to be printed, painted, cast, or otherwise placed on or worked into any article of manufacture.

Design patents are equally as important to citizens as to foreigners. For full particulars send for pamphlet to MUNN & Co., 37 Park Row, New York.

Copies of Patents.

Persons desiring any patent issued from 1836 to November 26, 1867, can be supplied with official copies at a reasonable cost, the price depending upon the extent of drawings and length of specification.

Any patent issued since November 27, 1867, at which time the Patent Office commenced printing the drawing and specifications, may be had by remitting to this office $1.

A copy of the claims of any patent issued since 1836 will be furnished for $1.

When ordering copies, please to remit for the same as above, and state name of patentee, title of invention, and date of patent. Address MUNN & Co., Patent Solicitors 37 Park Row, New York.

MUNN & Co. will be happy to see inventors in person, at their office, or to advise them by letter. In all cases they may expect an *honest opinion*. For such consultations, opinions, and advice, *no charge is made*. Write plain; do not use pencil or pale ink; be brief.

All business committed to our care, and all consultations, are kept *secret and strictly confidential*.

In all matters pertaining to patents, such as conducting interferences, procuring extensions, drawing assignments, examinations into the validity of patents, etc. special care and attention is given. For information and for pamphlets of instruction and advice

Address

MUNN & CO.,

PUBLISHERS SCIENTIFIC AMERICAN,

37 Park Row, New York.

OFFICE IN WASHINGTON—**Corner F and 7th Streets,** opposite Patent Office.

Advertisements.

RATES OF ADVERTISING.

Back Page - - - - - - - $1.00 a line.
Inside Page - - - - - - 75 cents a line.

Engravings may head advertisements at the same rate per line, by measurement, as the letter-press.

INVENTORS'

Rights (patented and unpatented) are constantly being offered by the N.Y. Exposition and M'f'g Co. as **Investments** for capitalists who may desire a profitable business. Attention is called to McGregor's Improved Piano, Rupp's Spring Helve, Lang's Sewing Machine Cutter, Walker's Combination Rule, Ermentrout's Fishing Rod, Clark's Fishing Apparatus, Steven's Sugar Evaporator, Hopkins' Sewing Machine, Isbell's Trunk Fastener, Krum's Mowing Machine, Beddow's Car Coupling, and others. Circulars and full information sent on application. Balance of capital stock of above company is for sale to parties having inventions to negotiate. Shares $25 each, $10 down and $5 monthly till paid; 10 per cent dividends responsibly guaranteed.
E. E. ROBERTS, Pres., 52 Broadway, N.Y.



Barnes' Patent Foot & Steam Power Scroll Saw.

As a Foot Power Machine it is warranted to saw (linear measure) through Pine 3 in. thick, 1 ft. per minute; 1 in. thick, 4 ft. per minute; Walnut 3 in. thick, ½ ft. per minute; 1 in. thick, 2 ft. per minute. Every builder, cabinet and pattern maker, carver, or worker in wood should have one. Only 8 years in the market, yet thousands are using them. Send for full description to W. F. & John Barnes, Manuf'rs, Rockford, Ill.

G. E. ILLINGWORTH, Neville St. Foundry, Leeds, England, **makes a Specialty of his 10-inch Lathes.** All parts are interchangeable, being made in duplicate, by patent machinery, thus ensuring Accuracy and Excellence of Workmanship.



☞ For price and Photo, write direct.

HUNTERS' AND TRAPPERS' GUIDE

To use and care of Arms and Ammunition; making and using Traps; Snares and Nets; Baits and Baiting; Poisons; Bird Lime; Preserving, Stretching, Dressing, Tanning and Dyeing Skins and Furs; Fishing, &c. Mailed for 20 cents, by C. S. RILEY, Holland, N. Y.

FOR SALE, CHEAP—1 ten horse Portable Engine, 1 Daniel's Planer, 1 Great Shaper and Tenanter, Lathes, Saws, and other Machinery for manufacturing Cabinet Ware and Chairs; also, a nice stock of Cabinet Ware and Chairs, two Hearses and Undertaking Material. Also for Sale, a House and Lot and Shop. A good vacancy for the above business. For particulars, inquire of DAVID COON, Ypsilanti, Mich., Sept. 17, 1873.

ONE OF LANE'S CELEBRATED and popular CIRCULAR SAW MILLS will be shown in operation, until Nov. 15, at the Fair of the American Institute, New York City. For circular and price list, address Lane Manufacturing Company, Montpelier, Vermont.

A FULL SET OF IMPROVED CLAPBOARD MACHINERY will be exhibited at the Fair of the American Institute by the Lane Mf'g Co., Montpelier, Vt

FOR SALE—The right to manufacture and Sell the Patent Stave Grain Baskets in the States of Ohio, Pennsylvania, and New York. Said Baskets protected by numerous patents issued to Horace C. Jones and others. G. I. BREWSTER, Appleton, Wis.

NUMEROUS TESTS HAVE PROVED
N.F. BURNHAM'S NEW TURBINE
WATER WHEEL
TO BE THE BEST EVER INVENTED
PAMPHLET FREE. ADDRESS, YORK, PA

SUPERIOR TO ALL OTHERS.

LIMET & CO.'S STANDARD
FRENCH FILES.
HOMER, FOOT & CO., SOLE AGENTS,
20 Platt Street, New York.
☞ A full assortment of STUBS' and GROBET'S Files.

THE
SCIENCE RECORD
FOR
1873.

A Compendium of the Scientific Progress and Discoveries of the Preceding Year. Illustrated with over 150 Engravings. 600 pages, octavo. Price, $2.



THIS NEW AND splendid book embraces the most interesting Facts and Discoveries in the various Arts and Sciences that have transpired during the preceding year exhibiting in one view the General Progress of the World in the following Departments:

1.—CHEMISTRY AND METALLURGY.
2.—MECHANICS AND ENGINEERING.
3.—ELECTRICITY, LIGHT, HEAT, SOUND.
4.—TECHNOLOGY.—Embracing New and Useful inventions and Discoveries relating to THE ARTS:
5.—BOTANY AND HORTICULTURE.
6.—AGRICULTURE.
7.—RURAL AND HOUSEHOLD ECONOMY.
8.—MATERIA MEDICA, THERAPEUTICS, HYGIENE
9.—NATURAL HISTORY AND ZOOLOGY.
10 & 11.—METEOROLOGY TERRESTRIAL PHYSICS, GEOGRAPHY.
12.—GEOLOGY AND MINERALOGY.
13.—ASTRONOMY
14.—BIOGRAPHY.

Every person who desires to be well informed concerning the Progress of the Arts and Sciences should have a copy of SCIENCE RECORD FOR 1873. It is a most interesting and valuable Book, and should have a place in every Household, in every Library.

600 pages, Octavo. Handsomely Bound. Over 150 Engravings. Price, $2.

Sent by mail to all parts of the country, on receipt of the price. A liberal discount to the trade and to canvassers. For sale at all the principal Bookstores.

MUNN & CO., PUBLISHERS,
37 Park Row, New York City.

THE *SCIENTIFIC AMERICAN* will be sent one year and one copy of *SCIENCE RECORD FOR* 1873, on receipt of $4·50.

SCIENCE RECORD FOR **1872**, uniform with the above, Price $3. Library binding, $3.50.

© 1873 SCIENTIFIC AMERICAN, INC

BAIRD'S BOOKS

FOR PRACTICAL MEN.

—o—

My new, revised and enlarged Catalogue of PRACTICAL AND SCIENTIFIC BOOKS—96 pages, 8vo.—will be sent, free of postage, to any one who will favor me with his address.

HENRY CAREY BAIRD,
INDUSTRIAL PUBLISHER,
406 WALNUT STREET, Philadelphia.

—:o:—

IMPORTANT BOOKS

ON

Metals and Metal Working.

Bauerman's Metallurgy of Iron. 12mo. $2.00

Blinn's Practical Workshop Companion for Tin, Sheet Iron and Copperplate Workers. 100 illustrations. 12mo.....$2.50

Bell's Chemical Phenomena of Iron Smelting. An Experimental and Practical Examination of the circumstances which determine the Capacity of the Blast Furnace, the Temperature of the Air, and the Proper Condition of the Material to be Operated Upon. By I. Lowthian Bell. 8vo.....$6.00

Byrnes' Practical Metal Workers' Assistant. A new edition, to which is added an Appendix containing The Manufacture of Russian Sheet Iron; The Manufacture of Malleable Iron Castings, and Improvement in Bessemer Steel. With over 600 engravings. 8vo.....$7.00

De Koninck—Dietz. A Practical Manual of Chemical Analysis and Assaying. By L. L. De Koninck, Dr. Sc., and E. Dietz, Engineer. Edited with Notes, by Robert Mallet. American Edition, with Notes and an Appendix on Iron Ores by A. A. Fesquet.....$2.50

Guettier's Practical Guide for the Manufacture of Metallic Alloys. Comprising their Chemical and Physical Properties, Preparation, Composition and Uses. 12mo.....$3.00

Landrin's Treatise on Steel. 12mo. ... $3.00

Larkin's Practical Brass and Iron Founders' Guide. 12mo.....$2.25

Napier's Manual of Electro-Metallurgy. Illustrated. 12mo.....$2.00

Overman's Manufacture of Steel. 12mo. $1.50

Overman's Moulder and Founders' Guide. Illustrated. 12mo.....$1.50

Osborn's Metallurgy of Iron and Steel. Theoretical and Practical, in all its branches, with special reference to American Materials and Processes. Illustrated by numerous large folding plates and wood engravings. 8vo.....$12.50

Perkins and Stowe's New Guide to the Sheet Iron and Boiler Plate Roller.....$2.50

Phillips and Darlington's Records of Mining and Metallurgy. Illustrated. 12mo.....$2.00

Percy's Manufacture of Russian Sheet Iron. 8vo. Paper.....50c.

Roseleur's Galvanoplastic Manipulations. A Practical Guide for the Gold and Silver Electro-plater and the Galvanoplastic Operator. 127 engravings. 495 pages. 8vo.....$6.00

Schinz's Researches on the Action of the Blast Furnace. Illustrated. 12mo.....$4.25

Strength and other Properties of Metals. Illustrated by 25 large steel plates. 4to.....$10.00

Tables Showing the Weight of Round, Square and Flat Bar Iron, Steel, &c., by measurement.....63c.

Urbin and Brull's Practical Guide for Puddling Iron and Steel. 8vo.....$1.00

Vail's Galvanized Iron Cornice Workers' Manual. Containing Instructions in laying out the different Miters and making Patterns for all kinds of plain and circular work. Illustrated. 4to.....$5.00

Watson's Practice of American Machinists and Engineers. Illust'd by 86 engravings. 12mo..$2.50

Warn's Sheet Metal Workers' Instructor, for Zinc, Sheet Iron, Copper and Tin Plate Workers, with Instructions for Boiler Making, &c. 8vo.....$3.00

☞ The above, or any of my Books, sent by mail, free of postage, at the publication prices.

My new and enlarged CATALOGUE OF PRACTICAL AND SCIENTIFIC BOOKS—96 pages, 8vo.—sent free to any one who will furnish his address.

HENRY CAREY BAIRD,
Industrial Publisher,
406 Walnut St., PHILADELPHIA.

JUST PUBLISHED,

A Fresh Work on Mining.

SILVER AND GOLD:

An Account of the Mining and Metallurgical Industry of the United States, with reference chiefly to the Precious Metals. By R. W. RAYMOND, Ph. D., U. S. Commissioner of Mining Statistics, President of the Am. Inst. of Mining Engineers, editor of "Engineering and Mining Journal," Author of "Mines of the West," "American Mines and Mining," "Mines, Mills, and Furnaces," etc., etc.

WITH PLATES.

1 *Vol.*, 8*vo. Extra Cloth.* $3.50.

The energy and thoroughness with which Mr. Raymond has prosecuted his investigations, and the rare intelligence and intimate acquaintance with mining and metallurgy, manifested in his writings on these subjects, have been widely acknowledged, and his reputation will ensure an interest in this, his latest work.

*** To be had of Booksellers, or will be sent to any address, post-paid, on receipt of price, by the Publishers,

J. B. FORD & CO.,
27 Park Place, New York,

FOR SALE—A most important, useful and valuable invention. An independent fortune to any party who desires to handle. Applications should be made immediately. Address S., care G. E. HUTCHINSON, 144 Superior Street, Cleveland, O.

$375 A MONTH to Male or Female Agents. NOVELTY CO., Biddeford, Me.

---

12 Samples sent by mail for 50 cts., that retail quick for $10. R. L. WOLCOTT, 181 Chatham Square, New York.

A Rare Chance to Advertise.

Cheapest and Best Mode of Introducing
NEW MACHINERY AND INVENTIONS.

—:o:—

To Advertisers.

About the 15th of November, we shall publish a SPECIAL edition of 60,000 copies of the SCIENTIFIC AMERICAN, which will be mailed in separate wrappers and the postage prepaid to every post office in the United States, Canada, and adjoining provinces.

It is intended that a copy of the paper shall reach the principal manufacturers, workers in lumber and and iron, railroad shops, and the works of other mechanical and chemical industries in the United States. Advertisements will be taken for this extra edition on the same terms as in the regular issue, namely, 75 cents a line inside, and $1 a line on last page. A few notices, in the Business and Personal column, not exceeding four lines in length, will be inserted at $1.50 a line. This affords an unusually favorable opportunity for advertisers to reach a class of persons not accessible in the ordinary channels of advertising. The names have been selected with care, and the publishers guarantee the number issued to be full 60,000; the postage on these copies, which is twelve hundred dollars, will be prepaid, thus insuring the prompt forwarding of the papers to their destination.

Advertisers will bear in mind that this announcement is for a *Special* Edition which is to be circulated gratuitously among non-subscribers, and that the same advertisements which appear in the regular edition, if ordered in the extra, will be seen by entirely different persons.

ENGRAVINGS.

A few illustrations and descriptions of machines or articles of utility, whether they have already appeared in this paper or in other publications, will be received for insertion in this Special Edition on reasonable terms.

MUNN & CO., Publishers.

MAN POWER SAWS.
Circular, Jig, Band & Bench.

See "Sci. Am.," Vol. 26, p. 366; Vol. 28, p. 79 & 306.
☞ FOR SPEED AND WORK UNEQUALED.
Combined Power Co., 23 Dey St., N.Y.

A. S. GEAR,

Sole Owner and Manufacturer of the GEAR VARIETY MOULDING MACHINE—Legality of Patents Sustained in United States Courts—Price $150, $175, $230, $430, $530—and Manufacturer and Dealer in all kinds of

Wood and Iron Working
MACHINERY,

Steam Engines & Mechanical Supplies,
56 TO 62 SUDBURY ST., BOSTON, MASS.

Reasons in Support of our Claim to favorable consideration.

1. What we manufacture we exclusively control for the whole country by patents granted to us or purchased by us.
2. Instead of attempting to evade others' rights by manufacturing to get around good machines, we select and purchase them from legal owners.
3. We sell at the market price, and as low as producers, being satisfied with very small profits on large sales.
4. We ship machinery from the factories where it is made, so that the freights are the same as if purchased of the manufacturers.
5. We guarantee to furnish THE LATEST IMPROVED machinery known, and that which is best suited to the work to be performed.
6. We sell original and legal productions only, thus preventing trouble with owners of patents for infringements and costly litigations; and we also warrant every machine to be as represented.
7. We give special attention to fitting out shops complete, and by a consolidation of profits and saving of expense incident to selecting, are enabled to furnish all that the various manufacturers produce at as low, if not lower rates than they can be purchased of others.
8. An experience, extending over a period of twenty years, in the examination of all new contrivances as soon as known, and learning from users what they consider the best products, warrants us in saying that we can save purchasers a great deal of trouble and money by giving us their patronage.
9. Our interest being also *the purchaser's interest*, we cannot afford to displease or misrepresent, therefore we make all our transactions of mutual benefit to THE GOOD BUILDER, THE PURCHASER and OURSELF.
10. We fill orders as designated by purchasers, or, when it is desired, select and send the best known—support the good and denounce the bad—and by keeping thoroughly posted, often furnish a good tool or machine but little known at a cost much less than the stiff price demanded for others which are no better.
11. Our unprecedented success warrants us in keeping ordered ahead a large supply of good machinery, besides keeping at our warerooms a larger stock than can be found anywhere else in the United States. We also feel safe in saying that we can ship and deliver machinery as soon, if not sooner, than others.
12. Send for Catalogue and Circulars, and ask any questions regarding any mechanical product or device, which will be cheerfully answered.

MACHINERY, NEW and 2d-HAND.—Send for Circular. CHAS. PLACE & CO. 60 Vesey st., New York.



The American Turbine Water Wheel,

Recently improved and submitted to thorough scientific tests by James Emerson, showing the following useful effect of the power of the water utilized, being the highest results ever known.

Percentage of Part Gate: ¼, 50.08; ½, 69.64; ⅝, 78.73; ¾, 82.53; ⅞, 82.90. Per cent. of Whole Gate: 83.14.

A full report may be obtained of STOUT, MILLS & TEMPLE, Dayton, Ohio.

1832. SCHENCK'S PATENT. 1871.

WOODWORTH PLANERS

And Re-Sawing Machines, Wood and Iron Working Machinery, Engines, Boilers, etc. JOHN B. SCHENCK'S SONS, Matteawan, N. Y. and 118 Liberty St., New York.

To Electro-Platers.

BATTERIES, CHEMICALS, AND MATERIALS, in sets or single, with books of instruction for Nickel or Silver Plating, by THOMAS HALL, Manufacturing Electrician, 19 Bromfield Street, Boston, Mass. Illustrated catalogue sent free.

TO MACHINISTS.

FOR SALE—One Cast Iron Fly Wheel Pulley, 12 feet dia., 24 in. face—bored for 10 in. shaft—turned true—in halves—weighs 7800 lbs. Price $300.

76 feet 5 inch Wro't Iron Steam Pipe—flange joints—with elbow. Price $1.50 per foot.

120 feet 18 inch and 75 feet 24 inch best doubled and pegged, cemented oak tanned Leather Belting, in good order. Price 50 per cent from list. Also,

2 Single-flue Boilers, 42 inch dia., 32 feet long.
1 do. do 42 " " 25 " "

For further information, address
MARSHALL P. SMITH,
40 P. O. Avenue, Baltimore, Md

A Set of 12 Steel Lathe Dogs,

From ⅜ to 4 inch.....$17.30
" " to 2 " .....$ 8.00
Iron, from ⅜ to 2 inch.....$ 6.50
" " " to 4 " $15.00
1 Set of Steel Clamps.....$12.50
" " Iron " $10.00
Expanding Mandrels taking anything from ½ to 4 inches, &c.

Send to C. W. LE COUNT, South Norwalk, Conn., for Circular.

$5 to $20 per day! Agents wanted! All classes of working people, of either sex, young or old, make more money at work for us in their spare moments or all the time than at anything else. Particulars free. Address G. STINSON & Co., Portland, Maine.

SHINGLE AND BARREL MACHINERY.—Improved Law's Patent Shingle and Heading Machine, simplest and best in use. Also, Shingle Heading and Stave Jointers, Stave Equalizers, Heading Planers, Turners, &c. Address TREVOR & Co. Lockport, N. Y.

WOOD WORKING MACHINERY



MOLDING, MORTISING
TENONING & SHAPING
MACHINES;
BAND SAWS,
SCROLL SAWS,
Planing & Matching
MACHINES, &c.,
For RAILROAD, CAR, and AGRICULTURAL SHOPS, &c.,
☞ Superior to any in use.

J. A. FAY & CO.
CINCINNATI, Ohio.

STENCIL DIES For cutting business Stencils, all sizes. Also complete OUTFITS for Clothing Stencils and Key Checks, with which young men are making from $5 to $20 a day. Send for catalogue and samples to S. M. SPENCER, 117 Hanover St., Boston, Mass.

NEW & IMPROVED PATTERNS.—MACHINISTS' TOOLS—all sizes—at low prices. E. GOULD, 97 to 113 N. J R. R. Ave., Newark, N. J

OTIS' SAFETY HOISTING **Machinery.**
OTIS, BROS. & CO.,
NO. 348 BROADWAY NEW YORK.

WOOD-WORKING MACHINERY GENERALLY. Specialties, Woodworth Planers and Richardson's Patent Improved Tenon Machines. Central, corner Union st., Worcester, Mass.
WITHERBY RUGG & RICHARDSON.



WENDELL'S PATENT DOOR STOP.
1000 AGENTS WANTED.
$5 per day. Samples, 25 Cts.
Wendell & Francis, 436 Walnut St. Phila.

GLASS MOULDS for Fruit Jars, Patent Lamps, Bottles, etc., made by H. BROOKE, 14 years at White and Centre Streets, New York. The shortest and cheapest way order direct of Mould Maker.
☞ PARTICULAR ATTENTION paid to MOULDS for INVENTORS.

You ask WHY we can sell First Class 7 Octave Pianos for **$290?** We answer—It costs less than **$300** to make any **$600** Piano sold through Agents, all of whom make **100 per ct.** profit. We have no Agents, but ship direct to families at Factory price, and warrant 5 Years. Send for illustrated circular, in which we refer to over **500** Bankers, Merchants, &c. (some of whom you may know), using our Pianos, in **44** States and Territories. Please state where you saw this notice.

U. S. Piano Co., 810 Broadway, N. Y.

RICHARDSON, MERIAM & CO. Manufacturers of the latest improved Patent Danels' and Woodworth Planing Machines, Matching, Sash and molding, Tenoning, Mortising, Boring, Shaping, Vertical, and Circular Re-sawing Machines, Saw Mills, Saw Arbors, Scroll Saws, Railway, Cut-off, and Rip-saw Machines, Spoke and Wood Turning Lathes, and various other kinds of Wood-working Machinery. Catalogues and price lists sent on application. Manufactory, Worcester, Mass. Warehouse, 107 Liberty st. New York. 17

PAGE'S Water Flame Coal Lime Kiln, with coal or wood. No. 1 Soft White Lime or Cement, with use of water. C.D. PAGE, Patentee, Rochester, N.Y.

PATENT COLD ROLLED SHAFTING.

The fact that this shafting has 75 per cent greater strength, a finer finish, and is truer to gage, than any other in use, renders it undoubtedly the most economical. We are also the sole manufacturers of the CELEBRATED COLLINS PAT. COUPLING, and furnish Pulleys, Hangers, etc., of the most approved styles. Price lists mailed on application to JONES & LAUGHLINS,
Try street, 2d and 3d avenues, Pittsburgh, Pa.
190 S. Canal st., Chicago.

☞ Stocks of this Shafting in store and for sale by FULLER, DANA & FITZ, Boston, Mass.
GEO. PLACE & CO., 121 Chambers street, N. Y.
PIERCE & WHALING, Milwaukee, Wis.

PUNCHING AND DROP PRESSES. For the **Best** and **Cheapest** Address THE STILES & PARKER PRESS CO. MIDDLETOWN, CONN.

WOODBURY'S PATENT
Planing and Matching
and Molding Machines, Gray & Wood's Planers, Self-oiling Saw Arbors, and other wood working machinery.
S. A. WOODS, { 91 Liberty street, N. Y.;
Send for Circulars. { 67 Sudbury street, Boston.

ENGINES, BOILERS PUMPS, &c

Bought, sold and exchanged. All sizes and kinds constantly on hand. Address, for circular, E. E. ROBERTS 52 Broadway, New York.

Andrew's Patents.

Noiseless, Friction Grooved, or Geared Hoisters, suited to every want.
Safety Store Elevators. Prevent Accident, Rope, Belt, and Engine break.
Smoke-Burning Safety Boilers.
Oscillating Engines, Double and Single, 1-2 100-Horse power.
Centrifugal Pumps, 100 to 100,000 Gallons per Minute, Best Pumps in the World, pass Mud, Sand, Gravel, Coal, Grain, etc., with out injury.
All Light, Simple, Durable, and Economical. Send for Circulars.
WM. D. ANDREWS & BRO.,
414 Water Street, New York.

$425. Upright Engine and Tubular Boiler (4) HORSE POWER, with all Trimmings; also (10) HORSE POWER. Send for Circulars.
VARIETY IRON WORKS Co., Cleveland, O.

WHALEN TURBINE. No risks to purchaser. Pamphlet sent free. SETH WHALEN, Baliston Spa, N. Y.

MILLING MACHINES.
Universal and Plain—Gear and Cam Cutting, &c.
Send for descriptive catalogue to
BRAINARD MILLING MACH. CO.
115 Water St. Boston

$425 A MONTH! Horse and carriage furnished. Expenses paid. H. B. SHAW, Alfred, Me

---

THE HORTON LATHE CHUCK, from 4 to 36 inches, with the new Patent Jaw. Address THE E. HORTON & SON CO., Windsor Locks, Ct

---

BUERK'S WATCHMAN'S TIME DETECTOR.—Important for all large Corporations and Manufacturing concerns—capable of controlling with the utmost accuracy the motion of a watchman or patrolman, as the same reaches different stations of his beat. Send for a Circular. J. E. BUERK,
P. O. Box 1,057 Boston, Mass.

N. B.—This detector is covered by two U. S. Patents, Parties using or selling these instruments without authority from me will be dealt with according to law.

Machinery,

Wood and Iron Working of every kind. Leather and Rubber Belting, Emery Wheels, Babbitt Metal, &c. GEO. PLACE & CO., 121 Chambers St, N.Y.

Cold Rolled Shafting.

Best and most perfect Shafting ever made, constantly on hand in large quantities, furnished in any lengths up to 24 ft. Also, Pat. Coupling and Self-oiling adjustable Hangers. GEORGE PLACE & CO.,
121 Chambers Street, New York.

Sturtevant Blowers.

Of every size and description, constantly on hand.
GEORGE PLACE & CO.,
121 Chambers Street, New York.

PATENT PUNCHING SHEARING MACHINES,

With all Modern Improvements, in forms adapted to every kind of work. WARRANTED SUPERIOR TO ALL OTHERS.

Presses adapted to all kinds of work in store ready for shipment.

MOSES G. WILDER, 121 Chambers St., New York

WORKING CLASS Male or Female, $20 week, employment at home, day or evening; no capital; instructions & valuable package of goods sent free by mail. Address, with six cent return stamp, M. YOUNG & CO., 173 Greenwich St., N.Y

WROUGHT IRON BEAMS & GIRDERS

THE Union Iron Mills, **Pittsburgh, Pa.** The attention of Engineers and Architects is called to our improved Wrought-iron Beams and Girders (patented), in which the compound welds between the stem and flanges, which have proved so objectionable in the old mode of manufacturing, are entirely avoided, we are prepared to furnish all sizes at terms as favorable as can be obtained elsewhere. For descriptive lithographic address Carnegie, Kloman & Co, Union Iron Mills, Pittsburgh, Pa.

SILICATES OF SODA & POTASH, SOLUBLE GLASS in all forms. Chloride of Calcium. Magnesia in native form. Hydrofluoric Acid. Nickel Salts, Sulphate and Chloride. Metals and Metallic Oxides. Felspar, Flint, and Fluorspar finely ground. Manganese, Black Oxide. All rare Chemicals and Drugs made to order by L. & J. W. FEUCHTWANGER, Chemists and Importers, 55 Cedar Street, New York.

Editors of Treatises on "Gems," $5.24 per copy; "Fermented Liquors," $3 12 per copy; "Soluble Glass," $1 per copy; "Nickel," 50c. per copy. All mailed free.

REYNOLDS'



Turbine Water Wheels.

30 years' experience enables me to excel in Gearing Mills of all kinds, and furnishing them **reliable,** economical power. Scientific pamphlet free. GEO. TALLCOT, 96 Liberty Street, New York.

PERFECTION OF SPEED ON WATER WHEELS secured by the Rotary Hydraulic Governor, under all possible conditions. Never fails. Under extreme changes, it operates the entire gate in ten seconds. Warranty unlimited. No pay till tested. JOHN S. ROGERS, Treas., 19 John Street, Boston, Mass.

Pass This By if you are a fool or lunatic, but if you are sane and wish to make money address, EUREKA PORTABLE TABLE Co., St. Louis.

$125 A MONTH to Lady Agents everywhere Address ELLIS MANUF'G Co., Waltham, Mass

---

Niagara Steam Pump.

CHAS. B. HARDICK,
23 Adams st., Brooklyn, N. Y.

PRICE ONLY 10 CENTS PER POUND.
Thomas's Fluid Tannate of Soda removes Scale and does not injure Boiler. It proves entirely satisfactory where all other preparations have failed. One party writes: "Each application removed two bushels of scales from his Boiler, and the Iron looks well where the scales have come off, and it is saving about 15 per cent of fuel." Sold in Barrels 500 lb, half Barrels 250 lb., quarter Barrels 125 lb. Address orders to N. SPENCER THOMAS, Elmira, N. Y.

$100 to 250 per month guaranteed sure to Agents everywhere selling our new seven strand **White Platina Clothes Lines.** Sells readily at every house. Samples free. Address the GIRARD WIRE MILLS, Philadelphia, Pa.

WOODWORTH SURFACE PLANERS, $125. Planers and Matchers, $350. S. C. HILLS 51 Courtlandt street New York.

AGENTS WANTED EVERYWHERE—Splendid work all winter. Patent Door Spring and Novelties. $20 a day can be made. Address NOVELTY EMPORIUM, 418 Locust Street, St. Louis, Mo.

© 1873 SCIENTIFIC AMERICAN, INC

Advertisements.

Advertisements will be admitted on this page at the rate of **$1.00** *per line for each insertion. Engravings may head advertisements at the same rate per line by measurement, as the letter-press.*

The value of the SCIENTIFIC AMERICAN *as an advertising medium cannot be over-estimated. Its circulation is ten times greater than that of any similar journal now published. It goes into all the States and Territories, and is read in all the principal libraries and reading-rooms of the world. We invite the attention of those who wish to make their business known to the annexed rates. A business man wants something more than to see his advertisement in a printed newspaper. He wants circulation. If it is worth 25 cents per line to advertise in a paper of three thousand circulation, it is worth $8.75 per line to advertise in one of forty-five thousand.*

PRATT'S ASTRAL OIL.

Safest and best Oil ever made—burns in any lamp—for sale everywhere. CHAS. PRATT & CO.
Established 1770. 108 Fulton street, N. Y.

THE TANITE COMPANY
Emery Wheels — TANITE — Emery Grinders
STROUDSBURG — MONROE Co. PA.

JUST PUBLISHED!

"Facts and Suggestions regarding the Right Choice and Right Use of Solid Emery Wheels and Emery Grinding Machinery." 124 pages.

This Pamphlet is offered to the Public as the most complete Manual on the subject of Emery Grinding yet published. Sent, post-paid, on receipt of 25 cents.
Address **THE TANITE CO., Stroudsburg, Pa.**

—:o:—

HOW ABOUT YOUR PAY ROLL?

Is not THIS the time—now when working forces are being reduced, and each man's effort is to see *how* FEW *hands* he can get along with—is not this the time to study carefully the claims of *labor-saving tools?* How much Wages will a good Emery Grinding Machine draw? How many men now working with File, and Grindstone, and Cold Chisel, and Vise, can be dispensed with by running a Rotary File a mile a minute? How many Pay Roll Swelling men will it take to do, with Vise and File, what ONE man will do with that never-dulling Rotary File, a Tanite Emery Wheel? That File whose points are crystals of Adamant, and whose speed is as 5,500 feet to 60 feet.

When money is scarce, Labor Saving Tools are cheap!

And Shaped Diamond Carbon Points, indispensable for Turning Emery Wheels, Grindstones, also Trueing up hardened Steel and Paper Calender Rollers, &c. Address J. DICKINSON, Patentee, 64 Nassau St., N.Y.

NEARLY 1,000 NOW IN USE.

We offer these Planers to our customers, believing them to be the best for the price that can be found. They will plane thinner and thicker, plane more and do it better than any other of their weight and price, and, at the same time, less liable to get out of order. These planers are capable of earning themselves and paying the expense of running them in from eight to ten days. They have met with merited success wherever they have been introduced, and never fail to give entire satisfaction. They will plane 5½ inches thick, and down to less than ⅛ inch in thickness, and in quantity from 8,000 to 18,000 feet in ten hours. Their extremely low price brings them within the reach of those of smaller means, and their small size (8x3 feet) adapts them to many small shops, where a large planer could not be used: and their simplicity renders them easy to be handled by the inexperienced. We manufacture three sizes, with either single or double rollers, 16, 20 and 24 inches wide.



Price of 16 inch Planer, single roller	$105.00
" 20 " " " "	120.00
" 24 " " " "	140.00
Price to plane 24 inch wide, double roller	165.00
" " 20 " " "	145.00
Price of Countershaft and Hangers	20.00
" Extra Cutters, per pair, 24 inch	7.00
" " " 20 "	6.00

For illustrated circulars, sent free, address GEORGE PARR, Manufacturer of Mechanics' Tools and Light Machinery, Buffalo, N. Y.

REYNOLDS & CO.
MANUFACTURE
Screws & Bolts
For Machinery of every variety.
ALSO
Bridge and Roof Bolts.
STEEL & IRON SET SCREWS
A specialty. Also, Small Articles for Patentees, in great numbers, at
No. 145 East St., New Haven, Conn

GLASS CUTTERS.

Our Glass Cutters are made with a handle like a Glazier's Diamond, but, instead of the diamond point, they have a small hardened Steel revolving wheel, the sharp edge of which cuts nearly as well as a diamond. They are durable, and will give entire satisfaction. Most Hardware Dealers keep them, or will send to us for them if wanted. Where they are not for sale, we will send one by mail, prepaid, on receipt of thirty-five cents.

We will send one to any Publisher who will insert this notice and forward us a copy prepaid. MILLERS FALLS COMPANY, No. 78 Beekman Street, New York.

HOUSTON'S PATENT
TURBINE WATER WHEEL.

Simplest, Strongest, Cheapest, Best.



In the test at Holyoke, in 1872, the Houston gave the **highest percentage ever shown** in a reliable test and the **highest average results ever obtained.** In practical use it is everywhere demonstrating its superiority over all others. Emerson's full report furnished on application. Send for Circular.
MERRILL & HOUSTON IRON WORKS,
Beloit, Wisconsin.

PORTABLE STEAM ENGINES, COMBINing the maximum of efficiency, durability and economy, with the minimum of weight and price. They are widely and favorably known, more than **1,000** being in use. All warranted satisfactory or no sale. Descriptive circulars sent on application. Address
THE J. C. HOADLEY CO. Lawrence, Mass.
Liberty st., New York.

Malleable Iron & Steel Castings

MADE TO PATTERN BY
CARR, CRAWLEY & DEVLIN.
OFFICE, 307 ARCH STREET, PHILADELPHIA, PA.,
Manufacturers also of FINE GREY IRON CASTINGS, and an assortment of BUILDING AND CABINET, CARRIAGE AND SADDLERY HARDWARE for the Trade.

SAWS

Todd & Rafferty Machine Co.

MANUFACTURERS OF
The celebrated Greene Variable Cut-Off Engine; Lowe's Patent Tubular and Flue Boilers; Plain Slide Valve Stationary, Hoisting, and Portable Engines. Boilers of all kinds. Steam Pumps, Mill Gearing, Shafting, &c.; Silk, Tow, Oakum, Bagging, Rope, Flax, and Hemp Machinery. Agents for the New Haven Manufacturing Co.'s Machinists' Tools; for Judson's Governors and Stop-Valves: Sturtevant Blowers; and Differential Pulley-Blocks. WAREROOMS. 10 BARCLAY ST., NEW YORK. WORKS, PATERSON, NEW JERSEY.

LUBRICATORS.

DREYFUS' transparent Self-acting Oilers, for all sorts of Machinery and Shafting, are reliable in all seasons, saving 75—95 per cent. The **SELF-ACTING LUBRICATOR** for Cylinders is now adopted by over 150 R. R. in the U. S., and by hundreds of stationary engines.
NATHAN & DREYFUS, 108 Liberty st., N.Y.

PORTLAND CEMENT,

From the best London Manufacturers. For sale by JAMES BRAND, 55 Cliff St., N. Y.
A Practical Treatise on Cement furnished for 25 cents

SUPER-HEATERS

Save fuel, and supply DRY steam. Easily attached to any boiler. HENRY W. BULKLEY, Engineer.
98 Liberty St., New York.

Pyrometers. For testing Ovens, Boiler flues, Blast furnaces, Super-Heated Steam, Oil Stills, &c.
Address HENRY W. BULKLEY, 98 Liberty St., New York.

B. F. STURTEVANT,

PATENTEE AND SOLE MANUFACTURER OF
PRESSURE BLOWERS & EXHAUST FANS
72 SUDBURY STREET BOSTON, MASS.
SEND FOR CATALOGUE, ILLUSTRATED WITH 40 ENGRAVINGS.

ALUMINOUS AND ORNAMENTAL
BUILDING PAPER
PAPER CARPETING AND OIL CLOTH.
☞ SEND FOR SAMPLES AND PRICE LIST.
W. H. H. ROGERS & CO., 2 & 3 College Place, New York.
F. N. DAVIS & CO., Beloit, Wis.

TRY THE VICTOR DRILL CHUCK.—Warranted to hold with a clasp of the hand. Triumphant at Vienna. HUBBARD & CURTISS MANUFACTURING CO., Address Middletown, Conn.

SCHLENKER'S PATENT
BOLT CUTTER
NEW INVENTION. ADDRESS,
HOWARD IRON WORKS, BUFFALO, N.Y.

WIRE ROPE.

JOHN A. ROEBLING'S SONS
MANUFACTURERS, TRENTON, N. J.
FOR Inclined Planes, Standing Ship Rigging Bridges, Ferries, Stays, or Guys on Derricks & Cranes, Tiller Ropes, Sash Cords of Copper and Iron, Lightning Conductors of Copper. Special attention given to hoisting rope of all kinds for Mines and Elevators Apply for circular, giving price and other information Send for pamphlet on Transmission of Power by Wire Ropes. A large stock constantly on hand at New York Warehouse No. 117 Liberty street.

AMERICAN SAW CO.,

No. 1 Ferry St., New York.
Movable-Toothed Circular Saws
PERFORATED CROSS-CUT,
AND
SOLID SAWS.
ALSO,
IVENS & BROOKES PATENT
Eccentric-Geared Power Press.

Machinist's Tools,

EXTRA HEAVY AND IMPROVED.
LUCIUS W. POND, MANUFACTURER
Worcester, Mass.
Warerooms, 98 Liberty Street, New York.
A. C. STEBBINS, Agent.



The "DANBURY"

UNIVERSAL JAW
DRILL CHUCK.

C. H. REID'S PATENT, AUGUST 12, 1873.
Most POWERFUL Chuck made. Holds drills from 0 to ¾, and by turning down shanks to ¾, will hold—without slipping in the *most trying work*—up to one inch, inclusive. Its action is *direct*, quick and positive. Mechanical movement is such that it cannot *clog, set*, or in *any way* "get out of order." Has now been in constant use six months, working *perfectly*. Every Chuck is sold on *full warrant*, to be returned and cash refunded if not entirely satisfactory Address F. A. HULL & CO., Manufacturers, Danbury, Ct.
Send for Illustrated Descriptive Circulars.

"Its points of especial excellence" are Strength, Accuracy, Durability, Cheapness.

STEAM BOILER AND PIPE
COVERING

Saves ten to twenty per cent. CHALMERS SPENCE CO., foot E. 9th St., N. Y.: 1202 N. 2nd St., St. Louis, Mo.

CARPENTERS

A specimen copy of the AMERICAN BUILDER mailed to you *free* by sending address to CHARLES D. LAKEY, Publisher, 23 Murray Street, New York.

WIRE ROPE.

John W. Mason & Co., 43 Broadway, New York.

IRON PLANERS, ENGINE LATHES, Drills, and other Machinists' Tools, of superior quality, on hand, and finishing. For sale low. For Description and Price address NEW HAVEN MANUFACTURING CO. New Haven, Conn.

RANSOM SYPHON CONDENSER perfects and maintains vacuum on Steam Engines at cost of one per cent its value, and by its use Vacuum Pans are run with full vacuum without Air Pump. Please call at the Company's office, Buffalo, N. Y. Circulars sent to any address.

STATIONARY AND PORTABLE STEAM ENGINES.
Babcock & Wilcox Patent Safety Boilers,
LEFFEL'S DOUBLE TURBINE WATER WHEEL.
SHAFTING, PULLEYS, HANGERS AND GEARING.
POOLE & HUNT, BALTIMORE.

"Soluble Glass,"

Manufactured by
L. & J. W. FEUCHTWANGER, New York.

BUILDING PAPER!

For Sheathing, Roofing, Deafening, Carpet Lining, and as a substitute for Plastering. Send for Samples and Circulars, to B. E. HALE & Co., 56 & 58 Park Place, N. Y., or ROCK RIVER PAPER CO., Chicago.

MAGIC LANTERNS AND STEREOPTICONS, for Public Exhibitions, Out-door Advertisements, etc., etc. A good paying investment for a man with small capital. Catalogues free.
McALLISTER, Optician, 49 Nassau St., New York.

INDEPENDENT
BOILER FEEDERS
SEND FOR ILLUSTRATED CATALOGUE
COPE & MAXWELL MFG. CO.
HAMILTON, OHIO.

BUILDERS SEND FOR BOOK CATALOGUE
BICKNELL, 27 Warren st., N.Y

Working Models

And Experimental Machinery, Metal, or Wood, made to order by J. F. WERNER, 62 Center st., N. Y.

A RARE OPPORTUNITY—A Manufacturing Business established twenty-four (24) years FOR SALE—Soap and Candle Works, with Machinery for Lard Oil, Potashery and Baking Powder, in complete working order, and now in operation, and is capable of being extended to any amount; situated in one of the most *active* and prosperous cities, of Forty Thousand (40,000) inhabitants (*with no other Factory of the kind*), and one of the best Railroad and lake Shipping and receiving points in the great West. The property is finely situated, *large lot*, with a brick building Three (3) Stories high, 60 by 30, *New*—large Barn, wood. The property is increasing in value rapidly. My reasons for wishing to sell: I am not able to attend to the business; and, having lately lost my *only son* by death, conclude to quit. This property and business opening should be seen to be appreciated. For particulars, address the undersigned,
JOHN HOFFMAN,
80 Ontario Street, Toledo, Ohio

NOYE'S MILL FURNISHING WORKS are the largest in the United States. They make Burr Millstones, Portable Mills, Smut Machines, Packers, Mill Picks, Water Wheels, Pulleys and Gearing, specially adapted to flour mills. Send for catalogue.
J. T. NOYE & SON, Buffalo, N. Y.

☞ T. V. Carpenter, Advertising Agent. Address Box 773, New York city.

P. BLAISDELL & CO.,

MANUFACTURERS OF THE BEST
Patent Drill Presses, with Quick Return Motion,
In the Market, also other Machinist Tools.
SEND FOR CUTS.
WORCESTER, MASS.

ROGERS' TANNATE OF SODA, against incrustation in boilers; generally approved by Scientists and Engineers. Send for Book. FOUR OUNCES—COSTING ONLY 9 CENTS—DAILY, WILL CLEAN, AND KEEP CLEAN, AN AVERAGE BOILER WITH AVERAGE WATER AND PRESSURE. 35 cents the pound. Address JOS. G. ROGERS & CO., Madison, Ind. ☞ The manufacture or use of any form of Tannate of Soda, for above purpose, is our EXCLUSIVE right under patents. Any infringements of same will be vigorously prosecuted.

The Pulsometer or Magic Pump.

The simplest, most durable and effective steam pump now in use. Adapted to all situations and performs all the functions of a steam pump without its consequent wear and care. No machinery about it. Nothing to wear out. Will pump gritty or muddy water without wear or injury to its parts. It cannot get out of order.

C. HENRY HALL & CO.,
20 Cortlandt Street,
New York City.

KEEP YOUR BOILERS CLEAN.

ANTI LAMINA

prevents and removes scale in Steam Boilers—does not injure the Iron. In use over five years. Patented.
J. J. ALLEN'S SONS, Philadelphia, Pa.

MAHOGANY,

ROSEWOOD, WALNUT, WHITE HOLLY SATIN WOOD HUNGARIAN ASH, AND ALL KINDS OF WOODS, IN LOGS, PLANK, BOARDS, AND VENEERS.
GEO. W. READ & CO.,
Mill and Yard, 186 to 200 Lewis St., cor. 6th St., E. R., N. Y
☞ Orders by mail promptly and faithfully executed.
☞ Enclose 3c. stamp for Catalogue and Price List.

Veneer Cutting Machines FOR SALE.

ONE ROTARY MACHINE, cutting 4 ft. long and 4 ft. diameter.
ONE SLICING MACHINE, cutting 5 ft. 6 in. long.
Both in perfect order, with pulleys, shafting, etc. Complete for immediate use. Price low.
Address GEO. W. READ & CO.,
186 to 200 Lewis Street, E. R., New York.

CHAMPION SPRING MATTRESS—The latest and best improvement. Do you want a healthy and comfortable bed? Here it is. The softest, easiest, cheapest, most popular, and durable Spring Bed in market. Sold by all leading dealers. No stock complete without it. Wholly composed of tenacious tempered steel springs, so united that the pressure is equally distributed. Easily moved or carried about the house. Can be lifted, turned, or rolled up like a blanket. Both sides alike. No frame, no wooden slats, no straps. May be used on floor without bedstead. No under bed required. Needs only half thickness of hair mattress. The regular size double bed, 4 ft. 6 in. by 6 ft., contains 192 steel upholstery springs and weighs only thirty lbs. More springs for your money in this bed than in any other. Warranted noiseless. Any sizes made to order Send for pictorial circular. Retail price of double bed, $18. Shipped, by single bed or quantity, to all parts of the world. Liberal discount to the trade. Agents wanted. Champion Spring Mattress Co., Makers, 102 Chambers St., cor. Church New York.

SCIENTIFIC AMERICAN

The SCIENTIFIC AMERICAN is devoted to the interests of Popular Science, the Mechanic Arts, Manufactures, Inventions, Agriculture, Commerce, and the industrial pursuits generally, and is valuable and instructive not only in the Workshop and Manufactory, but also in the Household, the Library, and the Reading Room.

The Best Mechanical Paper in the World

A year's numbers contain over 800 pages and several hundred engravings of new machines, useful and novel inventions, manufacturing establishments, tools, and processes.

To the Mechanic and Manufacturer!

No person engaged in any of the mechanical pursuits should think of doing without the SCIENTIFIC AMERICAN. Every number contains from six to ten engravings of new machines and inventions which cannot be found in any other publication.

TERMS.

One copy, one year	$3.00
One copy, six months	1.50
One copy, four months	1.00
One copy of Scientific American for one year, and one copy of engraving, "Men of Progress"	10.00
One copy of Scientific American for one year, and one copy of "Science Record," for 1873	4.50

Remit by postal order, draft or express.

The postage on the Scientific American is five cents per quarter, payable at the office where received. Canada subscribers must remit, with subscription, 25 cents extra to pay postage.

Address all letters and make all Post Office orders and drafts payable to

MUNN & CO.,
37 PARK ROW NEW YORK

THE "Scientific American" is printed with CHAS. ENEU JOHNSON & CO.'S INK. Tenth and Lombard sts., Philadelphia, and 59 Gold st., New York

© 1873 SCIENTIFIC AMERICAN, INC